



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/18/07	~	LJC 08/18/07
B	DELETE WIRE GAUGE	JLZ 11/16/15'	~	LJC 11/16/15'
C	DRAWING UPDATE	JLZ 08/31/16'	~	

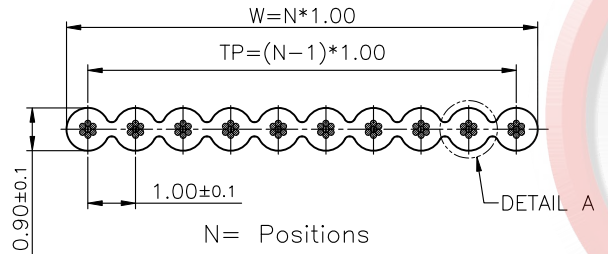


- NOTES:
- Insulation material: PVC
Color: Grey
 - SPECIFICATION
 - Rating: 300V
 - Conductor Size: 30AWG
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature: -20°C~70°C.
 - APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code
DS1057-01 - X X X X X - X

- Packing Specifications
 - 30.5: 30.5m/reel
 - 76.5: 76.5m/reel
- Edge mark
 - R: Red mark
 - F: Flower mark
- Wire diameter
 - 1: φ0.100 (30AWG)
- Wire AWG
 - 30: 30AWG
- Cable color
 - A: Gray
- No. Of positions
 - 10: 10pin
 - 64: 64pin

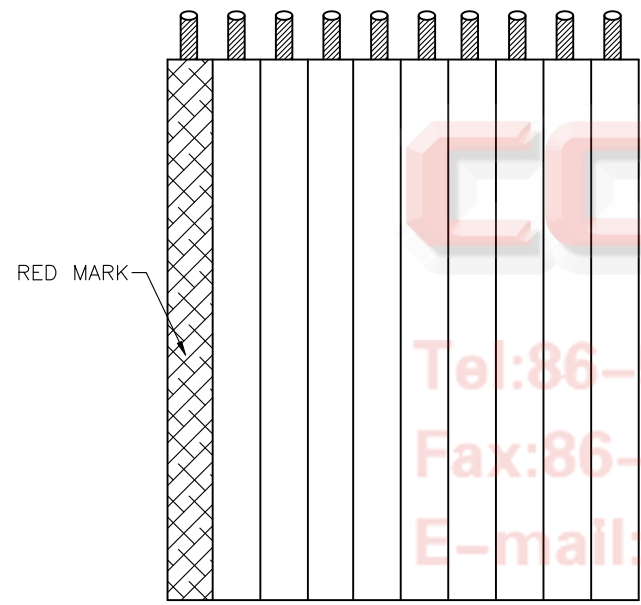

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
10	9.00	10.00	±0.30	φ0.100<0.397
14	13.00	14.00	±0.30	
16	15.00	16.00	±0.30	
20	19.00	20.00	±0.30	
24	23.00	24.00	±0.30	
26	25.00	26.00	±0.30	
30	29.00	30.00	±0.30	
34	33.00	34.00	±0.40	
40	39.00	40.00	±0.40	
50	49.00	50.00	±0.40	
60	59.00	60.00	±0.40	
64	63.00	64.00	±0.40	

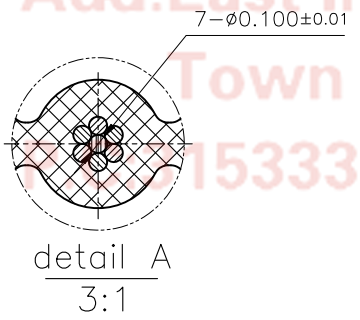

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1057-01-XXXXX-C		

PROJECTION		TITLE	UL 2651 PITCH 1.00mm FLAT CABLE	
UNITS	mm	SHEET SIZE	A4	SERIES DS1057-01

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel: 86-574-6350878
Fax: 86-574-6351981
E-mail: sale@connfly.com
http://www.connfly.com
Add: East Industrial Zone, Jiangyan Town Cixi Ningbo China
15333