







Features:

- High Quality Encapsulated Transformer
- Single/Dual Primary windings
- Power: 0.5 ~ 3.0 VA 50/60Hz
- Temperature Class: - Class B (130°C)
- Ambient temperature: +70°C
- Dielectric Strength: 4200Vrms
- Inherently Short-circuit proof
- Materials: UL94-V0
- Manufactured and tested in accordance to EN61558, EN60950, CE



Unused Pins will be omitted from standard parts.
Recommended Drill Hole Diameter for Pins: 1.0mm

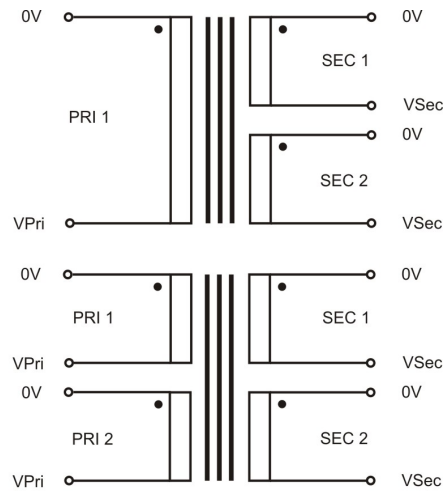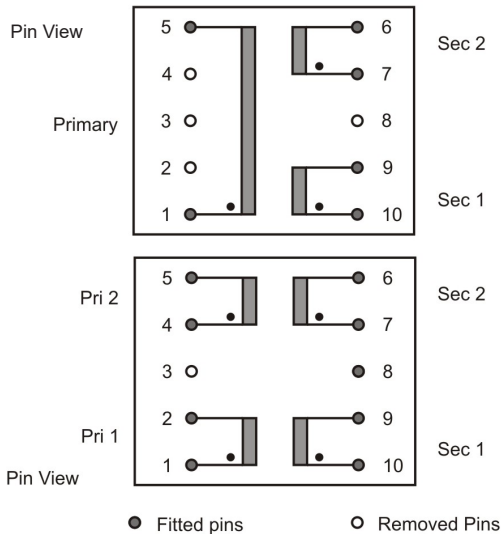

Windings can be connected in Parallel or Series

VA Rating	Dimension (mm)							Weight (g)
	A	B	C	D	E	F	G	
0.5	32.6	27.6	15.2	4	20	5	Sq 0.64	40
1.5	32.6	27.6	24	4	20	5	Sq 0.64	80
1.9	32.6	27.6	24	4	20	5	Sq 0.64	80
2.3	32.6	27.6	27	4	20	5	Sq 0.64	100
2.5	32.6	27.6	27	4	20	5	Sq 0.64	100
2.8	32.6	27.6	29.3	4	20	5	Sq 0.64	110
Tolerance	+/-0.5	+/-0.5	+/-0.5	+/-1.0	+/-0.5	+/-0.2	+/-0.1	approx

Please contact Vigortronix for any enquires. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

VA Rating	Part No	Input Voltage (Vac)	Output Voltage (Vac)	Output Current (mA)	ta (°C)	Approvals	
0.5	VTX-121-3005-206	230	2 x 6	50	70	UL / VDE CE	
0.5	VTX-121-3005-209	230	2 x 9	33	70		
0.5	VTX-121-3005-212	230	2 x 12	25	70		
0.5	VTX-121-3005-215	230	2 x 15	20	70		
0.5	VTX-121-3005-218	230	2 x 18	17	70		
0.5	VTX-121-3005-224	230	2 x 24	12	70		
1.5	VTX-121-3015-206	230	2 x 6	125	70		
1.5	VTX-121-3015-2075	230	2 x 7.5	100	70		
1.5	VTX-121-3015-209	230	2 x 9	83	70		
1.5	VTX-121-3015-212	230	2 x 12	62	70		
1.5	VTX-121-3015-215	230	2 x 15	50	70		
1.5	VTX-121-3015-218	230	2 x 18	42	70		
1.5	VTX-121-3015-224	230	2 x 24	31	70		
2.3	VTX-121-3023-206	230	2 x 6	191	70		
2.3	VTX-121-3023-209	230	2 x 9	127	70		
2.3	VTX-121-3023-212	230	2 x 12	95	70		
2.3	VTX-121-3023-215	230	2 x 15	76	70		
2.3	VTX-121-3023-218	230	2 x 18	63	70		
2.3	VTX-121-3023-224	230	2 x 24	48	70		
0.5	VTX-121-3005-406	2 x 115	2 x 6	50	70		CE
0.5	VTX-121-3005-409	2 x 115	2 x 9	33	70		
0.5	VTX-121-3005-412	2 x 115	2 x 12	25	70		
0.5	VTX-121-3005-415	2 x 115	2 x 15	20	70		
0.5	VTX-121-3005-418	2 x 115	2 x 18	17	70		
0.5	VTX-121-3005-424	2 x 115	2 x 24	12	70		
1.5	VTX-121-3015-406	2 x 115	2 x 6	125	70		
1.5	VTX-121-3015-4075	2 x 115	2 x 7.5	100	70		
1.5	VTX-121-3015-409	2 x 115	2 x 9	83	70		
1.5	VTX-121-3015-412	2 x 115	2 x 12	62	70		
1.5	VTX-121-3015-415	2 x 115	2 x 15	50	70		
1.5	VTX-121-3015-418	2 x 115	2 x 18	42	70		
1.5	VTX-121-3015-424	2 x 115	2 x 24	31	70		
2.3	VTX-121-3023-406	2 x 115	2 x 6	191	70		
2.3	VTX-121-3023-409	2 x 115	2 x 9	127	70		
2.3	VTX-121-3023-412	2 x 115	2 x 12	95	70		
2.3	VTX-121-3023-415	2 x 115	2 x 15	76	70		
2.3	VTX-121-3023-418	2 x 115	2 x 18	63	70		
2.3	VTX-121-3023-424	2 x 115	2 x 24	48	70		