

# HONEYWELL

## SS21PE

*See full Datasheet below...*

**onlinecomponents.com**

THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS



**BUY NOW**



**MASTER**<sup>TM</sup>  
ELECTRONICS

**BUY NOW**

masterelectronics.com & onlinecomponents.com  
are **authorized** e-commerce distributors  
of electronic components.

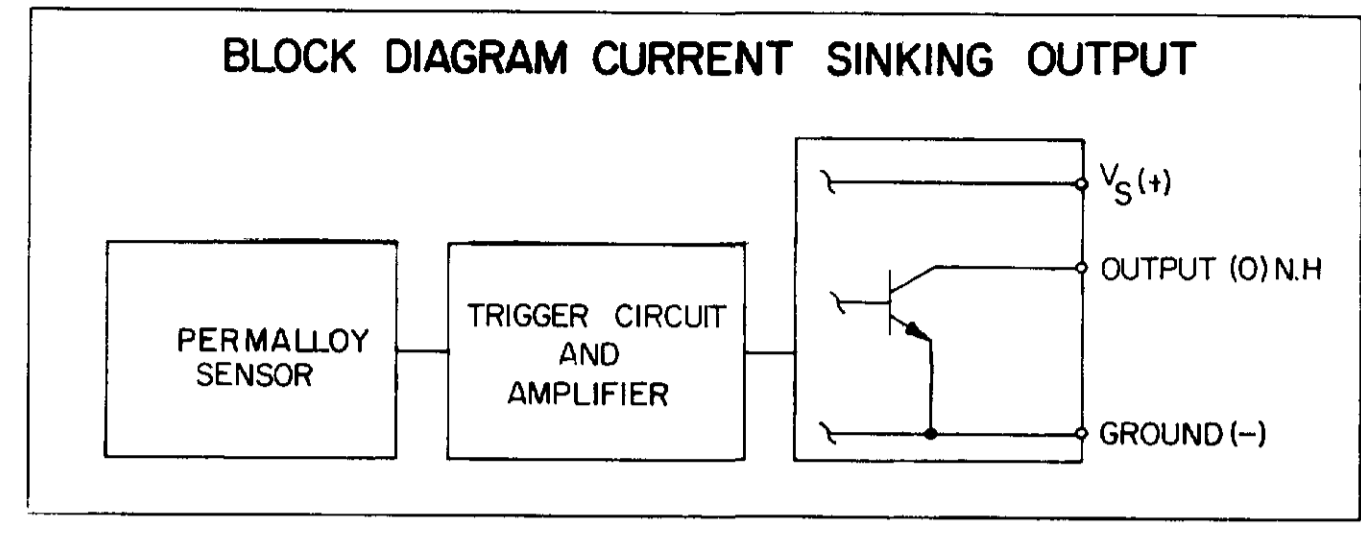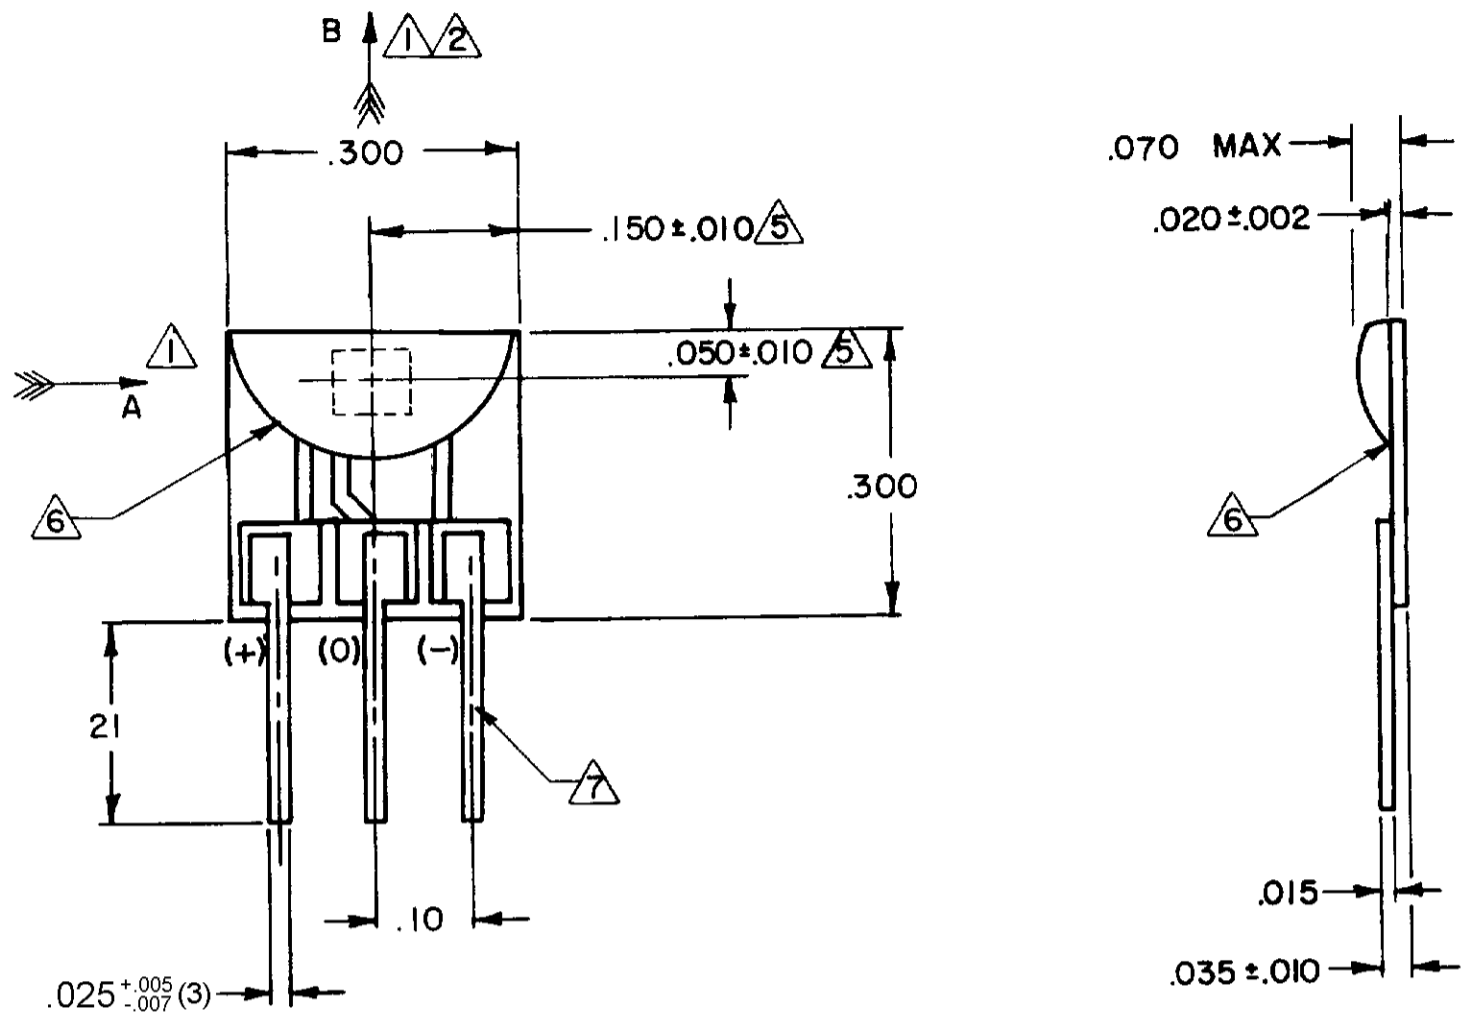

MAGNETIC CHARACTERISTICS $\sqrt{1}\sqrt{3}\sqrt{9}$				
TEMPERATURE RANGE	-20°C TO 85°C / 10		25°C	
	MAX	MIN	MAX	MIN
OPERATE GAUSS	25	9	25	9
RELEASE GAUSS	23	5	23	5
DIFFERENTIAL GAUSS	7	2	7	2

ABSOLUTE MAXIMUM RATING $\Delta$	
SUPPLY VOLTAGE (V <sub>S</sub> )	4.5 TO 5.5 VOLTS DC
VOLTAGE EXTERNALLY APPLIED TO OUTPUT	+20.0 VDC MAX WITH SWITCH IN "OFF" CONDITION ONLY -0.5 VOLTS MIN WITH SWITCH IN "OFF" OR "ON" CONDITION
OUTPUT CURRENT	20 mA
TEMPERATURE	-20°C TO 85°C
MAGNETIC FLUX	NO LIMIT, THE CIRCUIT CANNOT BE DAMAGED BY MAGNETIC OVERDRIVE

ELECTRICAL CHARACTERISTICS				
	MIN	TYP	MAX	REMARKS
SUPPLY CURRENT (WITHOUT LOAD) $\Delta$		2.5 mA	10.0 mA 5.5 mA	MAX (OPERATED) MAX (RELEASED)
OUTPUT VOLTAGE (OPERATED) $\Delta$		0.25V	0.40V	SINKING 20 mA MAX
OUTPUT LEAKAGE CURRENT (RELEASED) $\Delta$			10 $\mu$ A	LEAKAGE INTO SWITCH OUTPUT
OUTPUT SWITCHING TIME (SINKING 8 mA) $\Delta$				
RISE TIME		0.2 $\mu$ S	1.5 $\mu$ S	10% TO 90%
FALL TIME		0.1 $\mu$ S	0.5 $\mu$ S	90% TO 10%

- NOTES**
- $\Delta$  TO TEST THE SWITCH AGAINST THE SPECIFIED OPERATING CHARACTERISTICS THE SWITCH MUST BE PLACED IN A HELMHOLTZ COIL FIELD AND GIVEN THE FOLLOWING HISTORY: 35 GAUSS MINIMUM IN DIRECTION "A"; 35 GAUSS MINIMUM IN DIRECTION "B". TEST TO THE OPERATING CHARACTERISTICS IN DIRECTION "B" (THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF A MAGNET)
  - $\Delta$  THE SWITCH WILL OPERATE WITH THE FLUX FROM EITHER POLE OF A MAGNET WHEN APPLIED IN THE DIRECTION AND LOCATION SHOWN
  - $\Delta$  AT SUPPLY VOLTAGE OF 5 VDC AND OVER THE TEMPERATURE RANGE SPECIFIED AT 24° ± 2° C, AND 5 VDC ± 0.5% SUPPLY VOLTAGE
  - $\Delta$  INTEGRATED CIRCUIT PLACEMENT TOLERANCE
  - $\Delta$  PROTECTIVE HARD OVERCOAT
  - $\Delta$  SOLDER TERMINALS USING 60/40 ROSIN CORE SOLDER EMPLOYING A 750°F CONTROLLED TEMPERATURE 1/8 INCH CHISEL TIP SOLDERING IRON. CAUTION: THE SOLDER TIP SHOULD NEVER BE HELD ON THE TERMINAL FOR OVER 4 SECONDS IN ORDER TO AVOID DELAMINATION OF THE TERMINALS FROM THE CERAMIC
  - $\Delta$  ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THAT THE DEVICE WILL WITHSTAND WITHOUT DAMAGE TO THE DEVICE. HOWEVER, THE ELECTRICAL AND MAGNETIC CHARACTERISTICS ARE NOT GUARANTEED AS THE MAXIMUM LIMITS (ABOVE RECOMMENDED OPERATING CONDITIONS) ARE APPROACHED NOR WILL THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATING
  - $\Delta$  THE MAGNETIC CHARACTERISTICS OF THE SWITCH MAY BE AFFECTED BY STRAY MAGNETIC FIELDS
  - $\Delta$  FOR REFERENCE ONLY

DRAWING NUMBER: SS21PE  
 PAGE 1 OF 1  
 ISSUE: 7  
 REVISIONS:  
 A 00 00 00 15 MAR 00  
 B 0038691 14 APR 08  
 CHECK: BLR  
 CHECK: 13 MAR 00  
 CHECK: SAV  
 CHECK: 13 MAR 00  
 CHECK: 14 APR 08  
 REPLACES: X 81 129 - SS  
 RELEASE NO.: PR-21916  
 FORMTEK  
 DLM 13 MAR 00  
 SAV 13 MAR 00  
 DLM 13 MAR 00



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**MICRO SWITCH** a Honeywell Division      **SOLID STATE SWITCH**      CATALOG LISTING **SS21PE**

FED. MFG. CODE 91929

THIRD ANGLE PROJECTION		
SCALE NONE		
DO NOT SCALE PRINT		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±
WEIGHT		

MASTER REDUCED