

**Metallized Polypropylene (PP) Capacitors
in PCM 7.5 mm to 37.5 mm. Capacitances from 1000 pF to 10 µF.
Rated Voltages from 100 VDC to 2000 VDC.**

Special Features

- High volume/capacitance ratio
- Self-healing
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2011/65/EU

Typical Applications

For high frequency applications e.g.

- Sample and hold
- Timing
- Oscillating circuits
- High frequency coupling and decoupling

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

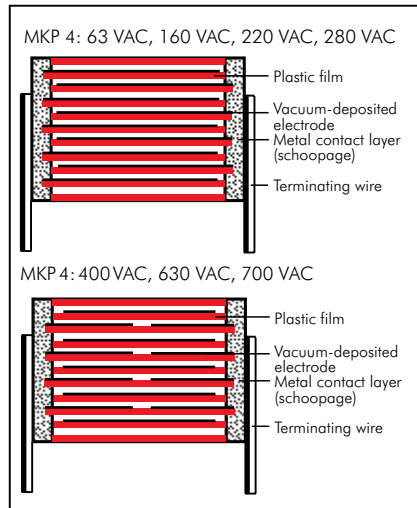

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Black.

Electrical Data

Capacitance range:

1000 pF to 10 µF (E12-values on request)

Rated voltages:

100VDC, 250VDC, 400VDC, 630VDC, 850VDC, 1000VDC, 1600VDC, 2000VDC

Capacitance tolerances:

±20%, ±10%, ±5%

Operating temperature range:

-55° C to +100° C

Climatic test category:

55/100/56 in accordance with IEC

Insulation resistance at +20° C:

$C \leq 0.33 \mu\text{F}$: $\geq 1 \times 10^5 \text{ M}\Omega$

$C > 0.33 \mu\text{F}$: $\geq 30\,000 \text{ sec (M}\Omega \times \mu\text{F)}$

Measuring voltage: 100 V/1 min.

Dissipation factors at +20° C:

at f	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$C > 1.0 \mu\text{F}$
1 kHz	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$
10 kHz	$\leq 8 \times 10^{-4}$	$\leq 8 \times 10^{-4}$	-
100 kHz	$\leq 25 \times 10^{-4}$	-	-

Test specifications:

In accordance with IEC 60384-16

Test voltage: $1.6 U_r$, 2 sec.

Dielectric absorption:

0.05%

Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from +85° C for DC voltages and from +75° C for AC voltages.

Reliability:

Operational life > 300 000 hours

Failure rate < 2 fit ($0.5 \times U_r$ and 40° C).

Maximum pulse rise time:

Capacitance pF/µF	max. pulse rise time V/µsec at $T_A < 40^\circ \text{C}$							
	100VDC	250VDC	400VDC	630VDC	850VDC	1000VDC	1600VDC	2000VDC
1000 ... 2200	-	-	-	-	2200	2200	3500	5200
3300 ... 6800	-	-	-	-	1150	1150	2700	3500
0.01 ... 0.022	450	450	450	500	550	550	1800	2700
0.033 ... 0.068	250	250	300	350	400	400	900	1800
0.1 ... 0.22	150	150	200	250	300	300	500	900
0.33 ... 0.68	100	100	150	200	200	200	-	-
1.0 ... 2.2	75	100	100	150	150	150	-	-
3.3 ... 4.7	60	100	100	120	140	140	-	-
6.8 ... 10	40	50	60	85	-	-	-	-

for pulses equal to the rated voltage

Mechanical Tests

Pull test on pins:

$d \leq 0.8 \phi$: 10 N in direction of pins

$d > 0.8 \phi$: 20 N in direction of pins

according to IEC 60068-2-21

Vibration:

6 hours at 10...2000 Hz and 0.75 mm

displacement amplitude or 10 g in

accordance with IEC 60068-2-6

Low air density:

1kPa = 10 mbar in accordance with

IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec²

in accordance with IEC 60068-2-29

Packing

Available taped and reeled up to and

including case size 15 x 26 x 31.5 /

PCM 27.5 mm.

Detailed taping information and graphs

at the end of the catalogue.

For further details and graphs please

refer to Technical Information.

Continuation

General Data


Capacitance	100 VDC/63 VAC*					250 VDC/160 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μ F	3	8.5	10	7.5	MKP4D021002B00_____	3	8.5	10	7.5	MKP4F021002B00_____
0.015 "	3	8.5	10	7.5	MKP4D021502B00_____	3	8.5	10	7.5	MKP4F021502B00_____
0.022 "	3	8.5	10	7.5	MKP4D022202B00_____	3	8.5	10	7.5	MKP4F022202B00_____
0.033 "	3	8.5	10	7.5	MKP4D023302B00_____	3	8.5	10	7.5	MKP4F023302B00_____
	4	9	13	10	MKP4D023303C00_____	4	9	13	10	MKP4F023303C00_____
0.047 "	4	9	10	7.5	MKP4D024702C00_____	4	9	10	7.5	MKP4F024702C00_____
	4	9	13	10	MKP4D024703C00_____	4	9	13	10	MKP4F024703C00_____
0.068 "	4	9	10	7.5	MKP4D026802C00_____	4	9	10	7.5	MKP4F026802C00_____
	4	9	13	10	MKP4D026803C00_____	4	9	13	10	MKP4F026803C00_____
0.1 μ F	4.5	9.5	10.3	7.5	MKP4D031002D00_____	4.5	9.5	10.3	7.5	MKP4F031002D00_____
	4	9	13	10	MKP4D031003C00_____	4	9	13	10	MKP4F031003C00_____
0.15 "	5	10.5	10.3	7.5	MKP4D031502E00_____	5	10.5	10.3	7.5	MKP4F031502E00_____
	5	11	13	10	MKP4D031503F00_____	5	11	13	10	MKP4F031503F00_____
0.22 "	6	12	13	10	MKP4D032203G00_____	6	12	13	10	MKP4F032203G00_____
	5	11	18	15	MKP4D032204B00_____	5	11	18	15	MKP4F032204B00_____
0.33 "	6	12.5	18	15	MKP4D033304C00_____	6	12.5	18	15	MKP4F033304C00_____
0.47 "	7	14	18	15	MKP4D034704D00_____	7	14	18	15	MKP4F034704D00_____
0.68 "	8	15	18	15	MKP4D036804F00_____	8	15	18	15	MKP4F036804F00_____
	6	15	26.5	22.5	MKP4D036805B00_____	6	15	26.5	22.5	MKP4F036805B00_____
1.0 μ F	7	16.5	26.5	22.5	MKP4D041005D00_____	7	16.5	26.5	22.5	MKP4F041005D00_____
1.5 "	10.5	19	26.5	22.5	MKP4D041505G00_____	10.5	19	26.5	22.5	MKP4F041505G00_____
2.2 "	11	21	26.5	22.5	MKP4D042205I00_____	11	21	26.5	22.5	MKP4F042205I00_____
	11	21	31.5	27.5	MKP4D042206B00_____	11	21	31.5	27.5	MKP4F042206B00_____
3.3 "	13	24	31.5	27.5	MKP4D043306D00_____	13	24	31.5	27.5	MKP4F043306D00_____
4.7 "	13	24	31.5	27.5	MKP4D044706D00_____	15	26	31.5	27.5	MKP4F044706F00_____
6.8 "	15	26	31.5	27.5	MKP4D046806F00_____	17	29	31.5	27.5	MKP4F046806G00_____
	13	24	41.5	37.5	MKP4D046807C00_____	15	26	41.5	37.5	MKP4F046807D00_____
10 μ F	17	29	41.5	37.5	MKP4D051007E00_____	19	32	41.5	37.5	MKP4F051007F00_____

* AC voltages: $f \leq 400$ Hz; $1.4 \times U_{rms} + U_{DC} \leq U_r$

** PCM = Printed circuit module = pin spacing

The high values and large box sizes according to main catalogue 2015 are still available on request.

Dims. in mm.

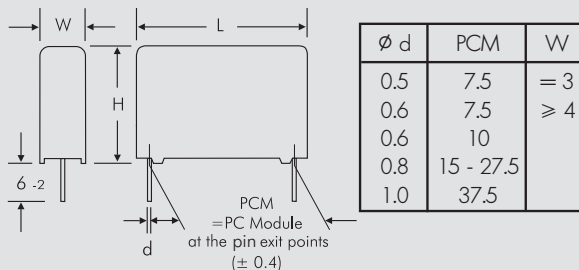

Part number completion:	
Tolerance:	20 % = M 10 % = K 5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 148.	

Rights reserved to amend design data without prior notification.

Continuation page 61

Continuation


General Data

Capacitance	400 VDC/220 VAC*					630 VDC/280 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μ F	3	8.5	10	7.5	MKP4G021002B00_____	3	8.5	10	7.5	MKP4J021002B00_____
0.015 "	4	9	10	7.5	MKP4G021502C00_____	4	9	13	10	MKP4J021003C00_____
	4	9	13	10	MKP4G021503C00_____	4	9	13	10	MKP4J021502C00_____
0.022 "	4.5	9.5	10.3	7.5	MKP4G022202D00_____	4.5	9.5	10.3	7.5	MKP4J022202D00_____
	4	9	13	10	MKP4G022203C00_____	4	9	13	10	MKP4J022203C00_____
0.033 "	5	10.5	10.3	7.5	MKP4G023302E00_____	5	10.5	10.3	7.5	MKP4J023302E00_____
	4	9	13	10	MKP4G023303C00_____	4	9	13	10	MKP4J023303C00_____
0.047 "	5	10.5	10.3	7.5	MKP4G024702E00_____	5.7	12.5	10.3	7.5	MKP4J024702F00_____
	5	11	13	10	MKP4G024703F00_____	5	11	13	10	MKP4J024703F00_____
0.068 "	5.7	12.5	10.3	7.5	MKP4G026802F00_____	6	12	13	10	MKP4J026803G00_____
	5	11	13	10	MKP4G026803F00_____	6	12.5	18	15	MKP4J026804C00_____
0.1 μ F	6	12	13	10	MKP4G031003G00_____	7	14	18	15	MKP4J031004D00_____
	5	11	18	15	MKP4G031004B00_____					
0.15 "	6	12.5	18	15	MKP4G031504C00_____	8	15	18	15	MKP4J031504F00_____
						6	15	26.5	22.5	MKP4J031505B00_____
0.22 "	7	14	18	15	MKP4G032204D00_____	9	16	18	15	MKP4J032204J00_____
						7	16.5	26.5	22.5	MKP4J032205D00_____
0.33 "	8	15	18	15	MKP4G033304F00_____	8.5	18.5	26.5	22.5	MKP4J033305F00_____
	6	15	26.5	22.5	MKP4G033305B00_____					
0.47 "	7	16.5	26.5	22.5	MKP4G034705D00_____	10.5	19	26.5	22.5	MKP4J034705G00_____
						11	21	31.5	27.5	MKP4J034706B00_____
0.68 "	8.5	18.5	26.5	22.5	MKP4G036805F00_____	11	21	31.5	27.5	MKP4J036806B00_____
1.0 μ F	11	21	26.5	22.5	MKP4G041005I00_____	13	24	31.5	27.5	MKP4J041006D00_____
	11	21	31.5	27.5	MKP4G041006B00_____					
1.5 "	11	21	31.5	27.5	MKP4G041506B00_____	15	26	31.5	27.5	MKP4J041506F00_____
2.2 "	15	26	31.5	27.5	MKP4G042206F00_____	17	29	41.5	37.5	MKP4J042207E00_____
3.3 "	17	29	31.5	27.5	MKP4G043306G00_____	19	32	41.5	37.5	MKP4J043307F00_____
	17	29	41.5	37.5	MKP4G043307E00_____					
4.7 "	19	32	41.5	37.5	MKP4G044707F00_____	20	39.5	41.5	37.5	MKP4J044707G00_____
6.8 "	20	39.5	41.5	37.5	MKP4G046807G00_____	24	45.5	41.5	37.5	MKP4J046807H00_____
10 μ F	24	45.5	41.5	37.5	MKP4G051007H00_____	35	50	41.5	37.5	MKP4J051007J00_____

* AC voltages: $f \leq 400$ Hz; $1.4 \times U_{rms} + U_{DC} \leq U_r$

** PCM = Printed circuit module = pin spacing

The high values and large box sizes according to main catalogue 2015 are still available on request.

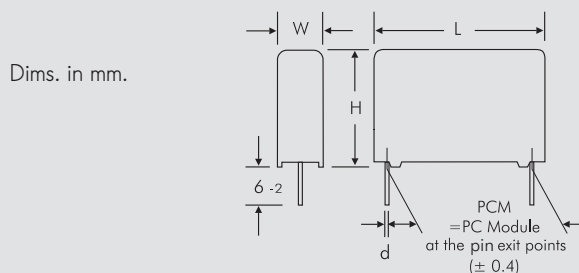

ϕ d	PCM	W
0.5	7.5	= 3
0.6	7.5	≥ 4
0.6	10	
0.8	15 - 27.5	
1.0	37.5	

Part number completion:

Tolerance: 20 % = M
10 % = K
5 % = J

Packing: bulk = S
Pin length: 6-2 = SD

Taped version see page 148.

Rights reserved to amend design data without prior notification.

Continuation page 62

Continuation

General Data

Capacitance	850 VDC/400 VAC*					1000 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	13	10	MKP4M011003C00_____	4	9	13	10	MKP4O111003C00_____
1500 "	4	9	13	10	MKP4M011503C00_____	4	9	13	10	MKP4O111503C00_____
2200 "	4	9	13	10	MKP4M012203C00_____	4	9	13	10	MKP4O112203C00_____
3300 "	4	9	13	10	MKP4M013303C00_____	4	9	13	10	MKP4O113303C00_____
4700 "	4	9	13	10	MKP4M014703C00_____	4	9	13	10	MKP4O114703C00_____
6800 "	4	9	13	10	MKP4M016803C00_____	5	11	13	10	MKP4O116803F00_____
0.01 µF	5	11	13	10	MKP4M021003F00_____	5	11	13	10	MKP4O121003F00_____
0.015 "	5	11	13	10	MKP4M021503F00_____	5	11	13	10	MKP4O121503F00_____
	5	11	18	15	MKP4M021504B00_____	5	11	18	15	MKP4O121504B00_____
0.022 "	5	11	18	15	MKP4M022204B00_____	5	11	18	15	MKP4O122204B00_____
0.033 "	6	12.5	18	15	MKP4M023304C00_____	6	12.5	18	15	MKP4O123304C00_____
0.047 "	7	14	18	15	MKP4M024704D00_____	7	14	18	15	MKP4O124704D00_____
0.068 "	8	15	18	15	MKP4M026804F00_____	8	15	18	15	MKP4O126804F00_____
	6	15	26.5	22.5	MKP4M026805B00_____	6	15	26.5	22.5	MKP4O126805B00_____
0.1 µF	9	16	18	15	MKP4M031004J00_____	9	16	18	15	MKP4O131004J00_____
	7	16.5	26.5	22.5	MKP4M031005D00_____	7	16.5	26.5	22.5	MKP4O131005D00_____
0.15 "	8.5	18.5	26.5	22.5	MKP4M031505F00_____	8.5	18.5	26.5	22.5	MKP4O131505F00_____
0.22 "	11	21	26.5	22.5	MKP4M032205I00_____	11	21	26.5	22.5	MKP4O132205I00_____
	11	21	31.5	27.5	MKP4M032206B00_____	11	21	31.5	27.5	MKP4O132206B00_____
0.33 "	11	21	31.5	27.5	MKP4M033306B00_____	11	21	31.5	27.5	MKP4O133306B00_____
0.47 "	13	24	31.5	27.5	MKP4M034706D00_____	13	24	31.5	27.5	MKP4O134706D00_____
0.68 "	17	29	31.5	27.5	MKP4M036806G00_____	17	29	31.5	27.5	MKP4O136806G00_____
1.0 µF	17	29	41.5	37.5	MKP4M041007E00_____	17	29	41.5	37.5	MKP4O141007E00_____
1.5 "	20	39.5	41.5	37.5	MKP4M041507G00_____	20	39.5	41.5	37.5	MKP4O141507G00_____
2.2 "	24	45.5	41.5	37.5	MKP4M042207H00_____	24	45.5	41.5	37.5	MKP4O142207H00_____
3.3 "	31	46	41.5	37.5	MKP4M043307I00_____	31	46	41.5	37.5	MKP4O143307I00_____
4.7 "	35	50	41.5	37.5	MKP4M044707J00_____	35	50	41.5	37.5	MKP4O144707J00_____


* AC voltages: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

■ New values and range

** PCM = Printed circuit module = pin spacing

The high values and large box sizes according to main catalogue 2015 are still available on request.

Dims. in mm.

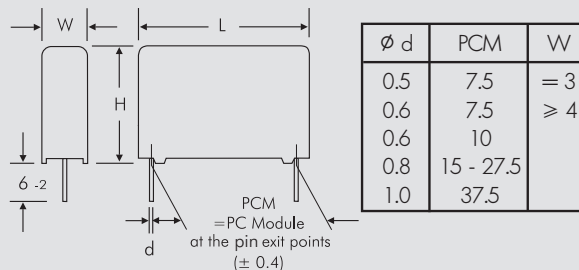

Part number completion:

Tolerance: 20 % = M
10 % = K
5 % = J

Packing: bulk = S

Pin length: 6-2 = SD

Taped version see page 148.

Rights reserved to amend design data without prior notification.

Continuation page 63

Continuation

General Data


Capacitance	1600 VDC/630 VAC*					2000 VDC/700 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	13	10	MKP4T011003C00_	4	9	13	10	MKP4U011003C00_
1500 "	4	9	13	10	MKP4T011503C00_	4	9	13	10	MKP4U011503C00_
2200 "	4	9	13	10	MKP4T012203C00_	4	9	13	10	MKP4U012203C00_
3300 "	4	9	13	10	MKP4T013303C00_	4	9	13	10	MKP4U013303C00_
4700 "	4	9	13	10	MKP4T014703C00_	4	9	13	10	MKP4U014703C00_
6800 "	5	11	13	10	MKP4T016803F00_	5	11	13	10	MKP4U016803F00_
						5	11	18	15	MKP4U016804B00_
0.01 μF	5	11	13	10	MKP4T021003F00_	6	12.5	18	15	MKP4U021004C00_
0.015 "	5	11	18	15	MKP4T021504B00_	7	14	18	15	MKP4U021504D00_
0.022 "	6	12.5	18	15	MKP4T022204C00_	8	15	18	15	MKP4U022204F00_
0.033 "	7	14	18	15	MKP4T023304D00_	9	16	18	15	MKP4U023304J00_
	6	15	26.5	22.5	MKP4T023305B00_	6	15	26.5	22.5	MKP4U023305B00_
0.047 "	9	16	18	15	MKP4T024704J00_	7	16.5	26.5	22.5	MKP4U024705D00_
	6	15	26.5	22.5	MKP4T024705B00_					
0.068 "	7	16.5	26.5	22.5	MKP4T026805D00_	8.5	18.5	26.5	22.5	MKP4U026805F00_
0.1 μF	8.5	18.5	26.5	22.5	MKP4T031005F00_	11	21	26.5	22.5	MKP4U031005I00_

* AC voltages: $f \leq 400$ Hz; $1.4 \times U_{rms} + UDC \leq U_r$

■ New ranges

** PCM = Printed circuit module = pin spacing

Dims in mm



∅ d	PCM	W
0.5	7.5	= 3
0.6	7.5	≥ 4
0.6	10	
0.8	15 - 27.5	
1.0	37.5	

Part number completion:

Tolerance: 20 % = M

10 % = K

5 % = J






Packing: bulk = S

Pin length: 6-2 = SD

Taped version see page 148.

Rights reserved to amend design data without prior notification.

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

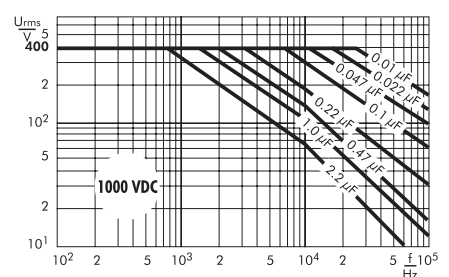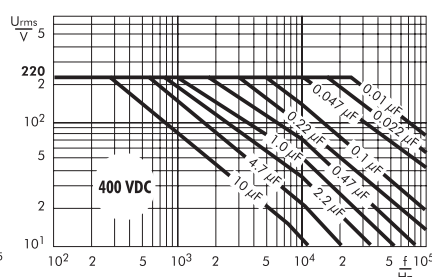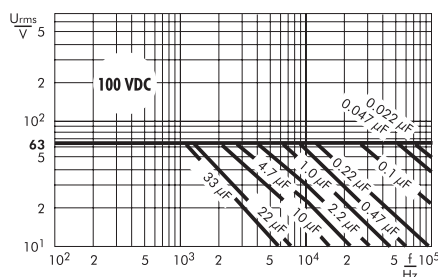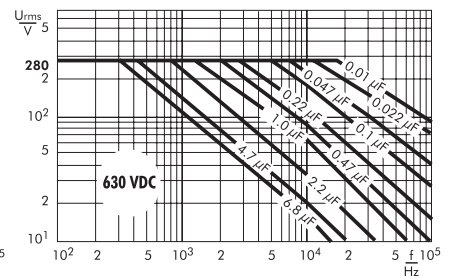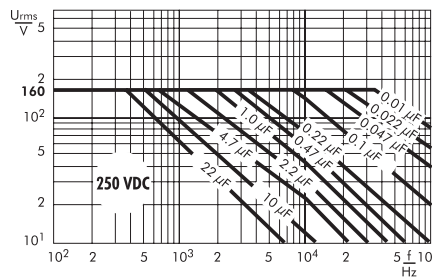

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{max.} \leq 125^{\circ}C$
soldering: $T_{max.} \leq 135^{\circ}C$

Polypropylene: preheating: $T_{max.} \leq 100^{\circ}C$
soldering: $T_{max.} \leq 110^{\circ}C$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}C$


Dwell time: $t < 5 \text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}C$

Dwell time: $\Sigma t < 5 \text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

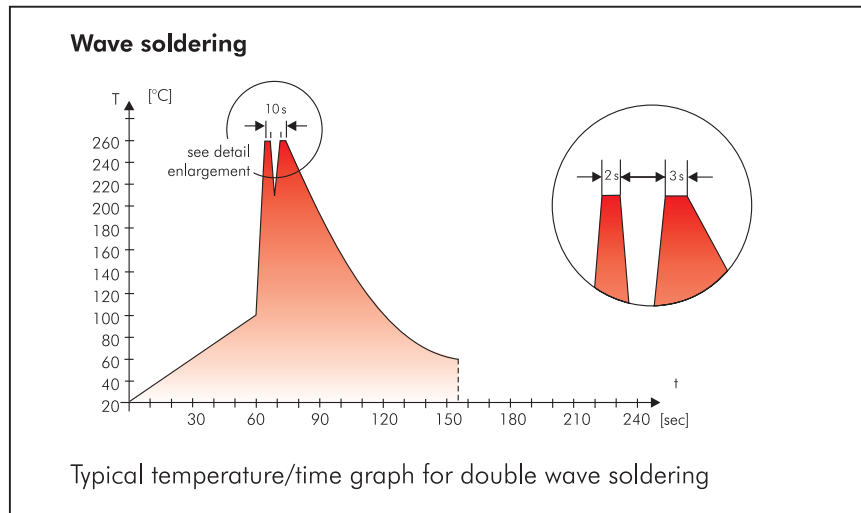

WIMA Quality and Environmental Philosophy

ISO 9001:2008 Certification

ISO 9001:2008 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2008 of our factories by the infaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

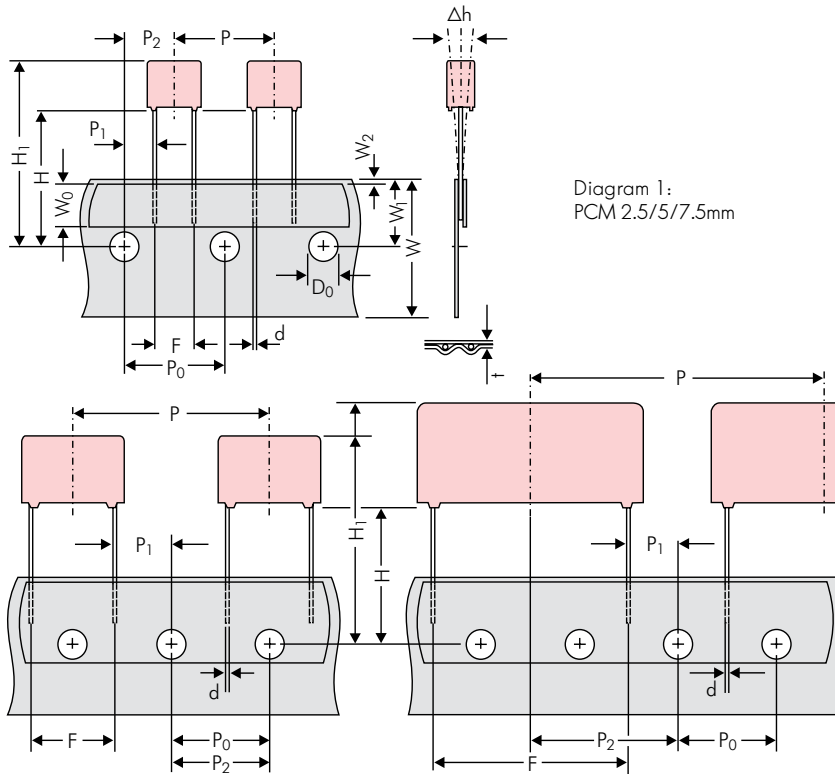


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 tapping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping									
		PCM 2.5 tapping	PCM 5 tapping	PCM 7.5 tapping	PCM 10 tapping*	PCM 15 tapping*	PCM 22.5 tapping	PCM 27.5 tapping			
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5			
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape			
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5			
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.			
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2			
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5			
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch			
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7			
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3			
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5			
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0			
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8			
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}			
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.			
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2			
Package (see also page 149)	ROLL/AMMO				AMMO						
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2	depending on comp. dimensions		REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2 or 66 ±2	REEL	φ 500 max. φ 25 ±1	B 60 ±2 68 ±2
Unit	see details page 150.										

Dims in mm.

* Diameter of pins see General Data.


* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 1). P₀ = 12.7 or 15.0 is possible


Please clarify customer-specific deviations with the manufacturer.

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

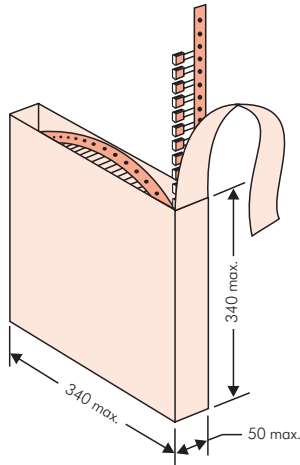

■ AMMO Packaging

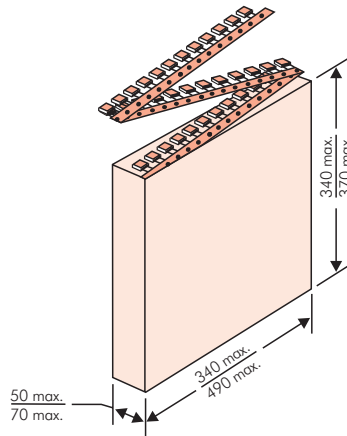

■ REEL Packaging

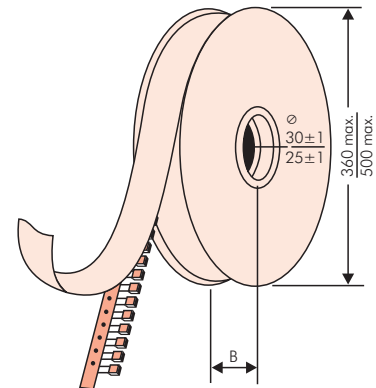

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

WIMA Best Capacitors Made in Germany		Werk Unna	
Supplier-ID: 123456789	RoHS 2011/65/EU	Date Code: 08.10.10	
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000	
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002	
		Gross Weight [g]: 1870	
WIMA Confirmation No.: 0001004053000100	WIMA Part No.: MKS2C034701C00K88D		
Handling Unit: MKS 2	QTY: 5.000	COO: DE	
	MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RMS		
1000067326	Standard 10% Loss - Standard	Drühte 6-2	Week 03/2011
	Vorlage Debitor Inland		

BARCODE „Code 39“



Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing unit								
						ROLL		REEL				AMMO		
	W	H	L	Codes		S	H16.5	H18.5	ø 360	ø 500	340 × 340	490 × 370		
					N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000		2200	2500				2800		
	3	7.5	4.6	0C	5000		2000	2300				2300		
	3.8	8.5	4.6	0D	5000		1500	1800				1800		
	4.6	9	4.6	0E	5000		1200	1500				1500		
	5.5	10	4.6	0F	5000		900	1200				1200		
5 mm	2.5	6.5	7.2	1A	5000		2200	2500				2800		
	3	7.5	7.2	1B	5000		2000	2300				2300		
	3.5	8.5	7.2	1C	5000		1600	2000				2000		
	4.5	6	7.2	1D	6000		1300	1500				1500		
	4.5	9.5	7.2	1E	4000		1300	1500				1500		
	5	10	7.2	1F	3500		1100	1400				1400		
	5.5	7	7.2	1G	4000		1000	1200				1200		
	5.5	11.5	7.2	1H	2500		1000	1200				1200		
	6.5	8	7.2	1I	2500		800	1000				1000		
	7.2	8.5	7.2	1J	2500		700	1000				1000		
	7.2	13	7.2	1K	2000		700	950				1000		
	8.5	10	7.2	1L	2000		600	800				800		
	8.5	14	7.2	1M	1500		600	800				800		
11	16	7.2	1N	1000		500	600				400			
7.5 mm	2.5	7	10	2A	5000			2500	4400		2500			
	3	8.5	10	2B	5000			2200	4300		2300		4150	
	4	9	10	2C	4000			1700	3200		1700		3100	
	4.5	9.5	10.3	2D	3500			1500	2900		1400		2700	
	5	10.5	10.3	2E	3000			1300	2500		1300			
	5.7	12.5	10.3	2F	2000			1000	2200		1100			
	7.2	12.5	10.3	2G	1500			900	1800		1000			
10 mm	3	9	13	3A	3000			1100	2200				1900	
	4	8.5	13.5	FA	3000			900	1600				1450	
	4	9	13	3C	3000			900	1600				1450	
	4	9.5	13	3D	3000			900	1600				1400	
	5	10	13.5	FB	2000			700	1300				1200	
	5	11	13	3F	3000			700	1300				1200	
	6	12	13	3G	2400			550	1100				1000	
	6	12.5	13	3H	2400			550	1100				1000	
8	12	13	3I	2000			400	800				740		
15 mm	5	11	18	4B	2400			600	1200				1150	
	5	13	19	FC	1000			600	1200				1200	
	6	12.5	18	4C	2000			500	1000				1000	
	6	14	19	FD	1000			500	1000				1000	
	7	14	18	4D	1600			450	900				850	
	7	15	19	FE	1000			450	900				850	
	8	15	18	4F	1200			400	800				740	
	8	17	19	FF	500			400	800				740	
	9	14	18	4H	1200			350	700				650	
	9	16	18	4J	900			350	700				650	
	10	18	19	FG	500			300	650				590	
11	14	18	4M	1000			300	600				540		
22.5 mm	5	14	26.5	5A	1200				800				770	
	6	15	26.5	5B	1000				700				640	
	7	16.5	26.5	5D	760				600				550	
	8	20	28	FH	500				500				480	
	8.5	18.5	26.5	5F	500				480				450	
	10	22	28	FI	570*				420				380	
	10.5	19	26.5	5G	594*				400				360	
	10.5	20.5	26.5	5H	594*				400				360	
	11	21	26.5	5I	561*				380				350	
	12	24	28	FJ	480*				350				310	

* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	W	H	L	Codes		S	H16.5	H18.5	ø 360		ø 500		340 x 340		490 x 370
					N	O	F	I	H	J	A	C	B	D	
27.5 mm	9	19	31.5	6A	567*	–	–	–	–	460/340*	–	–	420		
	11	21	31.5	6B	459*	–	–	–	–	380/280*	–	–	350		
	13	24	31.5	6D	378*	–	–	–	–	300	–	–	290		
	13	25	33	FK	405*	–	–	–	–	–	–	–	–		
	15	26	31.5	6F	324*	–	–	–	–	270	–	–	250		
	15	26	33	FL	324*	–	–	–	–	–	–	–	–		
	17	29	31.5	6G	198*	–	–	–	–	–	–	–	–		
	17	34.5	31.5	6I	198*	–	–	–	–	–	–	–	–		
	20	32	33	FM	162*	–	–	–	–	–	–	–	–		
	20	39.5	31.5	6J	162*	–	–	–	–	–	–	–	–		
37.5 mm	9	19	41.5	7A	441*	–	–	–	–	–	–	–	–		
	11	22	41.5	7B	357*	–	–	–	–	–	–	–	–		
	13	24	41.5	7C	294*	–	–	–	–	–	–	–	–		
	15	26	41.5	7D	252*	–	–	–	–	–	–	–	–		
	17	29	41.5	7E	154*	–	–	–	–	–	–	–	–		
	19	32	41.5	7F	140*	–	–	–	–	–	–	–	–		
	20	39.5	41.5	7G	126*	–	–	–	–	–	–	–	–		
	24	45.5	41.5	7H	112*	–	–	–	–	–	–	–	–		
	31	46	41.5	7I	84*	–	–	–	–	–	–	–	–		
	35	50	41.5	7J	35*	–	–	–	–	–	–	–	–		
40	55	41.5	7K	28*	–	–	–	–	–	–	–	–			
48.5 mm	19	31	56	8D	120*	–	–	–	–	–	–	–	–		
	23	34	56	8E	80*	–	–	–	–	–	–	–	–		
	27	37.5	56	8H	84*	–	–	–	–	–	–	–	–		
	33	48	56	8J	25*	–	–	–	–	–	–	–	–		
	37	54	56	8L	25*	–	–	–	–	–	–	–	–		
52.5 mm	25	45	57	9D	70*	–	–	–	–	–	–	–	–		
	30	45	57	9E	60*	–	–	–	–	–	–	–	–		
	35	50	57	9F	25*	–	–	–	–	–	–	–	–		
	45	55	57	9H	20*	–	–	–	–	–	–	–	–		
	45	65	57	9J	20*	–	–	–	–	–	–	–	–		

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.

Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com



WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 μ F			2.5x6.5x7.2		-	20%	bulk	6-2			
Type description:				Rated voltage:		Capacitance:			Size:		Tolerance:			Packing:			
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022			4.8x3.3x3 Size 1812 = KA		±20% = M			AMMO H16.5 340x340 = A			
SMD-PEN = SMDN				63 VDC = C0		47 pF = 0047			4.8x3.3x4 Size 1812 = KB		±10% = K						
SMD-PPS = SMDI				100 VDC = D0		100 pF = 0100			5.7x5.1x3.5 Size 2220 = QA		±5% = J			AMMO H16.5 490x370 = B			
FKP 02 = FKPO				250 VDC = F0		150 pF = 0150			5.7x5.1x4.5 Size 2220 = QB		±2.5% = H			AMMO H18.5 340x340 = C			
MKS 02 = MKS0				400 VDC = G0		220 pF = 0220			7.2x6.1x3 Size 2824 = TA		±1% = E			AMMO H18.5 490x370 = D			
FKS 2 = FKS2				450 VDC = H0		330 pF = 0330			7.2x6.1x5 Size 2824 = TB		...			REEL H16.5 360 = F			
FKP 2 = FKP2				520 VDC = H2		470 pF = 0470			10.2x7.6x5 Size 4030 = VA		REEL H16.5 500 = H			REEL H18.5 360 = I			
FKS 3 = FKS3				600 VDC = I0		680 pF = 0680			12.7x10.2x6 Size 5040 = XA								
FKP 3 = FKP 3				630 VDC = J0		1000 pF = 1100			15.3x13.7x7 Size 6054 = YA		ROLL H16.5 = N			REEL H18.5 500 = J			
MKS 2 = MKS2				700 VDC = K0		1500 pF = 1150			2.5x7x4.6 PCM 2.5 = 0B								
MKP 2 = MKP2				800 VDC = L0		2200 pF = 1220			3x7.5x4.6 PCM 2.5 = 0C		ROLL H18.5 = O			BLISTER W12 180 = P			
MKS 4 = MKS4				850 VDC = M0		3300 pF = 1330			2.5x6.5x7.2 PCM 5 = 1A								
MKP 4C = MKPC				900 VDC = N0		4700 pF = 1470			3x7.5x7.2 PCM 5 = 1B		BLISTER W16 330 = R			BLISTER W24 330 = T			
MKP 4 = MKP4				1000 VDC = O1		6800 pF = 1680			2.5x7x10 PCM 7.5 = 2A								
MKP 10 = MKP1				1100 VDC = P0		0.01 μ F = 2100			3x8.5x10 PCM 7.5 = 2B		Bulk/TPS Standard = S			...			
FKP 1 = FKP1				1200 VDC = Q0		0.022 μ F = 2220			3x9x13 PCM 10 = 3A								
MKP-X2 = MKX2				1250 VDC = R0		0.047 μ F = 2470			4x9x13 PCM 10 = 3C		...			Pin length (untaped)			
MKP-X1 R = MKX1				1500 VDC = S0		0.1 μ F = 3100			5x11x18 PCM 15 = 4B								
MKP-Y2 = MKY2				1600 VDC = T0		0.22 μ F = 3220			6x12.5x18 PCM 15 = 4C		3.5 ±0.5 = C9			6-2 = SD			
MP 3-X2 = MPX2				2000 VDC = U0		0.47 μ F = 3470			5x14x26.5 PCM 22.5 = 5A		16 ±1 = P1			Pin length (taped)			
MP 3-X1 = MPX1				2500 VDC = V0		1 μ F = 4100			6x15x26.5 PCM 22.5 = 5B		none = 00			...			
MP 3-Y2 = MPY2				3000 VDC = W0		2.2 μ F = 4220			9x19x31.5 PCM 27.5 = 6A		...						
MP 3R-Y2 = MPRY				4000 VDC = X0		4.7 μ F = 4470			11x21x31.5 PCM 27.5 = 6B								
MKP 4F = MKPF				6000 VDC = Y0		10 μ F = 5100			9x19x41.5 PCM 37.5 = 7A								
Snubber MKP = SNMP				250 VAC = 0W		22 μ F = 5220			11x22x41.5 PCM 37.5 = 7B								
Snubber FKP = SNFP				275 VAC = 1W		47 μ F = 5470			19x31x56 PCM 48.5 = 8D								
GTO MKP = GTOM				300 VAC = 2W		100 μ F = 6100			25x45x57 PCM 52.5 = 9D								
DC-LINK MKP 3 = DCP3				305 VAC = AW		220 μ F = 6220			...								
DC-LINK MKP 4 = DCP4				350 VAC = BW		1000 μ F = 7100			...								
DC-LINK MKP 4S = DCP5				440 VAC = 4W		1500 μ F = 7150			...								
DC-LINK MKP 5 = DCP5				500 VAC = 5W									
DC-LINK MKP 6 = DCP6											
DC-LINK HC = DCHC											
DC-LINK HY = DCHY											

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

WIMA:

[MKP4-1/250/10P22](#) [MKP4-1.0/250/10](#) [MKP4-.68/250/10](#) [MKP4J031004D00MSSD](#) [MKP4F034704D00KSSD](#)
[MKP4G044707F00KYSD](#) [MKP4G024703C00JSSD](#) [MKP4G041005I00KSSD](#) [MKP4G042206F00KYSD](#)
[MKP4F032203G00JSSD](#) [MKP4F033304C00JSSD](#) [MKP4F034704D00JSSD](#) [MKP4F026803C00JSSD](#)
[MKP4J022202D00JSSD](#) [MKP4J041506F00JYSD](#) [MKP4J031004D00KSSD](#) [MKP4F051007F00KYSD](#)
[MKP4J041006D00KYSD](#) [MKP4F024702C00KSSD](#) [MKP4F031003C00JSSD](#) [MKP4F022202B00JSSD](#)
[MKP4F031002D00KSSD](#) [MKP4F044706F00KYSD](#) [MKP4J031004D00JSSD](#) [MKP4O136806G00KYSD](#)
[MKP4G041506B00KYSD](#) [MKP4F041005D00JSSD](#) [MKP4G023302D00KSSD](#) [MKP4G024702E00KSSD](#)
[MKP4G026802F00KSSD](#) [MKP4G022202C00KSSD](#) [MKP4J021502C00KSSD](#) [MKP4F032203G00KSSD](#)
[MKP4J021002B00KSSD](#) [MKP4F031502E00KSSD](#) [MKP4F033304C00KSSD](#) [MKP4F036805B00KSSD](#)
[MKP4F032204B00KSSD](#) [MKP4G024703C00KSSD](#) [MKP4J021003C00KSSD](#) [MKP4F031003C00KSSD](#)
[MKP4F031503F00KSSD](#) [MKP4J021503C00KSSD](#) [MKP4G022203C00KSSD](#) [MKP4G023303C00KSSD](#)
[MKP4G026803F00KSSD](#) [MKP4O124704D00KSSD](#) [MKP4O142207H00KYSD](#) [MKP4F026803C00KF00](#) [MKP4-](#)
[.33/630/10P22](#) [MKP4-.033/630/10P10](#) [MKP4O141507G00JSSD](#) [MKP4G041506B00KSSD](#) [MKP4-.47/630/5P22](#)
[MKP4O122204B00KSSD](#) [MKP4-.22/400/10P15](#) [MKP4J041006D00KSSD](#) [MKP4G042206F00KSSD](#)
[MKP4J034705G00KYSD](#) [MKP4G044707F00MSSD](#) [MKP4G033304F00JD00](#) [MKP4F046807D00JYSD](#)
[MKP4F046807D00JSSD](#) [MKP4F031502E00JSSD](#) [MKP4-4.7/630/10P37](#) [MKP4.01/630/10P7L3.5](#) [MKP4-.1/250/10P10](#)
[MKP4-.1/250/10P7](#) [MKP4G032204D00KSSD](#) [MKP4O141007E00KSSD](#) [MKP4F036805B00JSSD](#)
[MKP4F041505G00JSSD](#) [MKP4O132206B00JSSD](#) [MKP4-4.7/400/20P37](#) [MKP4-.047/400/10P10](#) [MKP4-22/100/10P37](#)
[MKP4-.22/1KV/5P27](#) [MKP4O141007E00KYSD](#) [MKP4-.01/630/10P7T](#) [MKP4-.1/1KV/10P15](#) [MKP4-1.5/630/10P27](#)
[MKP4-.1/630/5P15](#) [MKP4-.68/630/5P27](#) [MKP4F024703C00KSSD](#) [MKP4-.15/400/10P15](#) [MKP4-.047/400/5P10](#)
[MKP4-2.2/400/10P27](#) [MKP4G036805F00JSSD](#) [MKP4F042205I00JYSD](#) [MKP4G041506B00JSSD](#)
[MKP4F042206B00JSSD](#) [MKP4F051007F00KSSD](#) [MKP4O136806G00KSSD](#) [MKP4J034705G00JYSD](#)
[MKP4F031002D00JSSD](#) [MKP4F043306D00JSSD](#) [MKP4J042207E00KSSD](#) [MKP4G032204D00KD00](#)
[MKP4G036805F00KD00](#) [MKP4-2.2/1KV/10P37](#)