


SECTION A-A

**Electric Specifications**  
 Current Rating:1.1Amps  
 Rating Voltage: 250V AC  
 Insulation Resistance:100M Ohm Min At DC 500V  
 Contact Resistance:30m Ohm Max At DC 100m Amps  
 Withstanding Voltage:1 Minute At 750V r.m.s Min  
 Temperature Range:-40°C~85°C  
**Materials:**  
 Insulator:High Temp. Plastic (Nylon 66 UL94V-V0)  
 Insulator Color:Black  
 Terminal :Copper Alloy  
 Plating:Selective Gold Plated  
 Fork:Spcc Nickel Plated

**How To Order**  
 PCIECP10-36GX-PG-X4  
 PG:With Post  
 Blank :Selective Gold 1u"  
 G3 :Selective Gold 3u"  
 G5 :Selective Gold 1u"  
 G15 :Selective Gold 15u"  
 No.of Positions  
 Clamping Plated Type

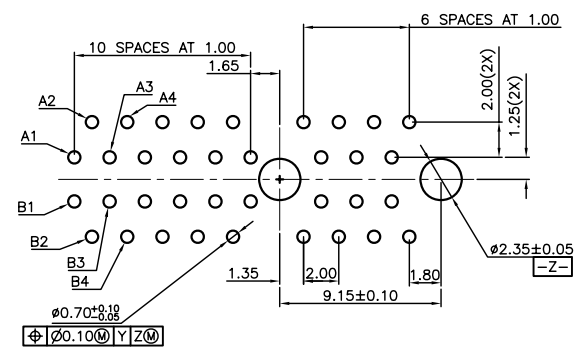

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)  
 Tolerance Unless: ±0.05

RoHS Compliant

E				DRAWN: WGL	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: PCI-E 36P Straigh Dip type (导柱式X4兼容)	SIZE A4
D				CHECKED: Jeremy Liu	UNIT: MM SCALE:2:1			
C				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: PCIEV10-36GX-PG-X4		
B					PROJECTION:			
A	19-Aug-2020	(PC0001)	WGL					
REV	DATE	FILE	BY					