

2. 54mm (0. 100") FEMALE HEADER, SINGLE ROW, STRAIGHT H=3. 5mm

SPECIFICATIONS





Current Rating: 3AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 1000V AC/minute
 Operation Temperature: -40℃to+105℃
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: Pa6T+30 % G. F

Ordering Information

2135-1 XX S XX X YN01

No. of Pins per Row: 02-40
 Contact Plating:
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

Insulator Material:
 A=PBT
 B=Nylon-66
 C=Nylon-6T

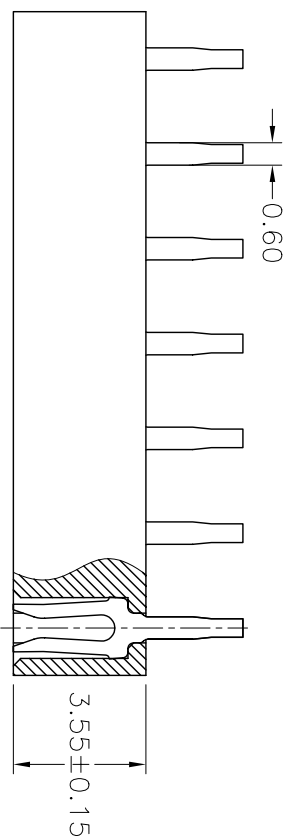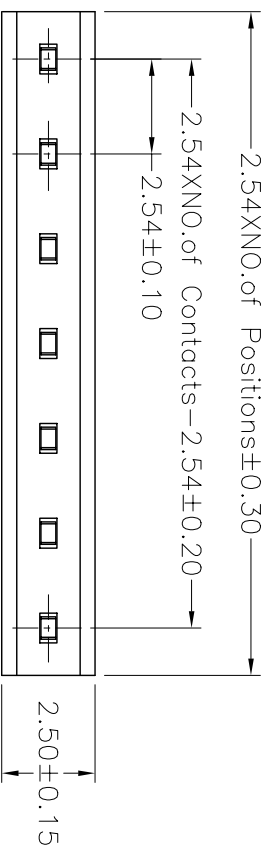

Recommended PCB Board Hole Layout

公差 (TOLERANCE)		绘图 (DRAWN)		杨启晓		投影 (PROJECT)		料号 (PART NO)		2135-1XXSXXYYN01		发行编号 (Issue No)	
X.	± 5°	X.				MM	MM						
. X	± 2°	. X	± 0.38	校对 (CHECKED)		4:1	4:1						
. XX	± 1°	. XX	± 0.25	核准 (APPROVE)		AO	AO						1/1
. XXX	± 0.5°	. XXX	± 0.12			日期 (DATE)	05-07-30	品名 (NAME)	2. 54单排母 180度 H=3. 5mm				

ZYSZ INDUSTRY CO., LTD

REVISION DATA

ITEM	DESCRIPTION	DATE	REMARK