

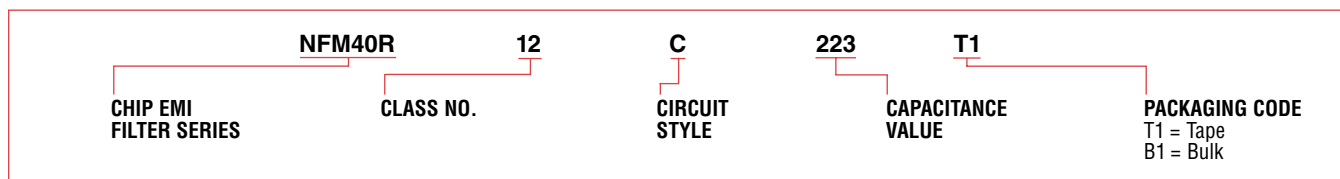


The NFM39/40/41R Series is a miniature chip type EMI Suppression filter based on feed-thru design. It is well suited for EMI suppression in digital circuit boards or in I/O lines of digital equipment where high density mounting is used.

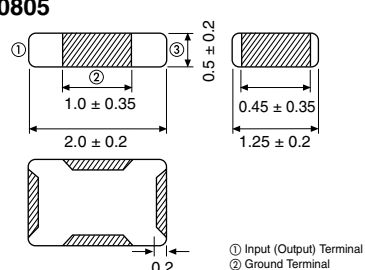
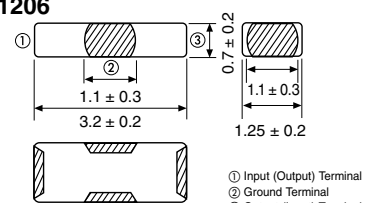
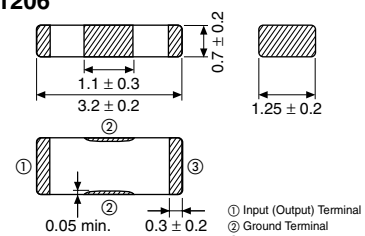
FEATURES

- Miniature size—2.0mm x 1.25mm x 0.5mm
- Nickel barrier for solder heat resistance
- Wide frequency range of operation – to several hundred MHz
- Tape and reel for auto-placement

PART NUMBERING SYSTEM

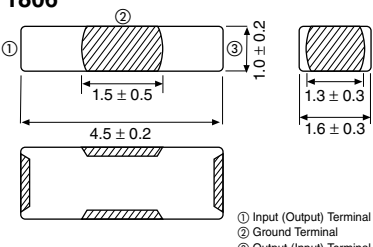
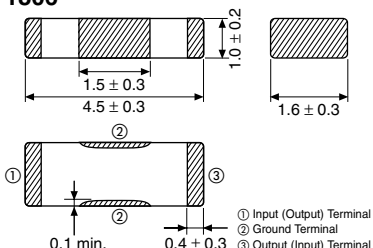


SPECIFICATIONS

Dimensions: mm	Part Number	Capacitance	Rated Voltage	Rated Current (mA)	Insulation Resistance (Ohms min.)	DCR (Ohms max.)	Operating Temp. Range	Previous Part Number
0805  <p>① Input (Output) Terminal ② Ground Terminal ③ Output (Input) Terminal</p>	★NFM39R02C220	22pF ± 20%	50VDC	300	1000M	0.6	-55°C ~ +125°C	—
	★NFM39R02C470	47pF ± 20%						
	★NFM39R02C101	100pF ± 20%						
	★NFM39R12C221	220pF ± 20%						
	★NFM39R12C471	470pF ± 20%						
	★NFM39R12C102	1000pF ± 20%						
	★NFM39R12C222	2200pF ± 20%						
★NFM39R12C223	22000pF ± 20%							
1206  <p>① Input (Output) Terminal ② Ground Terminal ③ Output (Input) Terminal</p>	★NFM40R02C220	22pF ± 50%	25VDC	300	1000M	0.6	-55°C ~ +125°C	—
	★NFM40R02C470	47pF ± 50%						
	★NFM40R02C101	100pF ± 50%						
1206  <p>① Input (Output) Terminal ② Ground Terminal ③ Output (Input) Terminal</p>	NFM3212R13C221R	220pF ± 50%	50VDC	300	1000M	0.30	-55°C ~ +125°C	NFM40R12C221
	NFM3212R13C471R	470pF ± 50%						NFM40R12C471
	NFM3212R13C102R	1000pF ± 50%						NFM40R12C102
	NFM3212R13C222R	2200pF ± 50%						NFM40R12C222
	NFM3212R13C223R	22000pF ± 50%						NFM40R12C223

*Available as standard through authorized Murata Electronics Distributors.

SPECIFICATIONS

Dimensions: mm	Part Number	Capacitance	Rated Voltage	Rated Current (mA)	Insulation Resistance (Ohms min.)	DCR (Ohms max.)	Operating Temp. Range	Previous Part Number
1806  <p>① Input (Output) Terminal ② Ground Terminal ③ Output (Input) Terminal</p>	★NFM41R02C220	22pF ± 50%	100VDC	300	10000M	0.3	-55°C ~ +125°C	—
	★NFM41R02C470	47pF ± 50%						
	★NFM41R02C101	100pF ± 50%						
	★NFM41R02C221	220pF ± 50%						
1806  <p>① Input (Output) Terminal ② Ground Terminal ③ Output (Input) Terminal</p>	NFM4516R13C471R	470pF ± 50%	100VDC	300	10000M	0.3	-55°C ~ +125°C	NFM41R12C471
	NFM4516R13C102R	1000pF ± 50%						NFM41R12C102
	NFM4516R13C222R	2200pF ± 50%						NFM41R12C222
	NFM4516R13C223R	22000pF ± 50%						NFM41R12C223

* Available as standard through authorized Murata Electronics Distributors.

TYPICAL INSERTION LOSS CHARACTERISTICS

