




(543) 型条形连接器

(543) Pressure Welding Bar Connector


间距 (Pitch) : 2.54mm (.100")

■ 技术参数 SPECIFICATIONS


- 线数 (Poles) : 2~24
- 适用线规 (Applicable wires) : 厚度0.3mm扁平电缆
- 适应基板厚度 (Applicable PC board thickness) : 0.8~1.6mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V.Ac/Dc
- 额定电流 (Current rating) : 2.5A
- 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 800V.Ac/1分钟 (Minute)
- 材料 (Material) :
 - 壳体 (Housing) : 尼龙 (Nylon) UL94V-0
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)

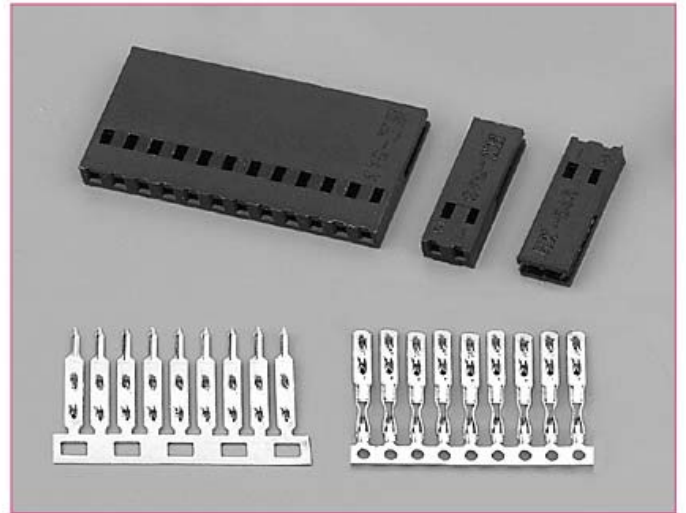


HX25406-PT (543)

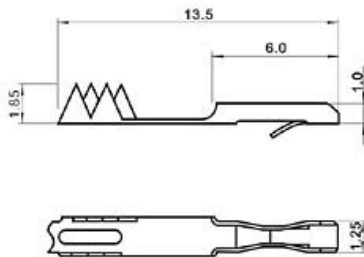


HX25407-RT (543)

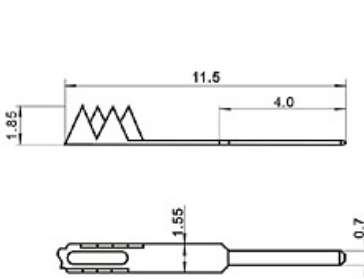


HX25406-Y (543)

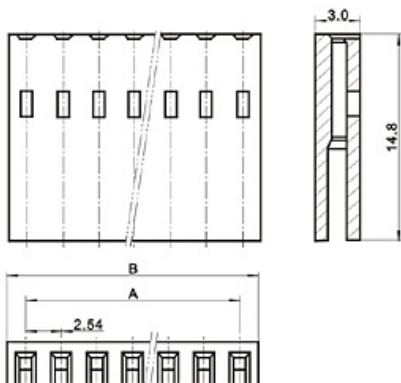

■ 安装尺寸 MOUNTING MEASUREMENT

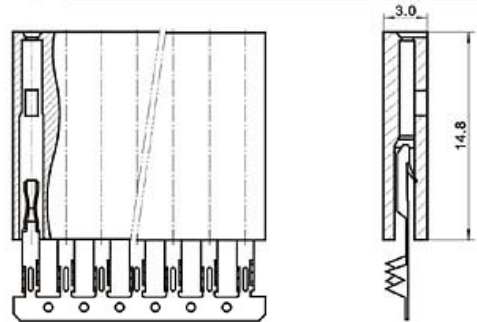

■ 适用扁平电缆 PROPER CABLE

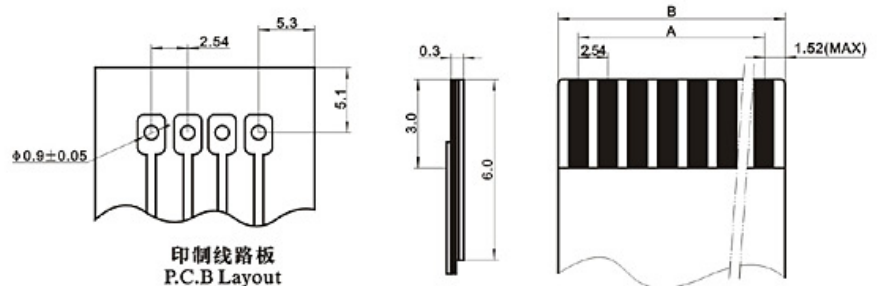

壳体 HOUSING (543)

线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
2	HX25406-2Y	2.54	5.08
3	HX25406-3Y	5.08	7.62
4	HX25406-4Y	7.62	10.16
5	HX25406-5Y	10.16	12.70
6	HX25406-6Y	12.70	15.24
7	HX25406-7Y	15.24	17.78
8	HX25406-8Y	17.78	20.32
9	HX25406-9Y	20.32	22.86
10	HX25406-10Y	22.86	25.40
11	HX25406-11Y	25.40	27.94
12	HX25406-12Y	27.94	30.48
13	HX25406-13Y	30.48	33.02

线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
14	HX25406-14Y	33.02	35.56
15	HX25406-15Y	35.56	38.10
16	HX25406-16Y	38.10	40.64
17	HX25406-17Y	40.64	43.18
18	HX25406-18Y	43.18	45.72
19	HX25406-19Y	45.72	48.26
20	HX25406-20Y	48.26	50.80
21	HX25406-21Y	50.80	53.34
22	HX25406-22Y	53.34	55.88
23	HX25406-23Y	55.88	58.42
24	HX25406-24Y	58.42	60.96