



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 04/27/05'		卢金春
B	图面绘制错误	LL 10/29/06'		卢金春
C	整理图面	YCH 04/24/08'		

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:


DS1011-01- X X X X X

- LOCK DIM.
  - 8: 8.60mm(standard latch)
  - 2: 4.20mm(short latch)
  - S: 4.2mm(special latch)
- HOUSING COLOR
  - B: BLACK
  - A: GRAY
- CONTACT PLATING
  - Ti: SELECTIVE GOLD FLASH
  - Si: FULL GOLD FLASH
- HOUSING TYPE
  - S: SMALL LATCH HOUSING
- MOUNTING TYPE
  - S: STRAIGHT
  - R: R/A
- No. OF CONTACTS
  - 10 14 16 20 26 30
  - 34 40 50 60 64

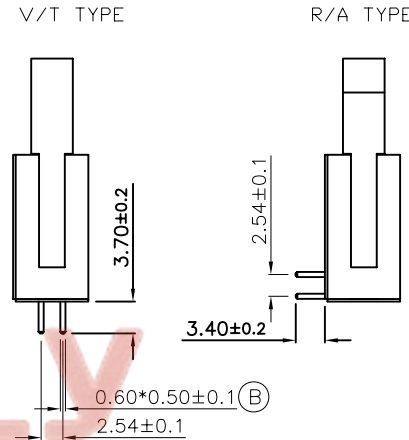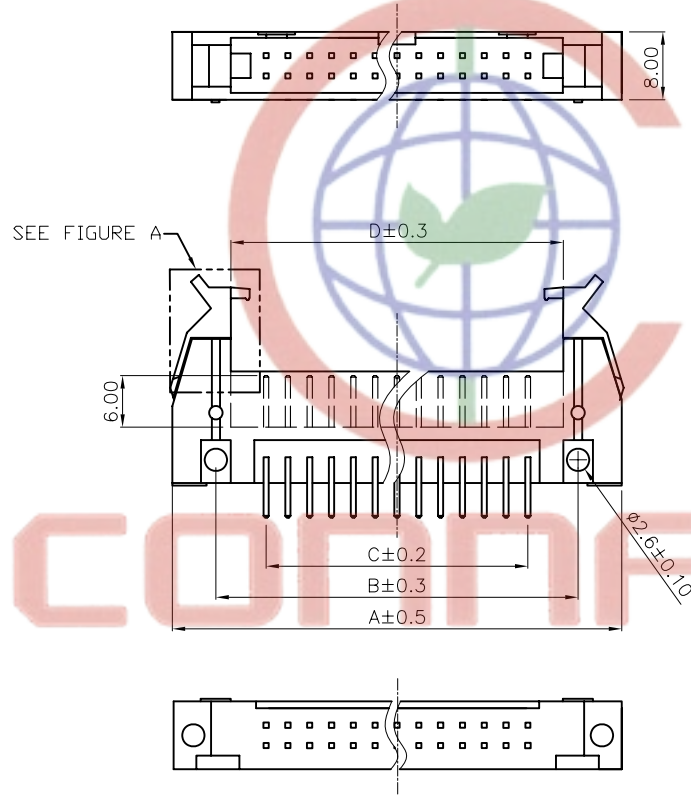

AVAILABLE DIMENSION TABLE

No. of Contacts	10	14	16	20	26	30	34	40	50	60	64
A	31.92	37.00	39.54	44.62	52.24	57.32	62.40	70.02	82.72	95.42	100.50
B	21.72	26.80	29.34	34.42	42.04	47.12	52.20	59.82	72.52	85.22	90.30
C	10.16	15.24	17.78	22.86	30.48	35.56	40.64	48.26	60.96	73.66	78.74
D	18.22	23.30	25.84	30.92	38.54	43.62	48.70	56.32	69.02	81.72	86.80

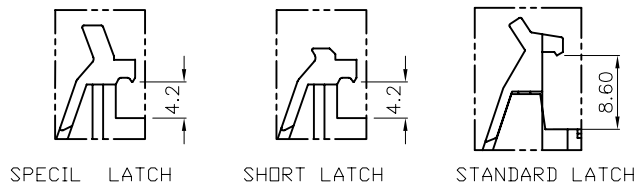

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SHOULDED HEADER PITCH 2.54mm
X.	±0.60	X.	±5°	UNITS	mm	SHEET	DS1011-01 SERIES
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1011-01-XXSXXX						

Tel:86-574-63508787

Fax:86-574-63510817

http://www.connfly.com.cn

Http://www.connfly.com

Address: East Industry Zone, Huangyan Town, Xi Ninghe County, Zhejiang P.R.C. 315333