


## Radial Lead Type

Series : **SU (Bi-polar)** Type : **A**



### Features

- Endurance : 85 °C 2000 h
- RoHS compliant


### Specifications

Category temperature range	-40 °C to +85 °C	
Rated voltage range	6.3 V.DC to 50 V.DC	
Capacitance range	2.2 μF to 6800 μF	
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	I ≤ 0.03 CV +3 (μA) After 5 minutes	
Dissipation factor (tan δ)	Please see the attached characteristics list	
Endurance	After 2000 hours application of DC working voltage (1000 hours for each polarity) at +85 °C±2 °C, when the capacitors are restored to 20 °C, the capacitors shall meet the following limits.	
	Capacitance change	Within ±20 % of the initial value
	tan δ	≤ 150 % of the initial limit
	DC leakage current	Within the initial limit
Shelf life	After storage for 1000 hours at +85 °C±2 °C with no voltage applied and then being stabilized at +20 °C capacitors shall meet the limits specified in Endurance. (With voltage treatment)	

### Frequency correction factor for ripple current

Frequency (Hz)	50, 60	120	1 k	10 k to
Correction factor	0.70	1.00	1.30	1.70

### Dimensions

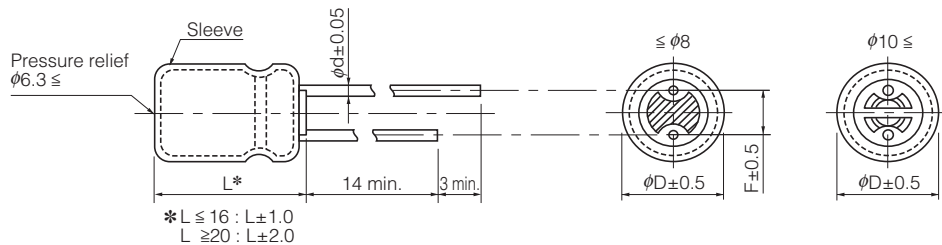

(Unit : mm)

φD	5	6.3	8	10	12.5	16	18
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5

## Characteristics list (Bi-polar)

Endurance : 85 °C 2000 h (1000 hours for each polarity)

Rated voltage (V.DC)	Cap. (±20 %) (μF)	Case size (mm)		Specification		Lead length (mm)			Part No.	Min. Packaging Q'ty		
		φD	L	Ripple current (120 Hz) (+85 °C) (mA r.m.s.)	tan δ (120 Hz) (+20 °C)	Lead dia. φd	Lead space			Straight leads (pcs)	Taping (pcs)	
							Straight	Taping *B				Taping *i
6.3	330	8	11.5	250	0.30	0.6	3.5	5.0		ECEA0JN331U( )	200	1000
	470	10	12.5	310	0.30	0.6	5.0	5.0		ECEA0JN471X( )	200	500
	1000	10	20	430	0.30	0.6	5.0	5.0		ECEA0JN102U( )	200	500
	2200	12.5	25	660	0.32	0.6	5.0	5.0		ECEA0JN222U( )	200	500
	3300	16	25	760	0.34	0.8	7.5	7.5		ECEA0JN332U( )	100	250
	4700	16	31.5	1170	0.36	0.8	7.5			ECEA0JN472U	100	
	6800	18	35.5	1450	0.40	0.8	7.5			ECEA0JN682U	50	
10	47	5	11	90	0.25	0.5	2.0	5.0	2.5	ECEA1AN470U( )	200	2000
	100	6.3	11.2	130	0.25	0.5	2.5	5.0	2.5	ECEA1AN101X( )	200	2000
	220	8	11.5	200	0.25	0.6	3.5	5.0		ECEA1AN221U( )	200	1000
	330	10	16	280	0.25	0.6	5.0	5.0		ECEA1AN331U( )	200	500
	470	10	16	340	0.25	0.6	5.0	5.0		ECEA1AN471U( )	200	500
	1000	12.5	20	470	0.25	0.6	5.0	5.0		ECEA1AN102X( )	200	500
	2200	16	25	690	0.27	0.8	7.5	7.5		ECEA1AN222U( )	100	250
	3300	16	31.5	1090	0.29	0.8	7.5			ECEA1AN332U	100	
4700	18	35.5	1200	0.31	0.8	7.5			ECEA1AN472U	50		
16	10	5	11	40	0.20	0.5	2.0	5.0	2.5	ECEA1CN100U( )	200	2000
	22	5	11	60	0.20	0.5	2.0	5.0	2.5	ECEA1CN220U( )	200	2000
	33	5	11	80	0.20	0.5	2.0	5.0	2.5	ECEA1CN330U( )	200	2000
	47	6.3	11.2	100	0.20	0.5	2.5	5.0	2.5	ECEA1CN470U( )	200	2000
	220	10	12.5	260	0.20	0.6	5.0	5.0		ECEA1CN221X( )	200	500
	330	10	16	330	0.20	0.6	5.0	5.0		ECEA1CN331U( )	200	500
	470	10	20	380	0.20	0.6	5.0	5.0		ECEA1CN471U( )	200	500
	1000	12.5	25	560	0.20	0.6	5.0	5.0		ECEA1CN102U( )	200	500
	2200	16	31.5	750	0.22	0.8	7.5			ECEA1CN222U	100	
	3300	18	35.5	900	0.24	0.8	7.5			ECEA1CN332U	50	
25	10	5	11	45	0.15	0.5	2.0	5.0	2.5	ECEA1EN100U( )	200	2000
	22	5	11	60	0.15	0.5	2.0	5.0	2.5	ECEA1EN220X( )	200	2000
	33	6.3	11.2	90	0.15	0.5	2.5	5.0	2.5	ECEA1EN330U( )	200	2000
	47	6.3	11.2	110	0.15	0.5	2.5	5.0	2.5	ECEA1EN470U( )	200	2000
	100	8	11.5	180	0.15	0.6	3.5	5.0		ECEA1EN101U( )	200	1000
	220	10	16	320	0.15	0.6	5.0	5.0		ECEA1EN221U( )	200	500
	330	12.5	20	350	0.15	0.6	5.0	5.0		ECEA1EN331U( )	200	500
	470	12.5	20	430	0.15	0.6	5.0	5.0		ECEA1EN471U( )	200	500
	1000	16	25	680	0.15	0.8	7.5	7.5		ECEA1EN102U( )	100	250
	2200	18	35.5	900	0.17	0.8	7.5			ECEA1EN222U	50	
35	10	5	11	43	0.15	0.5	2.0	5.0	2.5	ECEA1VN100U( )	200	2000
	22	6.3	11.2	80	0.15	0.5	2.5	5.0	2.5	ECEA1VN220U( )	200	2000
	33	8	11.5	100	0.15	0.6	3.5	5.0		ECEA1VN330U( )	200	1000
	47	8	11.5	120	0.15	0.6	3.5	5.0		ECEA1VN470U( )	200	1000
	100	10	16	230	0.15	0.6	5.0	5.0		ECEA1VN101U( )	200	500
	220	12.5	20	360	0.15	0.6	5.0	5.0		ECEA1VN221U( )	200	500
	330	12.5	20	450	0.15	0.6	5.0	5.0		ECEA1VN331U( )	200	500
	470	12.5	25	590	0.15	0.6	5.0	5.0		ECEA1VN471U( )	200	500

· When requesting taped product, please put the letter "B" or "i" between the "( )". Lead wire pitch \*B=5 mm, 7.5 mm, i=2.5 mm.

· Please refer to the page of "Taping dimensions".

## Characteristics list (Bi-polar)

Endurance : 85 °C 2000 h (1000 hours for each polarity)

Rated voltage (V.DC)	Cap. (±20 %) (μF)	Case size (mm)		Specification		Lead length (mm)			Part No.	Min. Packaging Q'ty		
		φD	L	Ripple current (120 Hz) (+85 °C) (mA r.m.s.)	tan δ (120 Hz) (+20 °C)	Lead dia. φd	Lead space			Straight leads (pcs)	Taping (pcs)	
							Straight	Taping *B				Taping *i
50	2.2	5	11	18	0.15	0.5	2.0	5.0	2.5	ECEA1HN2R2U( )	200	2000
	3.3	5	11	25	0.15	0.5	2.0	5.0	2.5	ECEA1HN3R3U( )	200	2000
	4.7	5	11	30	0.15	0.5	2.0	5.0	2.5	ECEA1HN4R7U( )	200	2000
	10	6.3	11.2	50	0.15	0.5	2.5	5.0	2.5	ECEA1HN100U( )	200	2000
	22	8	11.5	90	0.15	0.6	3.5	5.0		ECEA1HN220U( )	200	1000
	33	8	11.5	110	0.15	0.6	3.5	5.0		ECEA1HN330U( )	200	1000
	47	10	12.5	140	0.15	0.6	5.0	5.0		ECEA1HN470U( )	200	500
	100	10	20	250	0.15	0.6	5.0	5.0		ECEA1HN101U( )	200	500
	220	12.5	25	360	0.15	0.6	5.0	5.0		ECEA1HN221U( )	200	500
	330	16	25	450	0.15	0.8	7.5	7.5		ECEA1HN331U( )	100	250
470	16	31.5	590	0.15	0.8	7.5			ECEA1HN471U	100		

· When requesting taped product, please put the letter "B" or "i" between the "( )". Lead wire pitch \*B=5 mm, 7.5 mm, i=2.5 mm.

· Please refer to the page of "Taping dimensions".

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[ECE-A1CN100U](#) [ECE-A1CN101U](#) [ECE-A1CN220U](#) [ECE-A1EN4R7UB](#) [ECE-A1AN220UB](#) [ECE-A1CN331U](#) [ECE-A1CN471U](#) [ECE-A1HN3R3U](#) [ECE-A1HN470U](#) [ECE-A1HN471U](#) [ECE-A1EN101U](#) [ECE-A1EN220X](#) [ECE-A1EN221U](#) [ECE-A1EN221UB](#) [ECE-A1EN470U](#) [ECE-A1HN100U](#) [ECE-A1HN220U](#) [ECE-A1HN2R2U](#) [ECE-A1AN101X](#) [ECE-A1HN4R7U](#) [ECE-A1HN331U](#) [ECE-A1EN102U](#) [ECE-A1HN101U](#) [ECE-A0JN101UB](#) [ECE-A0JN221U](#) [ECE-A0JN221UB](#) [ECE-A0JN330U](#) [ECE-A0JN330UB](#) [ECE-A0JN470U](#) [ECE-A0JN470UB](#) [ECE-A0JN472U](#) [ECE-A0JN682U](#) [ECE-A1AN101XB](#) [ECE-A1AN102X](#) [ECE-A1AN102XB](#) [ECE-A1AN220U](#) [ECE-A1AN221U](#) [ECE-A1AN222U](#) [ECE-A1AN222UB](#) [ECE-A1AN330U](#) [ECE-A1AN330UB](#) [ECE-A1AN331U](#) [ECE-A1AN331UB](#) [ECE-A1AN332U](#) [ECE-A1AN470UB](#) [ECE-A1AN471U](#) [ECE-A1AN471UB](#) [ECE-A1AN472U](#) [ECE-A1CN100UB](#) [ECE-A1CN101UB](#) [ECE-A1CN102U](#) [ECE-A1CN102UB](#) [ECE-A1CN220UB](#) [ECE-A1CN221X](#) [ECE-A1CN221XB](#) [ECE-A1CN222U](#) [ECE-A1CN330U](#) [ECE-A1CN331UB](#) [ECE-A1CN332U](#) [ECE-A1CN470U](#) [ECE-A1CN470UB](#) [ECE-A1CN471UB](#) [ECE-A1EN100U](#) [ECE-A1EN100UB](#) [ECE-A1EN101UB](#) [ECE-A1EN102UB](#) [ECE-A1EN220XB](#) [ECE-A1EN222UE](#) [ECE-A1EN330U](#) [ECE-A1EN330UB](#) [ECE-A1EN331U](#) [ECE-A1EN331UB](#) [ECE-A1EN3R3U](#) [ECE-A1EN3R3UB](#) [ECE-A1EN470UB](#) [ECE-A1EN471U](#) [ECE-A1EN471UB](#) [ECE-A1EN4R7U](#) [ECE-A1HN100UB](#) [ECE-A1HN101UB](#) [ECE-A1HN220UB](#) [ECE-A1HN221U](#) [ECE-A1HN221UB](#) [ECE-A1HN2R2UB](#) [ECE-A1HN330U](#) [ECE-A1HN330UB](#) [ECE-A1HN331UB](#) [ECE-A1HN3R3UB](#) [ECE-A1HN470UB](#) [ECE-A1HN4R7UB](#) [ECE-A1VN100U](#) [ECE-A1VN100UB](#) [ECE-A1VN101U](#) [ECE-A1VN101UB](#) [ECE-A1VN220U](#) [ECE-A1VN220UB](#) [ECE-A1VN221U](#) [ECE-A1VN221UB](#) [ECE-A1VN330U](#) [ECE-A1VN330UB](#)