



**COMPLEMENTARY SILICON POWER  
DARLINGTON TRANSISTORS**

■ **SGS-THOMSON PREFERRED SALESTYPES**

**DESCRIPTION**

The BDW91 is a silicon epitaxial-base NPN transistors in monolithic Darlington configuration mounted in Jedec TO-39 metal case, intended for use in linear and switching applications.

The complementary PNP types is BDW92.

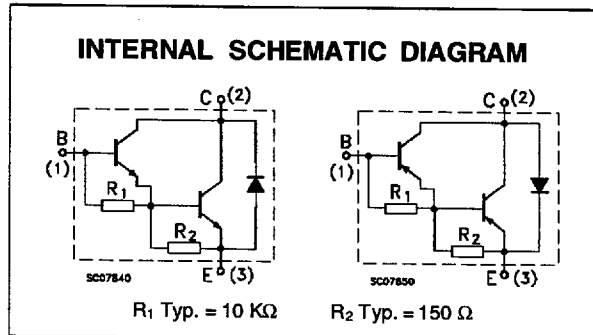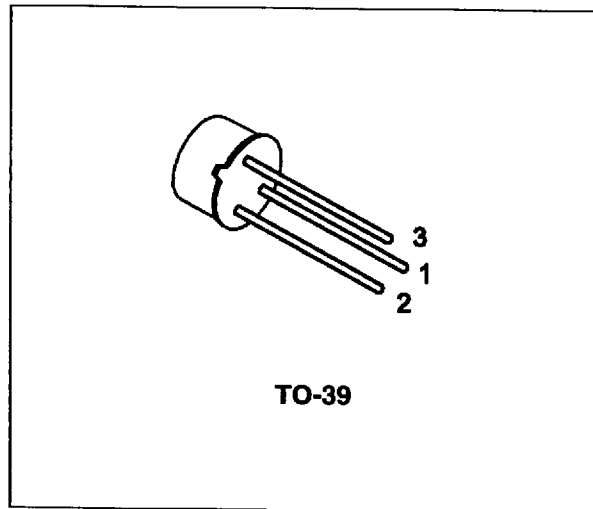

**ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Value		Unit
		NPN	BDW91	
		PNP	BDW92	
V <sub>CB0</sub>	Collector-Base Voltage (I <sub>E</sub> = 0)		180	V
V <sub>CEO</sub>	Collector-Emitter Voltage (I <sub>B</sub> = 0)		180	V
V <sub>EBO</sub>	Emitter-Base Voltage (I <sub>C</sub> = 0)		6	V
I <sub>C</sub>	Collector Current		4	A
I <sub>B</sub>	Base Current		100	mA
P <sub>tot</sub>	Total Dissipation at T <sub>case</sub> ≤ 25 °C T <sub>amb</sub> ≤ 25 °C		10	W
			1	W
T <sub>stg</sub>	Storage Temperature		-65 to 200	°C
T <sub>j</sub>	Max. Operating Junction Temperature		200	°C

For PNP types voltage and current values are negative.

## BDW91/BDW92

### THERMAL DATA

$R_{thj-case}$	Thermal Resistance Junction-case	Max	17.5	$^{\circ}C/W$
$R_{thj-amb}$	Thermal Resistance Junction-amb	Max	175	$^{\circ}C/W$


### ELECTRICAL CHARACTERISTICS ( $T_{case} = 25^{\circ}C$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{CBO}$	Collector Cut-off Current ( $I_E = 0$ )	$V_{CB} = 180 V$			50	$\mu A$
$I_{CEO}$	Collector Cut-off Current ( $I_B = 0$ )	$V_{CE} = 90 V$			50	$\mu A$
$I_{EBO}$	Emitter Cut-off Current ( $I_C = 0$ )	$V_{EB} = 6 V$	0.4		2	mA
$V_{CEO(sus)}^*$	Collector-Emitter Sustaining Voltage	$I_C = 50 mA$	180			V
$V_{CE(sat)}^*$	Collector-Emitter Saturation Voltage	$I_C = 2 A$ $I_B = 4 mA$			2	V
$V_{BE}^*$	Base-Emitter Voltage	$I_C = 2 A$ $V_{CE} = 2 V$			2.5	V
$h_{FE}^*$	DC Current Gain	$I_C = 2 A$ $V_{CE} = 5 V$ $I_C = 50 mA$ $V_{CE} = 5 V$	1000 150	3000 300		
$V_F^*$	Parallel Diode Forward Voltage	$I_F = 2 A$			2.5	V
$f_{re}$	Small Signal Current Gain	$I_C = 0.5 A$ $V_{CE} = .2 V$ $f = 1 MHz$		20		MHz

\* Pulsed: Pulse duration = 300  $\mu s$ , duty cycle 1.5 %  
For PNP types voltage and current values are negative.

**TO39 MECHANICAL DATA**

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	12.7			0.500		
B			0.49			0.019
D			6.6			0.260
E			8.5			0.334
F			9.4			0.370
G	5.08			0.200		
H			1.2			0.047
I			0.9			0.035
L	45° (typ.)					

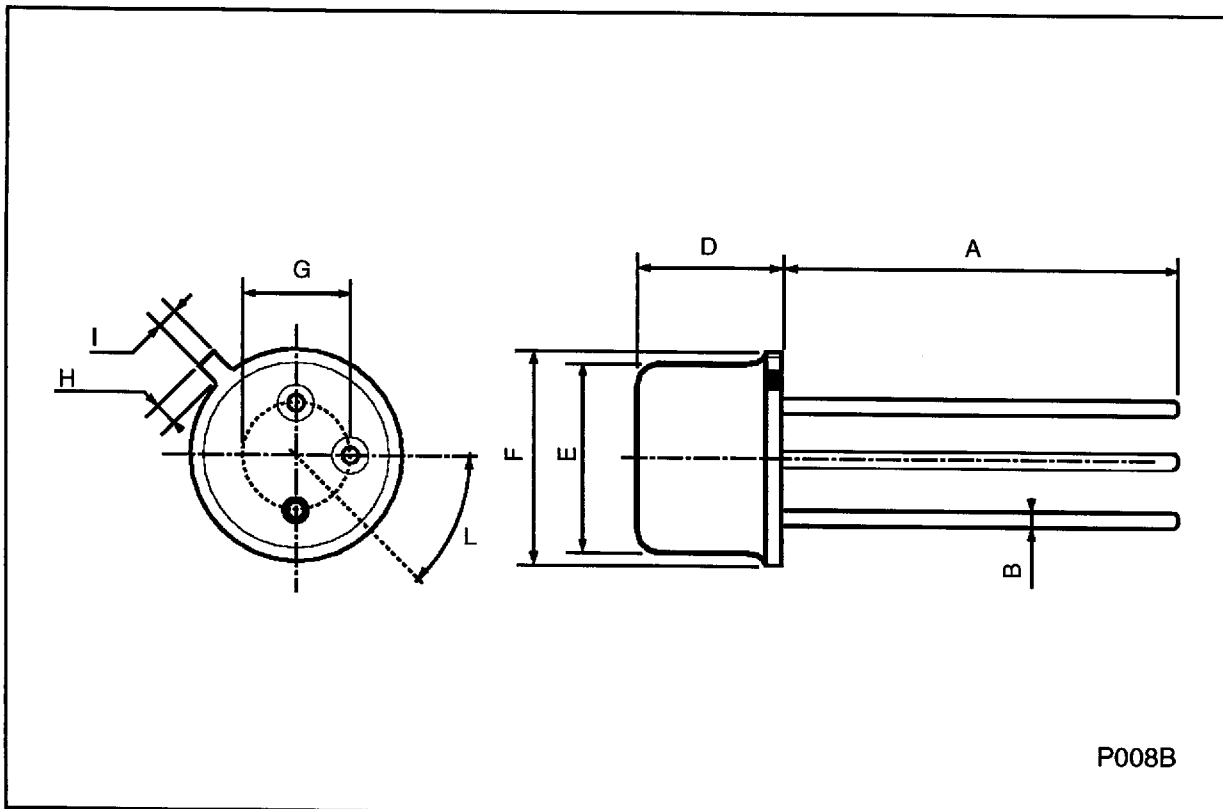

P008B