

CHOOSE A SPECIALIST FOR ALL OF YOUR CONNECTORS NEED



www.chyaoshiunn.com.tw



喬訊電子工業股份有限公司
Chyao Shiunn Electronic Industrial Ltd.



■ Organization



■ Milestone



Company Profile

Global Footprints



Design ●

Sales ●

Manufacturing ●

Tooling ●

1997 1999 2001 2002 2004 2006 2008 2010 2012

Set up Chyao Shiunn (Shanghai) factory in China

ISO 9001 Approved


Set up Chyao Shiunn (Qingdao) in China.

ISO 14001 OHSAS 18001 Approved

Set up Chyao Shiunn Malaysia Branch Office




Wire to Board Connectors

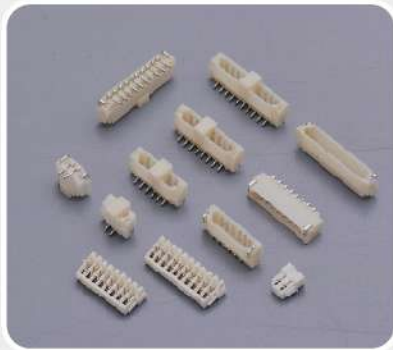

0.8mm(.031") IDC TYPE

- wafer : JS-ID0801V(180°)
JS-ID0801H(90°)
- Poles : 2-22

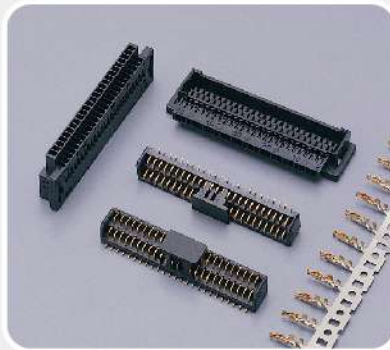


0.9mm(.035")

- Housing : JS-2453
- Wafer : JS-2454(SMT)
- Terminal : JS-2453-TG
- Poles : 40,50



1.0mm(.039")

- Housing : JS-1253
- Wafer : JS-1254(180°,SMT)
JS-1254R(90°SMT)
- Terminal : JS-1253-T / TG
- Poles : 2-20

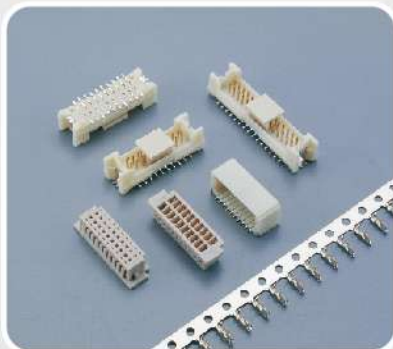

1.0mm(.039")

- Housing : JS-1253D(Double row)
- Wafer : JS-1254D(180°,SMT,Double row)
JS-1254DR(90°,Double row)
- Terminal : JS-1253-T / TG
- Poles : 10*2-25*2



1.0mm(.039")

- Housing : JS-1266
- Wafer : JS-1276(with lock lever)
- Terminal : JS-1267(SMT)
- Terminal : JS-1266-TG
- Poles : 20,30



1.0mm(.039")

- Housing : JS-1286
- Poles : 30



1.0mm(.039")

- Housing : JS-1011
- Terminal : JS-1011-T/TG
- Poles : 20



1.0mm(.039")

- Housing : JS-1022
- Terminal : JS-1022-TG
- Poles : 30



1.0mm(.039")

- Housing : JS-1288-XX
- Wafer : JS-1289-XX(180°SMT)
- Terminal : JS-1288-TG
- Poles : 2*10-2*25




1.0mm(.039")

- Housing : JS-2015
- Terminal : JS-2015-TG
- Poles : 31



1.25mm(.049")

- Housing : JS-1245
- Wafer : JS-1246(SMT)
- JS-1246R(SMT)
- Terminal : JS-1255-T / TG
- Poles : 2-30

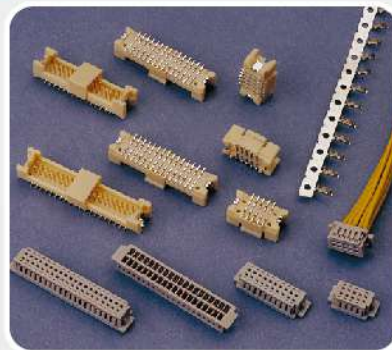

1.25mm (.049")

- Housing : JS-1255
- Wafer : JS-1256(SMT)
- Terminal : JS-1225-T / TG
- Poles : 5*2-25*2




1.25mm (.049")

- Housing : JS-1225
- Wafer : JS-1235R(SMT)
- Terminal : JS-1225-T / TG
- Poles : 2-30




1.25mm (.049")

- Housing : JS-1146
- Wafer : JS-1147, JS-1147A(180°)-DIP
- JS-1147R(90°,DIP)
- JS-1147V(180°,SMT)
- JS-1147H(90°,SMT)
- Terminal : JS-1146-T
- Poles : 02-15

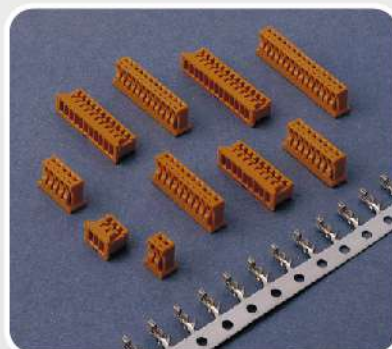

1.25mm (.049")

- Housing : JS-1250
- Wafer : JS-1251(180°)
- JS-1251R(90°)
- Terminal : JS-1250-T
- Poles : 02-15

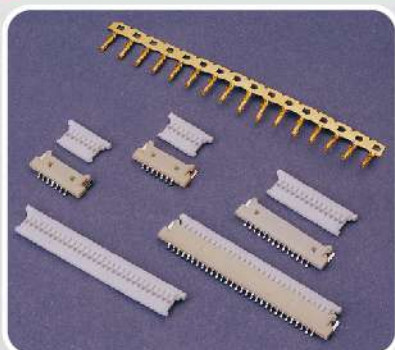


1.25mm (.049")

- Housing : JS-1258
- Wafer : JS-1259(SMT)
- Terminal : JS-1258-T / TG
- Poles : 02-30




1.25mm (.049")

- Housing : JS-1285(S/R)
- JS-2285(D/R)
- Wafer : JS-1295 (SMT,S/R)
- JS-2295 (SMT,D/R)
- Terminal : JS-1285-TG
- Poles : 2-30(S/R)
- 21,31,41(D/R)

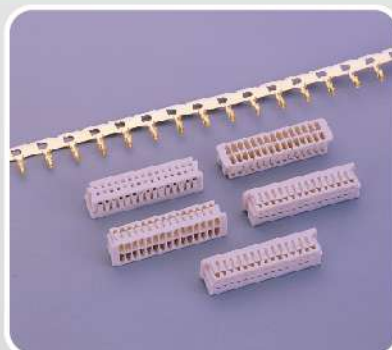


1.25mm (.049")

- Housing : JS-2255(Double row)
- Terminal : JS-2255-T / TG
- Poles : 20,30,40

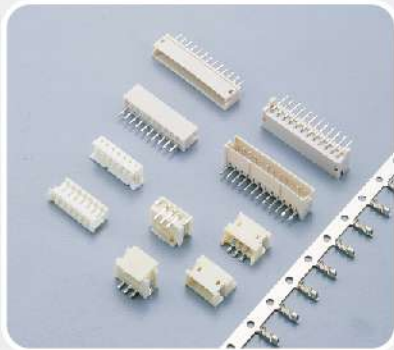


1.50mm(.059")

- Housing : JS-1173
- Wafer : JS-1174(180°,DIP)
- JS-1174R(90°,DIP)
- JS-1174V(180°,SMT)
- JS-1174H(90°,SMT)
- Terminal : JS-1173-T
- Poles : 02-13

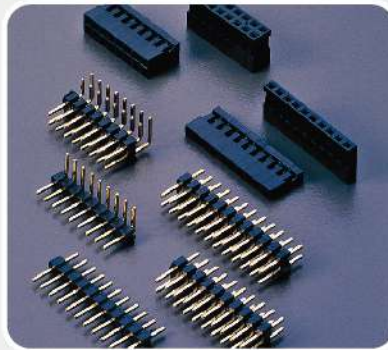


2.00mm(.079")

- Housing : JS-1126(Single row)
- JS-1127(Double row)
- Wafer : JS-1126WS,JS-1126WR(Single row)
- JS-1127WS,JS-1127WR(Double row)
- Terminal : JS-1126-T
- Poles : 01-40(Single row),
- 04-80(Double row)

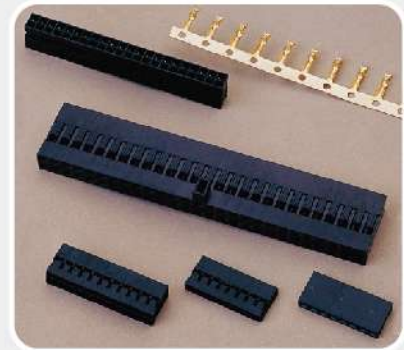

2.00mm(.079")

- Housing : JS-1163(Single row)
- JS-1164(Double row)
- JS-1164B
- JS-1164BN
- Terminal : JS-1163-T
- Poles : 02-30(Single row)
- 04-50(Double row)

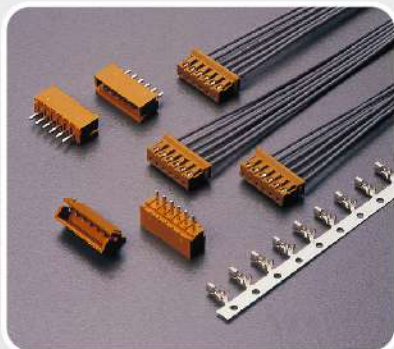


2.00mm(.079")

- Housing : JS-1101
- Wafer : JS-9001(180°)
- JS-9001R(90°)
- Terminal : JS-1101
- JS-1101-TH
- JS-1101-TL
- Poles : 02-15



2.00mm(.079")

- Housing : JS-1124
- Wafer : JS-1125(180°)
- JS-1125R(90°,DIP)
- JS-1261(180°,SMT)
- JS-1261R(90°,SMT)
- Terminal : JS-1124-T
- Poles : 02-20

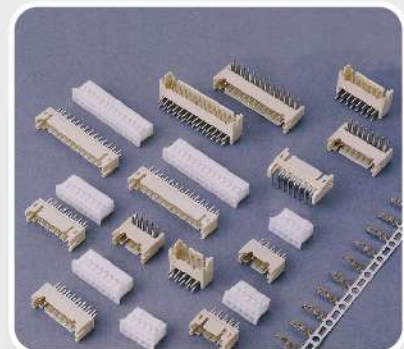


2.00mm(.079")Double row

- Housing : JS-2007
- Wafer : JS-2008(180°)
- JS-2008R(90°)
- JS-2008V-XX(SMT)
- Terminal : JS-2007-T
- Poles : 2*2-16*2



2.00mm(.079")Single row

- Housing : JS-2007S-XX HK(with locking)
- Wafer : JS-2008S-XX HK (180°, with locking)
- JS-2008SR-XX HK (90°, with locking)
- Poles : 2-20

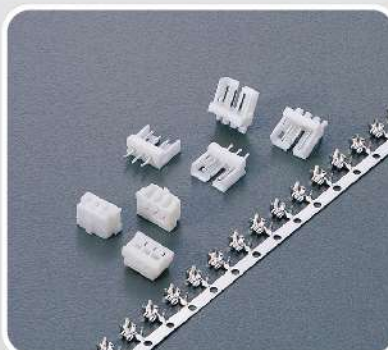


2.00mm(.079")

- Housing : JS-2005
- Wafer : JS-2006(180°)
- JS-2006R(90°)
- Terminal : JS-2005-T
- Poles : 02-15




2.00mm(.079")

- Housing : JS-2003
- Wafer : JS-2004(180°)
- JS-2004R(90°)
- Terminal : JS-2003-T
- Poles : 2-15

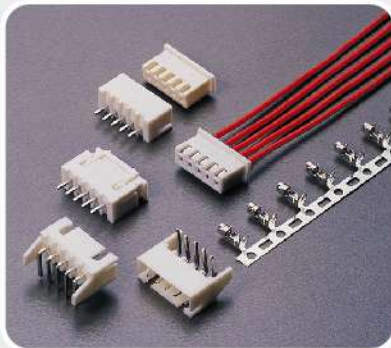


2.50mm(.098")

- Housing : JS-2001
- Wafer : JS-1001(180°)
JS-1001-**P(with boss)
JS-1001R(90°)
JS-1001V-XX / JS-1001H-XX
- Terminal : JS-2001-T
JS-2001-TB
- Poles : 02-20

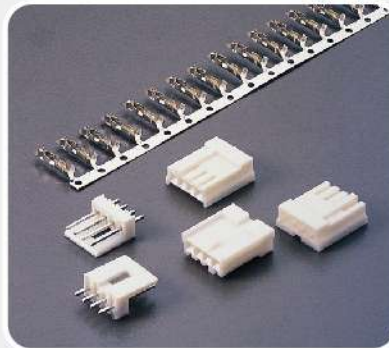


2.50mm(.098")

- Housing : JS-1116
- Wafer : JS-1116-XXW(180°)
JJS-1116-XXWR(90°)
- Terminal : JS-1116-T
- Poles : 2-8,4

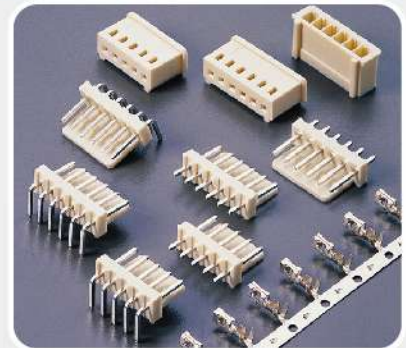


2.50mm(.098")

- Housing : JS-1128
- Wafer : JS-1129(180°)
JS-1129R(90°)
- Terminal : JS-1128-T
JS-1128-PBT
- Poles : 02-20

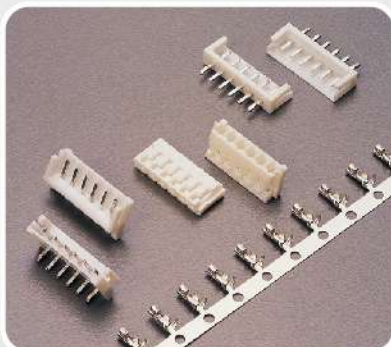


2.50mm(.098")

- Housing : JS-1131
- Wafer : JS-1132(180°)
JS-1132R(90°)
- Terminal : JS-1131-T
- Poles : 02-15

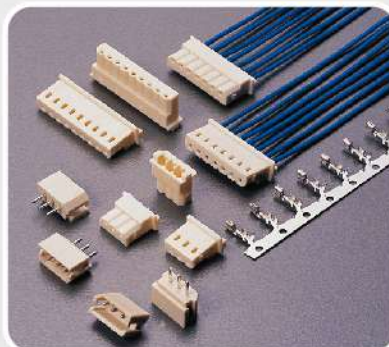


2.50mm(.098")

- Housing : JS-1136
- Wafer : JS-1135(180°)
JS-1135R(90°)
- Terminal : JS-1136-T
JS-1136-TB
- Poles : 02-20

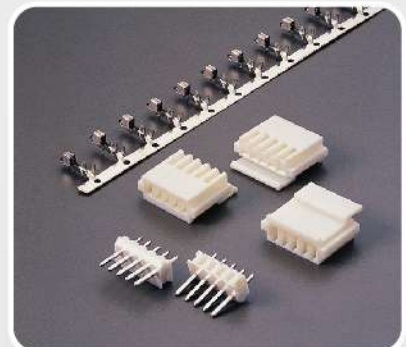


2.50mm(.098")

- Housing : JS-1140
- Wafer : JS-1141(180°)
JS-1141R(90°)
- Terminal : JS-6503-T
- Poles : 02-20

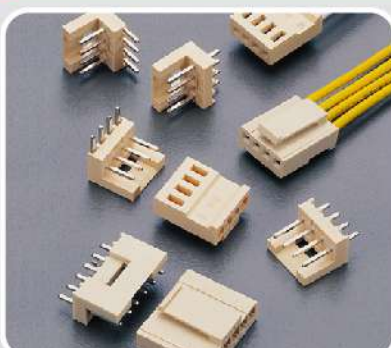


2.50mm(.098")

- Housing : JS-1170
- Wafer : JS-1169(180°)
JS-1169R(90°)
- Terminal : JS-1170-T
- Poles : 02-15

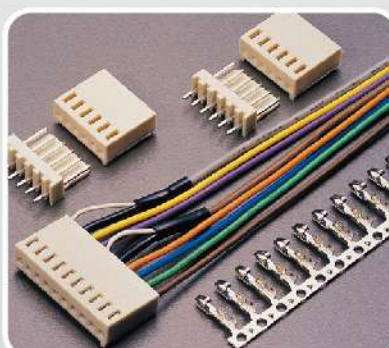


2.50mm(.098")

- Housing : JS-8002
- Wafer : JS-6002(180°)
JS-7002(90°)
- Terminal : JS-8001-T
JS-8001-PBT
- Poles : 02-15

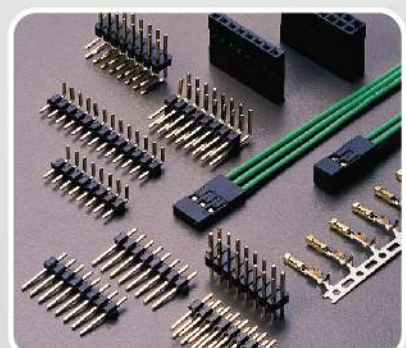


2.54mm (.100")

- Housing : JS-1108(Single row)
JS-1105,JS-1105B(Double row)
- Wafer : JS-1109(180°),JS-1110(90°)
JS-1106(180°),JS-1107(90°)
- Terminal : JS-1105-T,JS-1105-T2
JS-1108-T
- Poles : 1-40(Single row),
2-40*2(Double row)

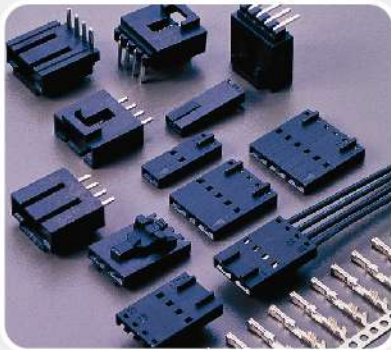


2.54mm (.100")

- Housing : JS-1142,JS1142A
JS-1142B
JS-1142DB(Double row)
- Wafer : JS-1143(180°)
JS-1143R(90°)
- Terminal : JS-1142-T / T(G)
- Poles : 02-18

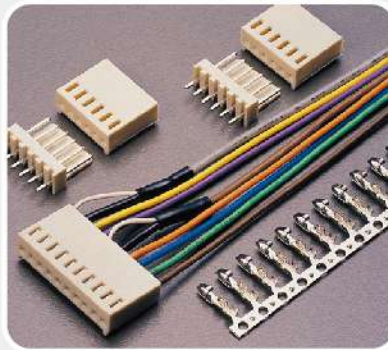


2.54mm (.100")

- Housing : JS-8001
- Wafer : JS-6001(180°)
JS-7001(90°,Right Angle)
JS-7001-xx(L)(90°,Left Angle)
- Terminal : JS-8001-T / T(G) / PBT
- Poles : 02-15

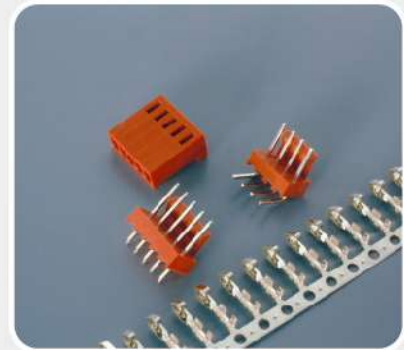

2.54mm (.100")

- Housing : JS-8254
- Wafer : JS-6254(180°)
JS-6255-03(180°,with post)
JS-7254(90°,Right Angle)
JS-7254-xx(L)(90°,Left Angle)
- Terminal : JS-8001-T / PBT
- Poles : 02-12

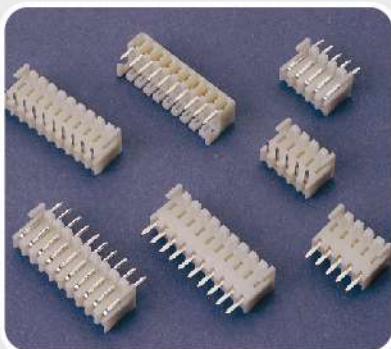

2.54mm (.100")

- Wafer : JS-5005A-xxS(Top entry)
JS-5005A-xxR(Side entry)
JS-5006A-xxDR(Bottom entry)
- Poles : 02-30




3.50mm(.138")

- Housing : JS-2011
JS-2021(Female Housing)
- Wafer : JS-2012(SMT)
JS-20121(DIP)
JS-2013(SMT,with locking)
JS-20131(DIP,with locking)
- Poles : 02




- Terminal : JS-2011-T
JS-2021-T(Male Terminal)

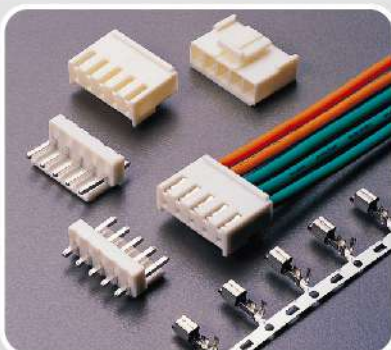


3.96mm(.156")

- Housing : JS-1121
- Wafer : JS-1120(180°)
JS-1120R(90°)
- Terminal : JS-1121-T
- Poles : 02-15

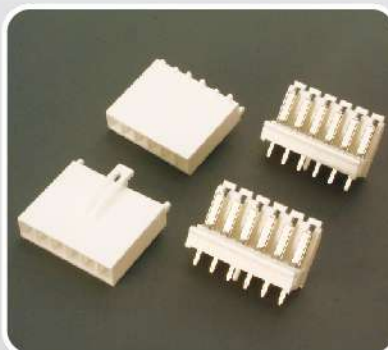


3.96mm(.156")

- Housing : JS-1138
- Wafer : JS-1139
JS-1139-xxWO/P
- Terminal : JS-5001-T / TG
JS-5001-TA(3 contacts)
- Poles : 6,12

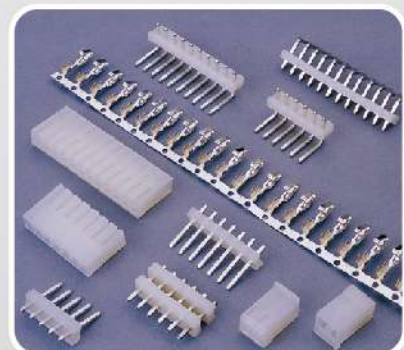


3.96mm(.156")

- Housing : JS-5001
- Wafer : JS-4002(180°,Double base)
JS-4003(180°,WO/LOCK)
JS-4003R(90°,WO/LOCK)
- Terminal : JS-5001-T / TG
JS-5001-TA(3 contacts)
- Poles : 02-20

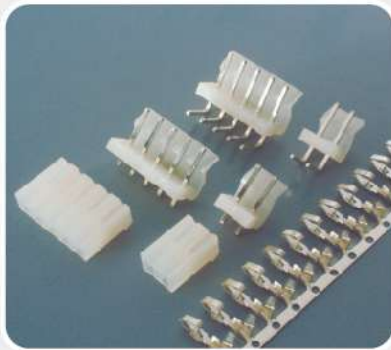


3.96mm(.156")

- Housing : JS-5001
- Wafer : JS-4001(180°)
JS-4001R(90°)
- Terminal : JS-5001-T / TG
JS-5001-TA(3 contacts)
- Poles : 02-20

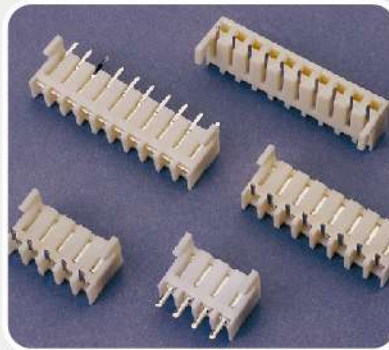


3.96mm(.156")

- Wafer : JS-5017A-xxS(Top entry)
JS-5017A-xxR(Side entry)
JS-5018A-xxDR(Bottom entry)
- Poles : 02-20

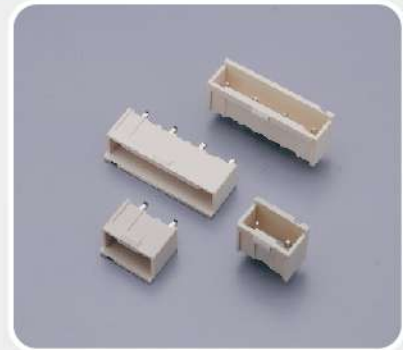

3.96mm(.156")

- Wafer : JS-1391-xx(180°)
JS-1391R-xx(90°)
- Poles : 02-15

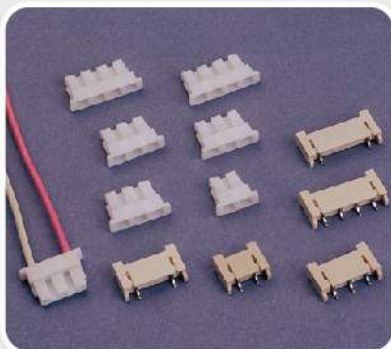

**4.0 / 8.0 / 12.0 mm
(0.157" / 0.315" / 0.472")**

- Housing : JS-2009
- Wafer : JS-2010(SMT)JS-20101(DIP)
- Terminal : JS-2009-T
- Poles : 02-12




5.0mm(.197")

- Housing : JS-1102
- Wafer : JS-1103,JS-1103-xx(B)
- Terminal : JS-1102-T,JS-1102-T(L)
- Poles : 01-06




5.0mm(.197")

- Housing : JS-5000(JS-5080)
- Wafer : JS-5010(180°)(JS-5081)
JS-5010R(90°)(JS-5081R)
- Terminal : JS-5001-T / TG
JS-5001-TA(3 contacts)
- Poles : 02-16

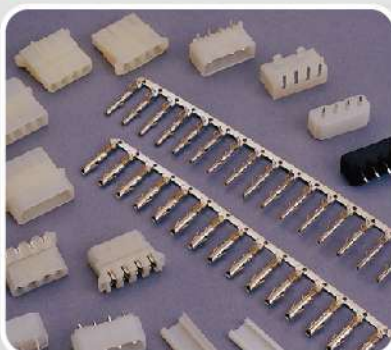

5.08mm(.200")

- Housing : JS-1114-04W,JS-1114-04H
- Wafer : JS-1114-WS(180°),JS-1114-04WR(90°)
JS-1114-04HI,JS-1114-04HL(IDC)
JS-1114P-04WS
- Terminal : JS-1114-04WT,JS-1114-04HT
- Poles : 04

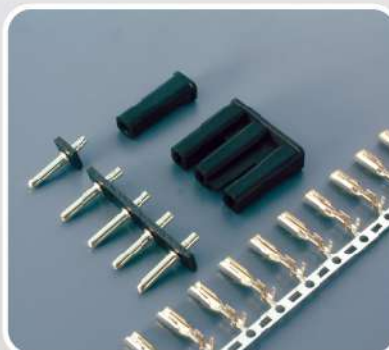


8.0mm(.315")

- Housing : JS-1123
- Wafer : JS-1122-xx(B)
- Terminal : JS-1123-T,JS-1123-T(L)
- Poles : 01-06




Wire to Wire / Power Connectors

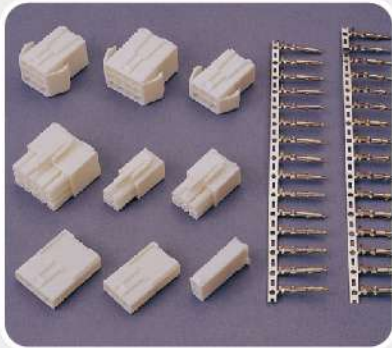


1.3Ø (.051")

- Housing : JS-2313, JS-2413, JS-2413-xxE
- Terminal : JS-23131BS-2, JS-24131BS-2
- Poles : 2,3,4,6,9,12,15

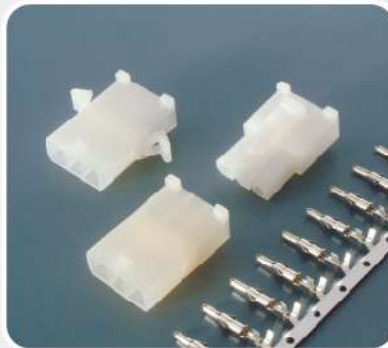


1.58Ø (.062")

- Housing : JS-23158A, JS-23158A-xxE, JS-24158A
- Terminal : JS-23158BS-2, JS-24158BS-2
- Poles : 2,3,4,5,6,9,12,15

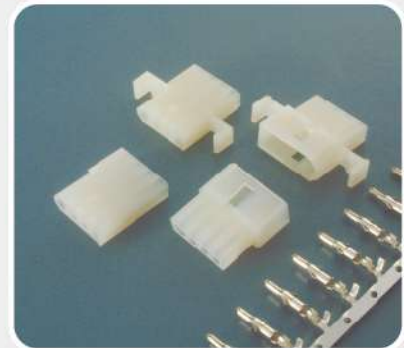


1.58Ø (.062")

- Housing : JS-23158, JS-23158B-xxE, JS-24158, JS-24158B-xxE
- Terminal : JS-23158BS-2
- Poles : 1,2,3,4,5,6,9,12,15

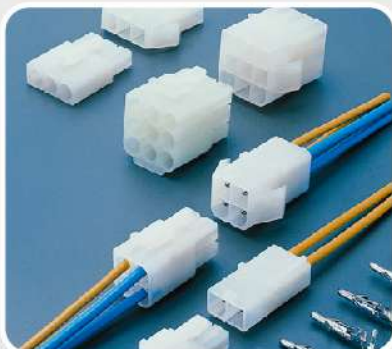

2.0Ø (.079")

- Housing : JS-2000H, JS-2000W
- Terminal : JS-2000H-TH, JS-2000W-TH, JS-2000H-TL, JS-2000W-TL
- Poles : 1,2,3,4,6,9,12,15

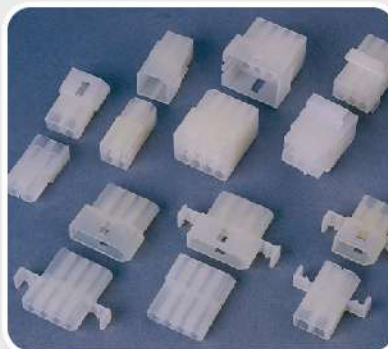


2.36Ø (.093")

- Housing : JS-2330, JS-2330B-xxE, JS-2430, JS-2430B-xxE
- Terminal : JS-2330BS-2L, JS-2430BS-2L
- Poles : 2,3,4,6,9,12,15




2.36Ø (.093")

- Housing : JS-2330A, JS-2330A-xxE, JS-2430A
- Terminal : JS-2330BS-2, JS-2430BS-2
- Poles : 1,2,3,4,6,9,12,15

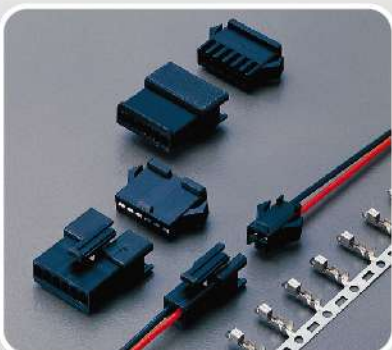

2.50mm (.098")

- Housing : JS-6503, JS-6504
- Terminal : JS-6503-T, JS-6504-T
- Poles : 02-18

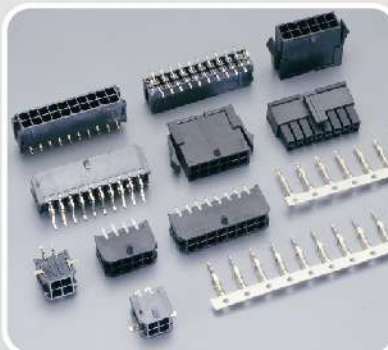


3.0mm (.118") Double row

- Housing : JS-3024(Plug), JS-3025(Receptacle)
- Wafer : JS-3026(180°, DIP), JS-3027(90°, DIP), JS-3028V(180°, SMT), JS-3028H(90°, SMT), JS-3029V(180°, SMT, W/CLIP), JS-3029H(90°, SMT, W/CLIP)
- Terminal : JS-3024-T, JS-3025-T
- Poles : 02-24



3.0mm (.118") Single row

- Housing : JS-3024S(Plug), JS-3025S(Receptacle)
- Wafer : JS-3026S(180°, DIP), JS-3027S(90°, DIP), JS-3028SV(180°, SMT), JS-3028SH(90°, SMT), JS-3029SV(180°, SMT, W/CLIP), JS-3029SH(90°, SMT, W/CLIP)
- Terminal : JS-3024-T, JS-3025-T
- Poles : 02-12

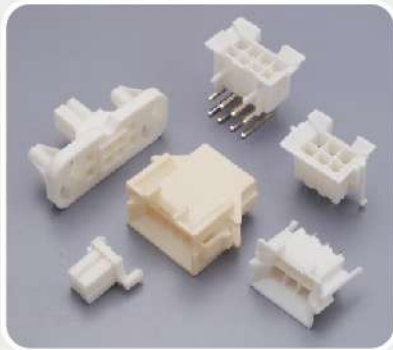


4.20mm (.165")

- Housing : JS-1148I,JS-1149IA
JS-1149IB(BMI type)
- Wafer : JS-1151I(R/A,BMI type)
JS-1153I(R/A,BMI type)



4.20mm (.165")Single row

- Housing : JS-1148S,JS-1149S
- Wafer : JS-1150S,JS-1151S(180°)
JS-1152S,JS-1153S(90°)
- Terminal : JS-1148-T,JS-1149-T
- Poles : 02-05

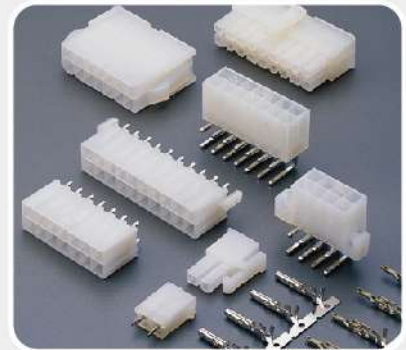

4.20mm (.165")Double row


- Housing : JS-1148,JS-1149
- Wafer : JS-1150,JS-1151(180°)
JS-1152,JS-1153,JS-1154(90°)
- Terminal : JS-1148-T,JS-1149-T
- Poles : 02-24

Board-In Connectors




4.20mm (.165")

- Housing : JS-2420-xx
JS-2421-xx
- Poles : 2X1~2X4

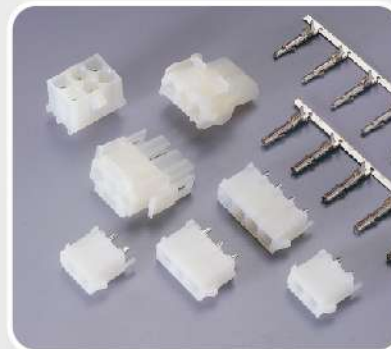


6.35mm

- Housing : JS-6350H
JS-6350W
- Wafer : JS-6350WSM(with pin terminal)
JS-6350WSF(with pin terminal)
JS-6350WSM-xxP(with peg)
JS-6350WSF-xxP(with peg)
- Terminal : JS-6350H-T
JS-6350W-T
- Poles : 2,3,4,6,9,12,15

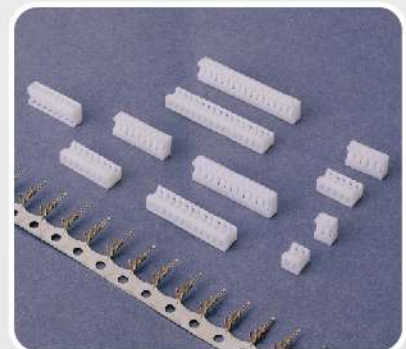


1.25mm (.049")

- Housing : JS-1252
- Terminal : JS-1252-T
- Poles : 02-15

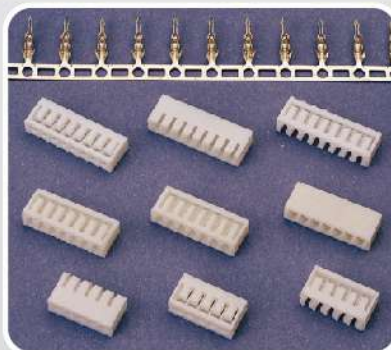


2.00mm (.079")

- Housing : JS-1130(180°)
JS-1130R(90°)
- Terminal : JS-1130-T / TP / PBT
JS-1130R-TP
- Poles : 02-15

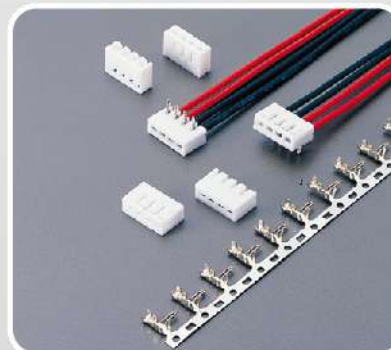

2.50mm (.098")

- Housing : JS-1137,JS-1137B(180°)
JS-1137R(90°)
- Terminal : JS-1137-T
JS-1137B-T,JS-1137-TP
JS-1137B-TP,JS-1137R-TP
- Poles : 02-16

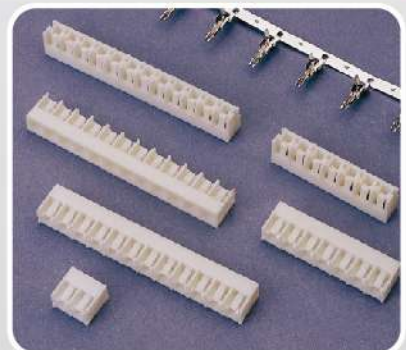

3.96mm (.156")

- Housing : JS-4008
- Terminal : JS-4008-T
- Poles : 02-15



FFC/FPC Connectors




0.50mm (.020") SMT TYPE

- FFC/FPC : JS-1191D(90°,Bottom contact)
- JS-1191DR(90°,flip-lock type)
- JS-1191U(90°,Upper contact)
- JS-1191V(180°,Top contact)
- Poles : 04-50




1.00mm (.039") SMT TYPE

- FFC/FPC : JS-1157D(90°,Bottom contact)
- JS-1157U(90°,Upper contact)
- JS-1157V(180°,Top contact)
- Poles : 4-34

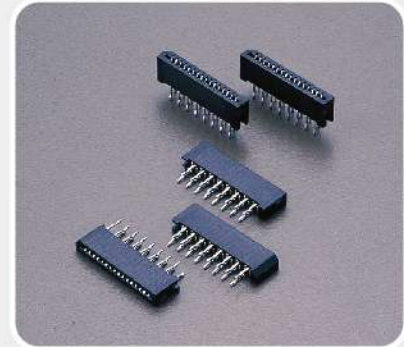


1.00mm (.039") DIP TYPE

- FFC/FPC : JS-1156(180°,NON-ZIF, D/contact)
- JS-1156S(180°,NON-ZIF, D/contact)
- JS-1156R(90°,NON-ZIF, D/contact)
- Poles : 02-36

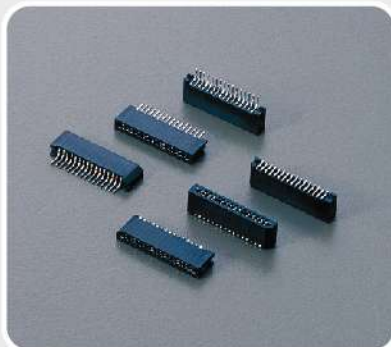

1.00mm (.039")

- FFC/FPC : JS-1157(90°,NON-ZIF,SMT)
- JS-1158(180°,NON-ZIF,SMT)
- Poles : 02-36

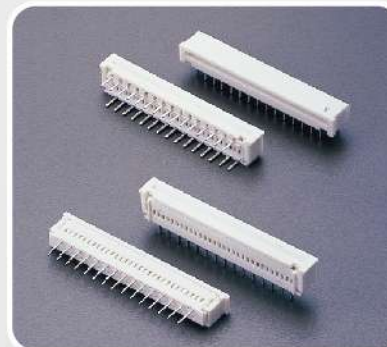

1.25mm (.049")


- FFC/FPC : JS-1155(180°,DIP)
- JS-1155R(90°,DIP)
- Poles : 03-40



1.25mm (.049")


- FFC/FPC : JS-1155A(180°,DIP)
- JS-1155AR(90°,DIP)
- Poles : 04-36

Headers/Jumpers/Sockets/Other Connectors

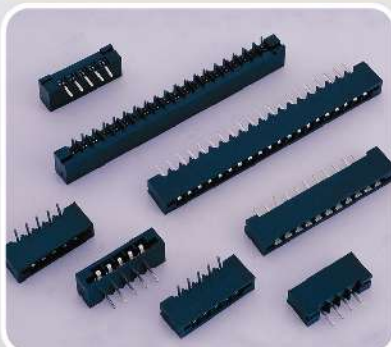


2.54mm (.100")

- FFC/FPC : JS-1160(180°)
- JS-1160R(90°)
- Poles : 02-30

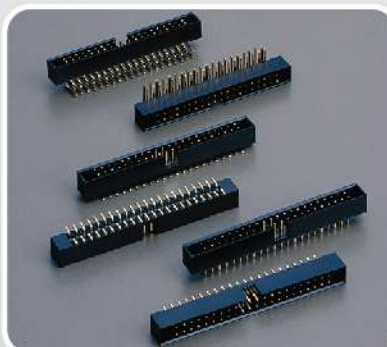

2.00mm (.079")

- Box Header : JS-1300(180°)
- JS-1300R(90°)
- JS-1300D(SMT)
- Poles : 04-68

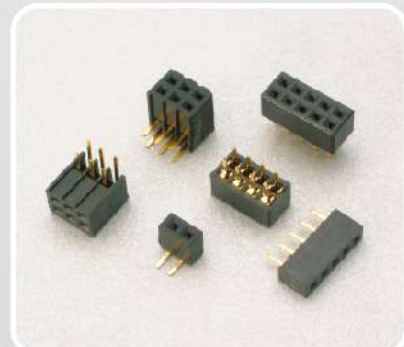


2.00mm (.079")

- Part No : JS-1192SD1G(Straight,Single row)
- JS-1192RD1G(Right Angle,Single row)
- JS-1193SD1G(Straight,Double row)
- JS-1193RD1G(Right Angle,Double row)
- Poles : 2-40(Single row),4-80(Double row)




2.00mm (.079")

- Part No : JS-11801SFTD
- Poles : 1-40

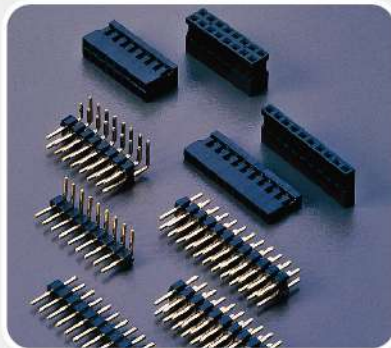

2.00mm (.079")

- Housing : JS-1126(Single row)
JS-1127(Double row)
- Wafer : JS-1126WS,JS-1126WR(Single row)
JS-1127WS,JS-1127WR(Double row)
- Terminal : JS-1126-T
- Poles : 01-40(Single row),
04-80(Double row)

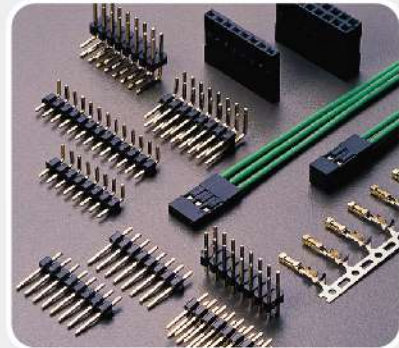


2.54mm (.100")

- Housing : JS-1108(Single row)
JS-1105,JS-1105B(Double row)
- Wafer : JS-1109(180°),JS-1110(90°)
JS-1106(180°),JS-1107(90°)
JS-1109DB,JS1110DB
- Terminal : JS-1105-T,JS-1105-T2,JS-1108-T
- Poles : 1-40(Single row),2-40*2(Double row)



2.54mm (.100")

- Part No : JS-11791SFTD
- Poles : 1-40

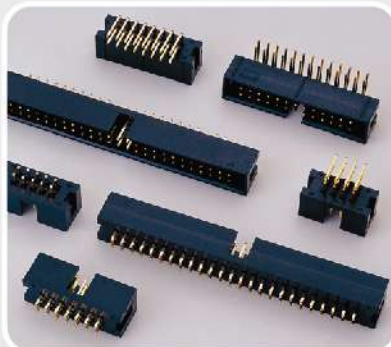

2.54mm (.100")

- Box Header
Part No : JS-1200(Straight)
JS-1200R(Right Angle)
JS-1200D(SMT type)
- Poles : 6-64



2.54mm (.100")

- Box Header : JS-1200WS(180°)
JS-1200WR(90°)
- Poles : 10-64



2.54mm (.100")

- Part No : JS-1165SD1G(Straight,Single row)
JS-1165RD1G(Right Angle,Single row)
JS-1166SD1G(Straight,Double row)
JS-1166RD1G(Right Angle,Double row)
- Poles : 2-40(Single row),4-80(Double row)




2.54mm (.100")

- Part No : JS-1179F
JS-1179FN
JS-1179-FxxN
- Poles : 6-48



2.54mm (.100")

- Part No : JS-1179RF
JS-1179-RFN
- Poles : 6-48

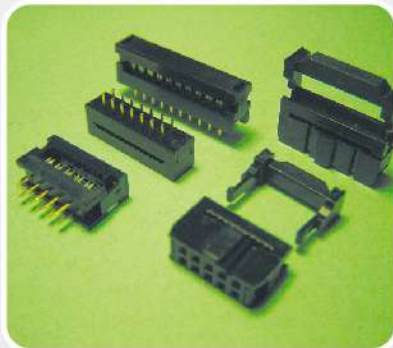

IDC plug:2.0mm/2.54mm
IDC Socket:2.0mm/2.54mm




2.00mm
■ JS-M200035
■ JS-M200050
2.54mm
■ JS-M254045
■ JS-M254060
■ JS-M254080
■ JS-M254135


I/O Connectors



Mini USB
■ A/B Type
■ Plug/Receptacle

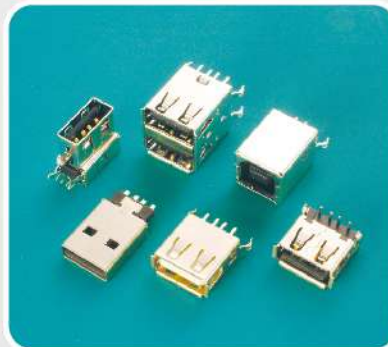


USB (1.1 and 2.0)
■ A/B Type
■ Plug/Receptacle
■ DIP/SMT type

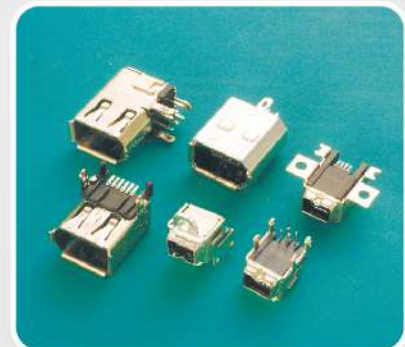

IEEE 1394
■ Plug/Receptacle



HDMI/SATA Connectors

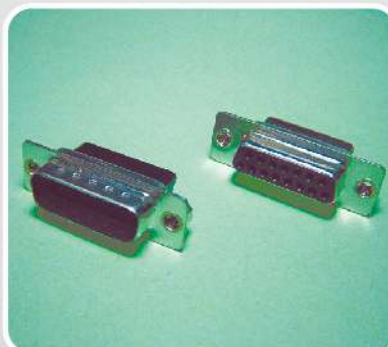

D-SUB R/A
D-SUB H/D
Slim D-SUB



1.00mm Card Edge
SMT Connector
■ JS-1088-100A ML
■ Poles : 2X50

Card Edge Connectors




Wire to Board Connectors



0.6mm(.023") IDC TYPE

- Housing: JS-ID0600
- Wafer: JS-ID0601H (90°,SMT)
- Terminal: JS-ID0601H
- Poles : 02-30

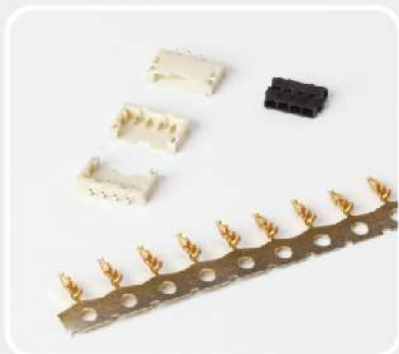

1.2mm(.047")

- Housing: JS-1201-XX
- Wafer: JS-1202-XX(SMT)
- Terminal: JS-1201-T & -TG
- Poles : 02-04



1.25mm(.049")

- Housing: JS-1288S-XX
- Wafer: JS-1289S-XX (180°,SMT)
- Terminal: JS-1289SR-XX (90°,SMT)
- Terminal: JS-1288S-T4
- Poles : 02-15




1.5mm(.059")

- Housing: JS-1501-XX
- Wafer: JS-1500V-XX (180°,SMT)
- Terminal: JS-1500H-XX (90°,SMT)
- Terminal: JS-1501-T
- Poles : 02-15



2.0mm(.079")

- Housing: JS-2002H-XX
- Wafer: JS-2002-XX (180°,DIP)
- Terminal: JS-2002R-XX (90°,DIP)
- Terminal: JS-2002M-XX (180°,SMT)
- Terminal: JS-2002RM-XX (90°,SMT)
- Terminal: JS-2002H-T
- Poles : 04-20

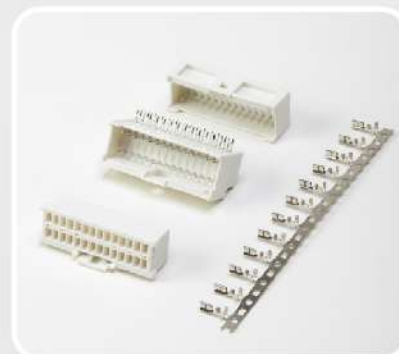


2.0mm(.079")

- Housing : JS-2017-XX*2 (Double row)
- Wafer : JS-2018-XX*2 (Double row)
- Terminal : JS-2018R-XX*2 (Double row)
- Terminal : JS-2017-T
- Poles : 4x2-20x2



2.5mm(.098")

- Housing : JS-2501-XX
- Wafer : JS-2501-XX (Signal DBL-Lock Post Header)
- Terminal : JS-2501-T
- Poles : 02-13

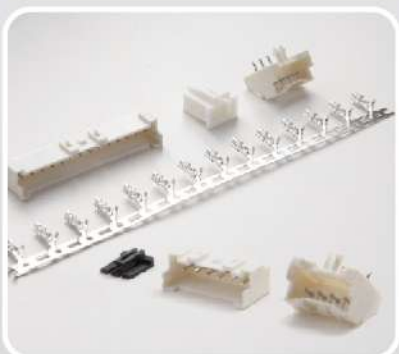

2.5mm(.098")

- Housing: JS-2504H-XXCV
- Wafer: JS-2503A-XXDM
- Terminal: JS-2503RA-XXDM
- Terminal: JS-2504-T4
- Poles: 02-20




Board to Board Connectors



0.5mm(.020") SMT TYPE


- WAFER: JS-0511-XX
JS-0512-XX
- Poles: 10-160

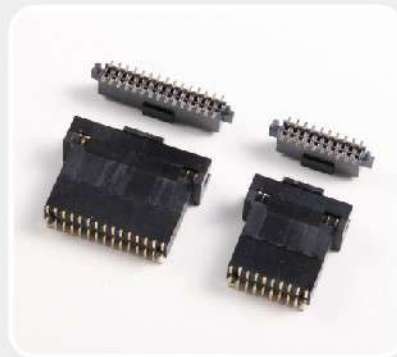

1.27mm(0.05") SMT TYPE

- WAFER: JS-1178E-XX
JS-1183V-XX
- Poles: 10-100

FFC/FPC Connectors

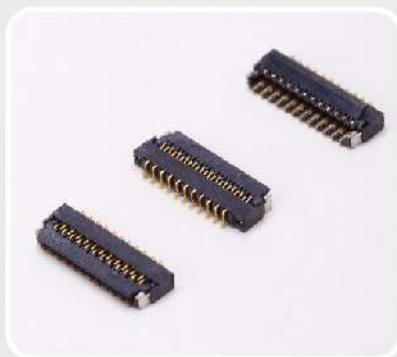

0.3mm(.012") SMT TYPE

- JS-1194D1-XX (H:1.0mm)(Easy-ON)
- Poles : 13-73




0.5mm(.020") SMT TYPE

- JS-0505-XXGM (H:2.7mm) (Easy-ON)
- Poles: 04-60



0.5mm(.020") SMT TYPE

- JS-0507-XX (H=1.5mm)
- Poles: 04-60

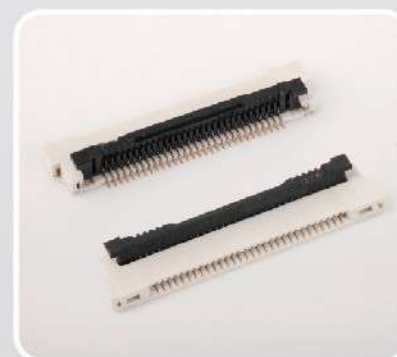

0.5mm (.020") SMT TYPE

- JS-0528-XX (H:1.5mm)(Easy-ON)
- Poles: 30



1.0mm(.039") SMT TYPE

- JS-1157H1-XXNH (H:2.0mm)(NON-ZIF)
- Poles : 04-20



1.0mm(.039") SMT TYPE

- JS-1003A-XX (H:1.5mm)(Easy-ON)
- Poles : 04-30



NETWORK / COMMUNICATION DEVICES

CHYAO SHIUNN

www.chyaoshiunn.com.tw

IT APPLIANCE

CHYAO SHIUNN

www.chyaoshiunn.com.tw



AUTOMOTIVE MULTI-MEDIA

CHYAO SHIUNN

www.chyaoshiunn.com.tw

HOUSEHOLD APPLICATION

CHYAO SHIUNN

www.chyaoshiunn.com.tw



Headquarter



■ 台北總公司
Taipei Headquarter

China Factory



■ 上海工廠
Shanghai Factory



■ 東莞工廠
Dong Guan Factory

ASIA & PACIFIC

喬訊電子(東莞)有限公司

CHYAO SHIUNN ELECTRONIC (DONGGUAN) CO., LTD.

廣東省東莞市長安鎮新安社區橫崗頭工業區

Dongguan Henggang Industrial Zone, Xin' an, Changan Dong Guan City, Guangdong, China ZIP: 523880

Tel: +86-769-8999-2688 Fax: +86-769-8999-2699

E-mail: csdg805@csdg-cn.com / csdgs01@chyaoshiunn.com.tw

喬訊電子(上海)有限公司

CHYAO SHIUNN ELECTRONIC (SHANGHAI) CO., LTD.

中國(上海)自由貿易試驗區富特中路299號46號廠房一樓

1/F Block 46, No. 299, Fute Chung Road,

Waigaoqiao Free Trade Zone, Shanghai, China ZIP:200131

Tel: +86-21-5046-1169 Fax: +86-21-5046-1063

E-mail: csshgroup@cssh.net.cn

Korea

HANTECH CORPORATION

Tel: +82-2-3477-2571

Fax: +82-2-3477-2561

E-mail: luis99@hantechcorp.com

EUROPE

United Kingdom (U.K)

TAKBRO

Tel: +44 01623 412 160

Fax: +44 01623 412 168

E-mail: sales@takbro.co.uk

Italy

Selecom S.R.L.

Tel: +39- 02-9532 8047

Fax: +39-02-9532 8117

E-mail: selling@selecom.it

Switzerland

Conflectronic SA

Tel: +41 (0)24 430 19 18

Fax: +41 (0)24 430 18 07

E-Mail: info@conflectronic.ch

Poland

MARITEX

Tel: +48 58 781 33 74

Fax: +48 58 622 47 66

E-Mail: h.piekarski@maritex.com.pl



Austria

SENO

Tel: +43 1 6045713

Fax: +43 1 6043235

E-mail: office@seno.at

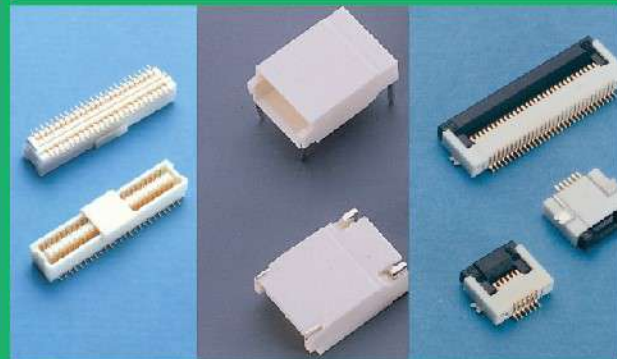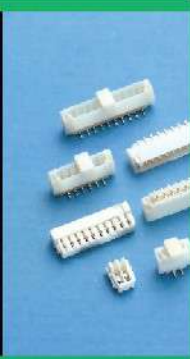

台灣總公司(Headquarter)

喬訊電子工業股份有限公司

Chyao Shiunn Electronic Industrial Ltd.

新北市淡水區中正東路一段三巷17號7F(25147)

7F #17, Lane 3, Sec 1, Chung Cheng East Rd., Tamshui District, New Taipei City, Taiwan. ZIP: 25147

Tel: +886-2-26299955, Fax: +886-2-26266677

E-mail: cs@chyaoshiunn.com.tw website: www.chyaoshiunn.com.tw

