

Features

- RoHS compliant* versions available
- Overvoltage/lightning protection to ITU-T K.20/K.21/K.45
- Resettable overcurrent protection
- Typical application is secondary protection on telecom line cards

4B06B-514-RC - Surge Line Protection Module

Electrical Characteristics

Resistance Value, 50 Ohm	
R1=R2=42 ohms	±1 %
Ratio Tolerance R1/R2	±1 %
Resistance Value, 100 Ohm	
R1=R2=92 ohms	±1 %
Ratio Tolerance R1/R2	±1 %
PPTC, R3 & R4, 8 Ohms Nominal Value	
Resistance Range	5 ohms to 15 ohms
Ratio Tolerance R3/R4	Matched to within 1.0 ohms
Trip Time at 1 Amp	2 seconds at 25 °C
Hold Current	135 ma
Temperature Range	-40 °C to +85 °C


Physical Characteristics

Body Style	Open Frame SIP
Substrate Material	96 % Alumina
Lead Frame Material	Copper, solder coated
Flammability	Conforms to UL94V-0

Functional Characteristics


Lightning Surge Test	10 x 700 μs, 1.5 kV
Power Induction	600 V rms
Power Contact	230 V rms

Product Dimensions

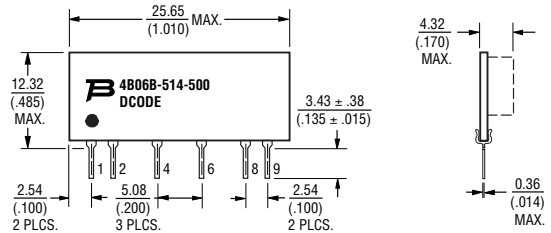

DIMENSIONS: MILLIMETERS
(INCHES)

Electrical Schematic

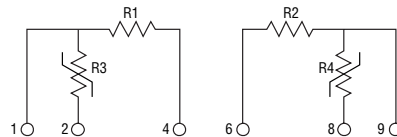

How To Order

	4B 06 B - 514 - XXX LF
Model _____	(4B = Open Frame)
Number of Pins _____	
Physical Configuration _____	
Electrical Configuration _____	514 = Matched pair of resistors plus PPTC
Resistance Code _____	• 500 = 50 Ω • 101 = 100 Ω
RoHS Compliant Option _____	Blank = Standard Product LF = RoHS Compliant Product

BOURNS®

Asia-Pacific:
TEL +886- (0)2 25624117
FAX +886- (0)2 25624116

Europe:
TEL +41-41 7685555
FAX +41-41 7685510

Americas:
TEL +1-951 781-5500
FAX +1-951 781-5700

www.bourns.com