

Item No : ECM-4522P 4.5*2.2mm, 20-12000Hz, 2V, 2.2KΩ, pin type




SENSITIVITY : 1KHz,0dB=1V/Pa

-46±2dB -44±2dB -42±2dB
-40±2dB -38±2dB -36±2dB

SPECIFICATIONS:

Impedance:	< 2.2KΩ
Directivity :	Omnidirectional
Frequency :	20-16,000Hz
Standard operation voltage :	2V
Current consumption :	Max 0.5mA
Sensitivity reduction :	Within 1.5V , Sensitivity 3dB at 1.5V
S/N ratio :	> 60dB

FREQUENCY RESPONSE:

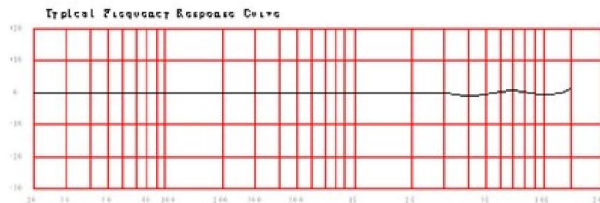

DIMENSION:

