


MATERIAL AND FINISH AS BELOW	
A	Housing LCP UL94V-0 Black
B	Contact Phosphor Bronze C5210,Gold Flash
C	Shell Stainless Steel SUS304,Nickel Plating Gold Flash Plating on Solder Tail

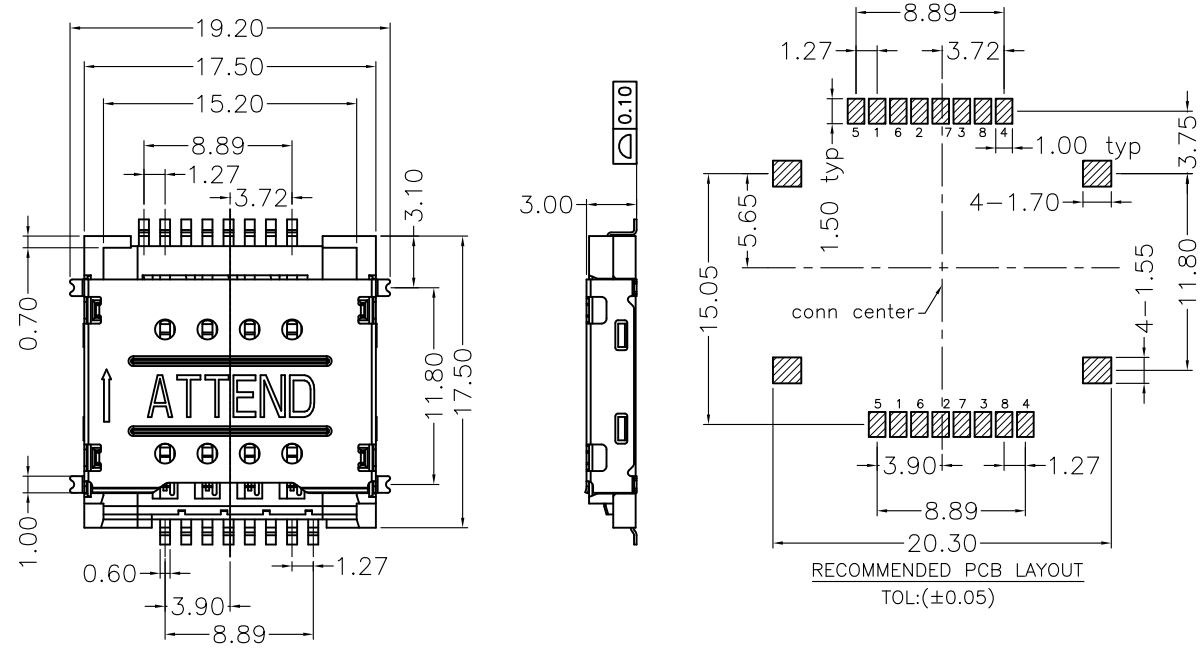

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 0.5A per pin
- 1.2 Voltage Rating: 30V AC/DC
- 1.3 Contact Resistance: 60mΩ Max
- 1.4 Insulation Resistance: 500MΩ
- 1.5 Dielectric Withstanding Voltage: 500VAC

2. MECHANICAL




- 2.1 Durability: 5000 Cycle

3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40°C~+85°C
- 3.2 Storage temperature range: -40°C~+85°C

4. SOLDER ABILITY

- 4.1 Recommended IR Reflow Temperature: 260°C 10sec

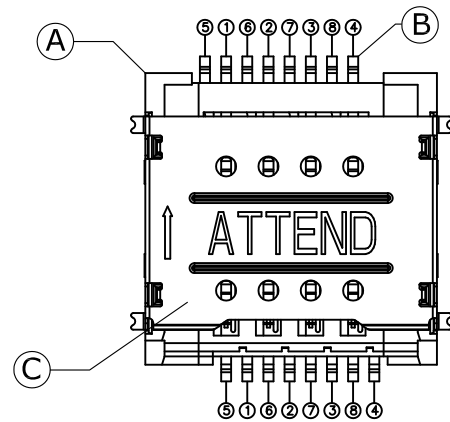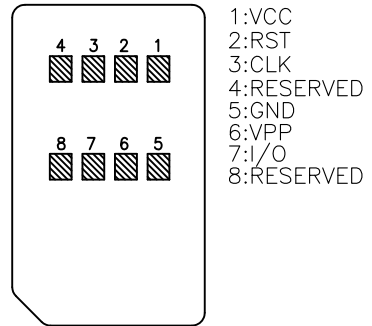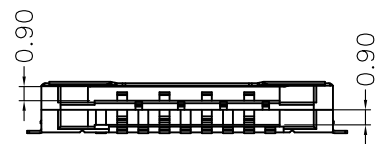

⚠	Revised Voltage Rating SPEC.	2014/11/25
⚠	Revised to New Drawing Frame	2012/10/22
REV.	DESCRIPTION	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Fros	2014/11/25
CHECKED	Ron	2014/11/25
APPROVED	Ken	2014/11/25
DRAWN NAME: SIM Card Socket Dual Port Push-Pull Type		PRODUCT NO. 115H-BA00
SIZE A4	SHEET 1/1	FILE NAME 115H-BA00_B_8



www.attend.com.tw