

FEATURES

- ▶ Industrial Standard DIP-8 Package
- ▶ Unregulated Output Voltage
- ▶ I/O Isolation 3000VDC
- ▶ Operating Ambient Temp. Range -40°C to +90°C
- ▶ Overload and Short Circuit Protection
- ▶ UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval & CE Marking


PRODUCT OVERVIEW

The MINMAX MFPU01H series is a range of isolated 1W DC-DC converter modules in DIP-8 package which feature a high I/O isolation voltage rated for 3000VDC and there are 21 models available for 3.3, 5 or 12VDC input. Advanced circuit topology provides continuous overload, short circuit protection and a high efficiency up to 82% which allows operating ambient temperatures range of -40°C to +90°C without power derating. These converters offer a better solution for all applications where a high I/O isolation and fault condition protection are required.

Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Load Regulation % (max.)	Max. capacitive Load μF	Efficiency (typ.) @Max. Load
			Max.	Min.	@Max. Load	@No Load			
			mA	mA	mA(typ.)	mA(typ.)			%
MFPU01-033S033H	3.3 (2.97 ~ 3.63)	3.3	300	6	400	45	15	220	75
MFPU01-033S05H		5	200	4	384		12		79
MFPU01-033S12H		12	84	1.68	382		12		80
MFPU01-033S15H		15	67	1.34	376		10	81	
MFPU01-033D05H		±5	±100	±2	389		12	100#	78
MFPU01-033D12H		±12	±42	±0.84	382		12		80
MFPU01-033D15H		±15	±33	±0.66	370		10		81
MFPU01-05S033H	5 (4.5 ~ 5.5)	3.3	300	6	257	30	12	220	77
MFPU01-05S05H		5	200	4	250		11		80
MFPU01-05S12H		12	84	1.68	246		9		82
MFPU01-05S15H		15	67	1.34	242		8	83	
MFPU01-05D05H		±5	±100	±2	250		11	100#	80
MFPU01-05D12H		±12	±42	±0.84	243		9		83
MFPU01-05D15H		±15	±33	±0.66	239		8		83
MFPU01-12S033H	12 (10.8 ~ 13.2)	3.3	300	6	107	17	8	220	77
MFPU01-12S05H		5	200	4	105		8		79
MFPU01-12S12H		12	84	1.68	104		8		81
MFPU01-12S15H		15	67	1.34	102		7	82	
MFPU01-12D05H		±5	±100	±2	104		7	100#	80
MFPU01-12D12H		±12	±42	±0.84	102		7		82
MFPU01-12D15H		±15	±33	±0.66	101		7		82

* Min. Output Current for Lower Load Regulation

For each output

Input Specifications					
Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	3.3V Input Models	2.97	3.3	3.63	VDC
	5V Input Models	4.5	5	5.5	
	12V Input Models	10.8	12	13.2	
Input Surge Voltage (1 sec. max.)	3.3V Input Models	-0.7	---	6	
	5V Input Models	-0.7	---	9	
	12V Input Models	-0.7	---	18	
Input Filter	All Models	Internal Capacitor			

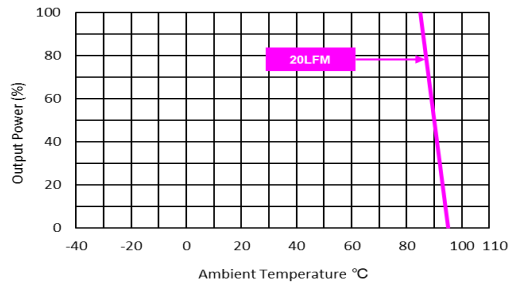
Output Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	---	±3.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.1	±1.0	%
Line Regulation	For Vin Change of 1%	---	±1.2	±1.5	%
Load Regulation	Io=10% to 100%	See Model Selection Guide			
Ripple & Noise	0-20 MHz Bandwidth	---	---	100	mV _{P-P}
Temperature Coefficient		---	±0.01	±0.02	%/°C
Over Load Protection	Normal Vin at 25°C	---	160	---	%
Short Circuit Protection	Continuous, Automatic Recovery				

General Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	3000	---	---	VDC
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100kHz, 1V	---	20	---	pF
Switching Frequency		50	80	110	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	3,589,000	---	---	Hours
Safety Approvals	UL/cUL 60950-1 recognition(UL certificate), IEC/EN 60950-1(CB-report)				
	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1(CB-report)				

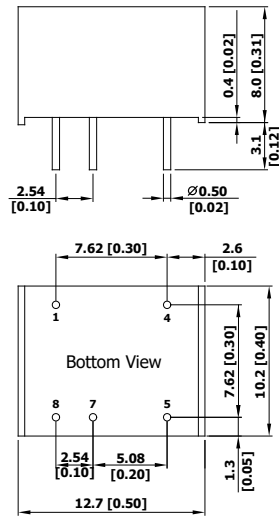
EMC Specifications				
Parameter	Standards & Level			Performance
EMI	Conduction	EN 55032	With external components	Class A ₍₅₎
	Radiation			
EMS	EN 55024			
	ESD	EN61000-4-2 Air ± 8kV , Contact ± 6kV		A
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient (6)	EN 61000-4-4 ±2kV		A
	Surge (6)	EN 61000-4-5 ±1kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
	PFMF	EN 61000-4-8 3A/m		A

Environmental Specifications

Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+90	°C
Case Temperature	---	+95	°C
Storage Temperature Range	-50	+125	°C
Humidity (non condensing)	---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)	---	260	°C

Power Derating Curve

Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a fast blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 To meet EN55032 Class A an external filter, please contact MINMAX.
- 6 To meet EN61000-4-4 & EN61000-4-5 an external capacitor across the input pins is required, please contact MINMAX.
- 7 Specifications are subject to change without notice.
- 8 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

Package Specifications
Mechanical Dimensions

Pin Connections

Pin	Single Output	Dual Output
1	-Vin	-Vin
4	+Vin	+Vin
5	+Vout	+Vout
7	-Vout	Common
8	No Pin	-Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pins ±0.05 (±0.002)

Physical Characteristics

Case Size	: 12.7x8.0x10.2mm (0.50x0.31x0.40 inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: Phosphor Bronze with Tin Plate Over Nickel Subplate
Weight	: 1.95g