


PIN	OUT
4	X1
3	Y1
2	X2
1	Y2

Notes:

1. Type: Film to Glass
2. Operating Voltage:  $\leq 10V$
3. Operation Temperature:  $-10^{\circ}C \sim 60^{\circ}C$   
Storage Temperature:  $-20^{\circ}C \sim 70^{\circ}C$
4. Life Time:  $> 1,000,000$  times
5. Connect Material: 8260
6. Response Time:  $\leq 10ms$
7. Linearity:  $\leq 1.5\%$
8. Transmittance:  $\geq 78.7\%$
9. Surface Hardness  $\geq 3H$  (pencil)
10. Operation force:  $80g \sim 120g$
11. Resistance: X:  $180 \Omega \sim 500 \Omega$   
Y:  $600 \Omega \sim 1180 \Omega$

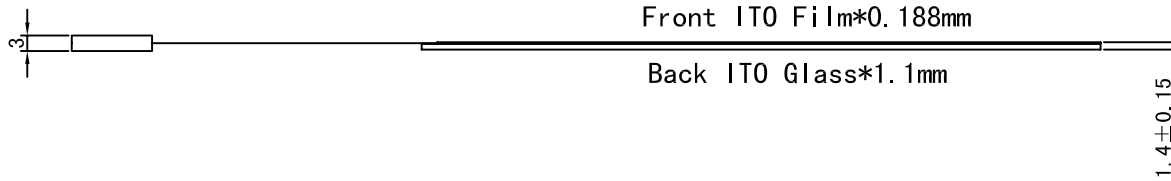

	MODEL NO.	DRAWN :	DATE :	VERSION :	UNIT :	TOLERANCE :	SCALE :	REV :
	W4048002			3.0	MM	$\pm 0.2$		