

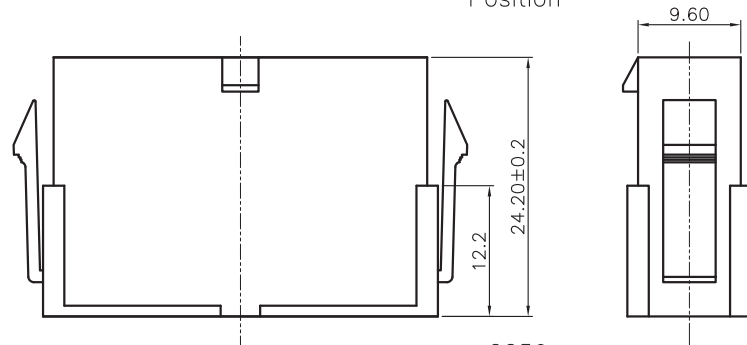


Part No	Wire Apply	A	B	C	D
2259T-16-XX	16AWG	3.6	4.5	2.3	2.7
2259T-1824-XX	18-24AWG	3.6	4.5	1.9	2.3
2259T-2228-XX	22-28AWG	2.3	2.3	1.8	1.65

2259T-XXXX-XX

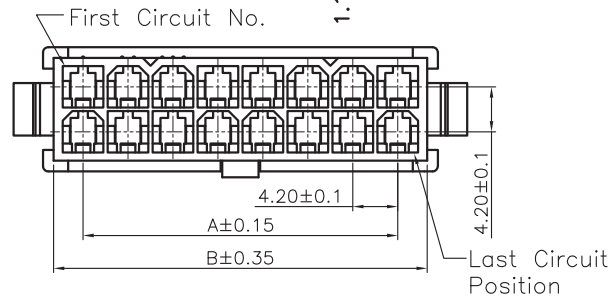

2259



Specifications:

Current Rating:9.0A AC/DC
 Voltage Rating:600V AC/DC
 Contact Resistance:10m Ohm. Max.
 Insulation Resistance:1000M Ohm. Min.
 Withstanding Voltage:1500V AC For One Minute
 Operating Temperature Range:-40°C To +105°C
 Material And Finish:

Insulator:Nylon 66 (UL94V-2)
 Insulator Color:Transparent White
 Contact:Brass
 Finish:Tin Plated


How To Order
 2259-XX

└── No. Of Positions
 └── Plug Housing

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2		5.50	14	25.20	30.70
4	4.20	9.70	16	29.40	34.90
6	8.40	13.90	18	33.60	39.10
8	12.60	18.10	20	37.80	43.30
10	16.80	22.30	22	42.00	47.50
12	21.00	26.50	24	46.20	51.70



RoHS Compliant

E				DRAWN: DAVID	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: 4.2mm Plug Housing	SIZE A4
D				CHECKED: Jeremy Liu				
C	20-DEC-2010	ECN-TW101204	Allen	APPROVAL: DAVID	UNIT: MM	PART NO: 2259-XX		
B	29-Oct-2007	ECN-CN071014	Zhou Lin		SCALE: 1:1			
A	12-APR-2005	(PC0040)	DAVID	APPROVAL: Mike Wu	SHEET: 1 / 2			
REV	DATE	FILE	BY		PROJECTION:			

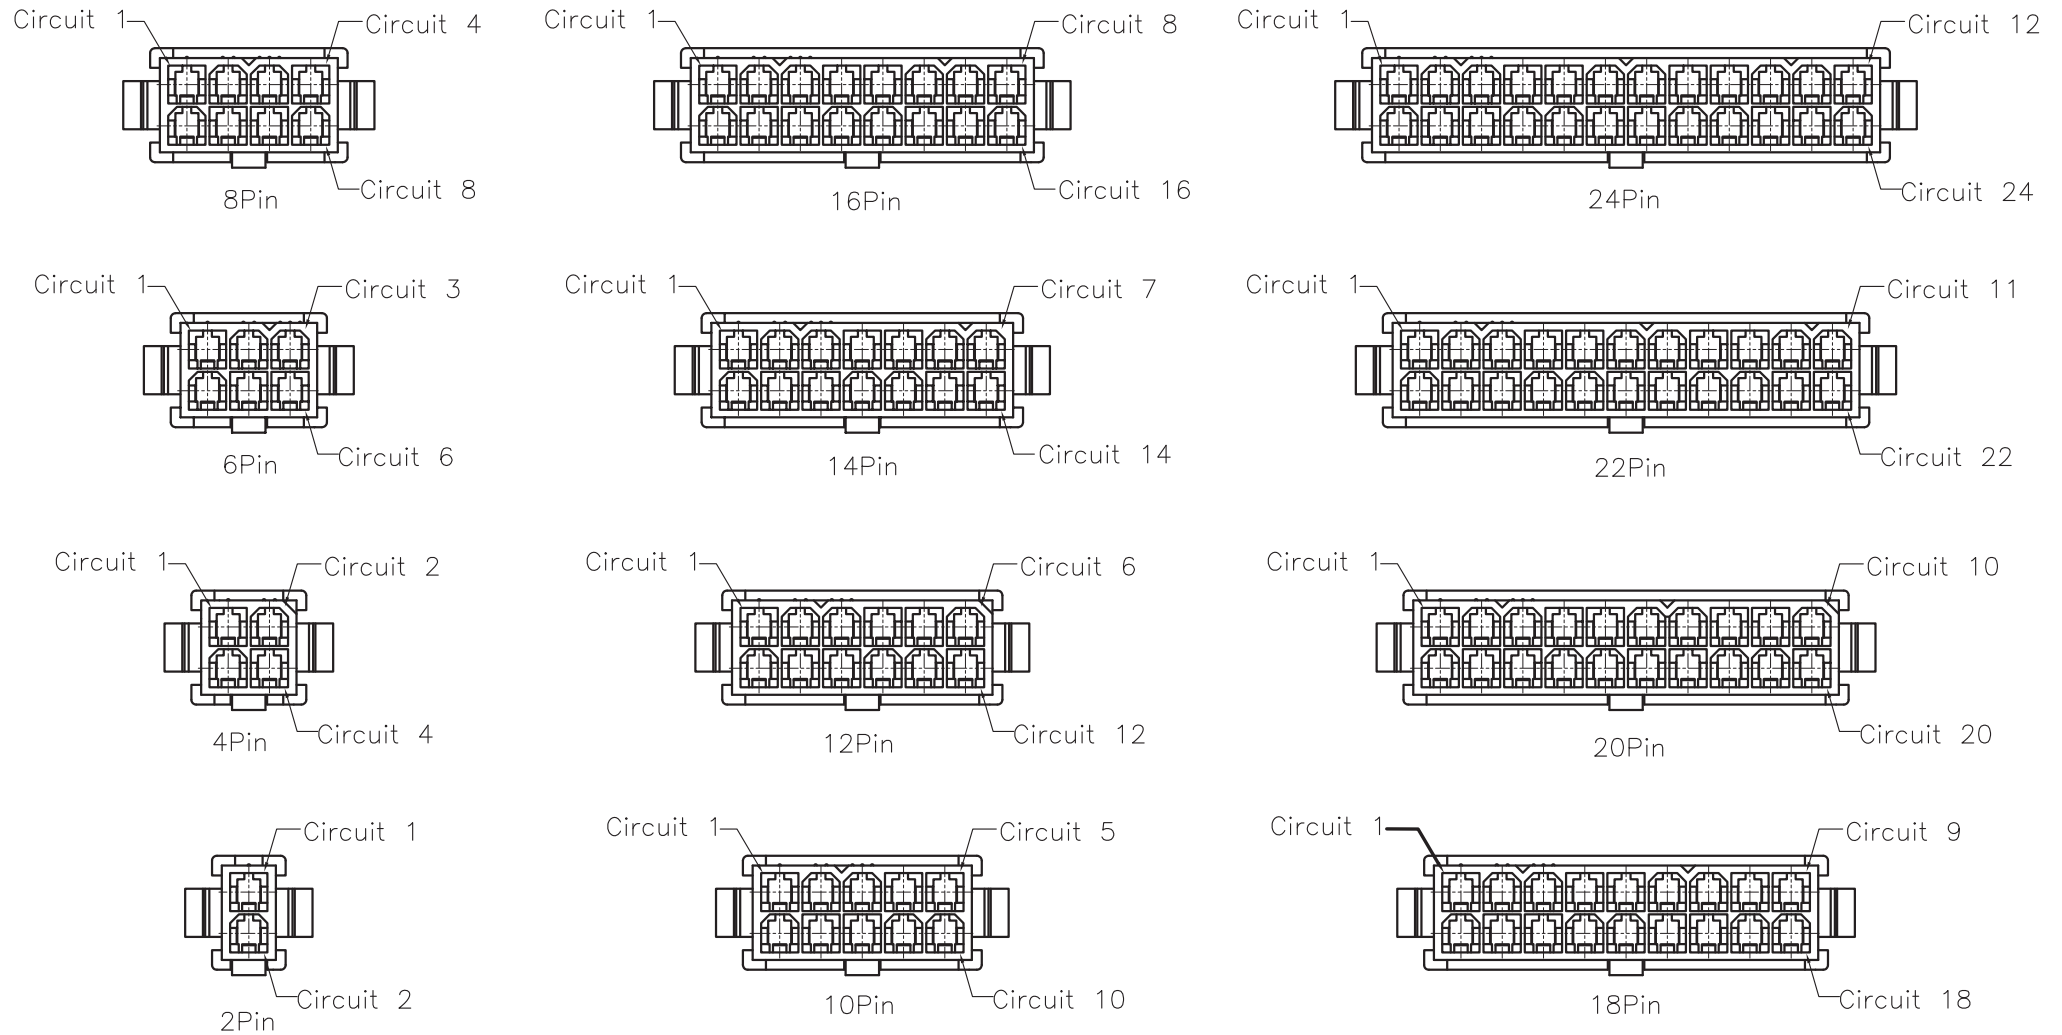

2~24P Protection Key Drawing(Ref.)

RoHS Compliant

E				DRAWN: DAVID	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: 4.2mm Power Housing Protection key Drawing	SIZE A4
D			CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: 4.2mm Power Housing Protection key Drawing			
C				APPROVAL: Mike Wu	SCALE: 1:1	PART NO: 2259-XX		
B	29-Oct-2007	ECN-CN071014	Zhou Lin		SHEET: 2 / 2			
A	12-APR-2005	(PC0040)	DAVID		PROJECTION: 			
REV	DATE	FILE	BY					