




△ SPECIFICATION
 Current Rating:2A AC/DC
 Voltage Rating:250V AC/DC
 Withstand Voltage:500V AC For 1 Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PBT+15%G.F.(UL94V-0),Black
 RoHS Compliant




△ PVF 1 X XX - H
 (1) (2) (3) (4)
△ (1) PVF:2.54mm PV FPC Series
(2) 1:Single Row
(3) XX:No. Of Position/Per Row
(4) H:RoHS Compliant

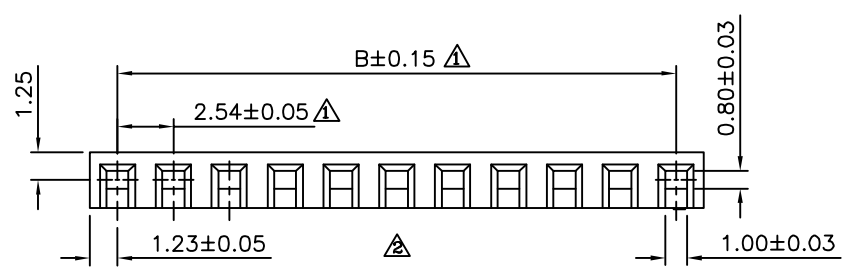



△ Detail D

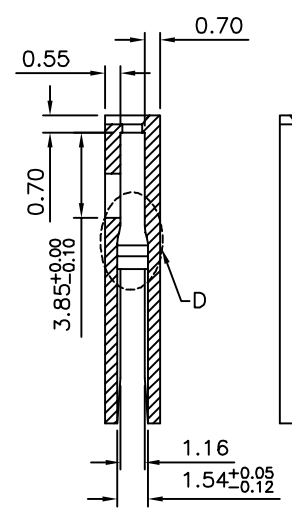

△ Section:A-A

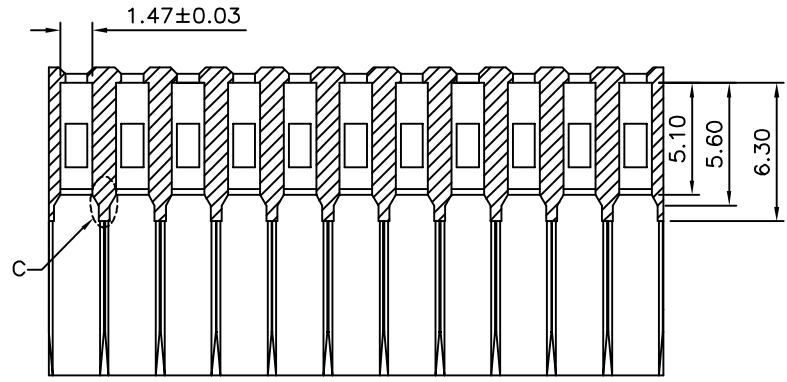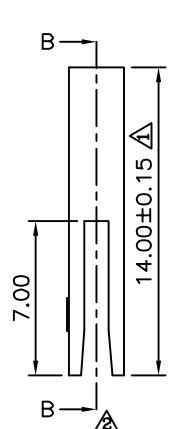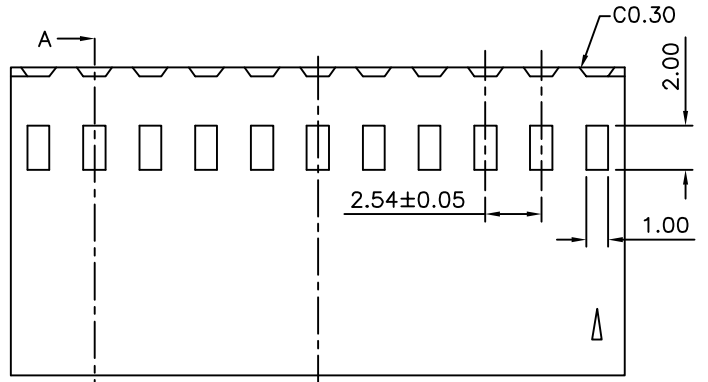

△ Section:B-B

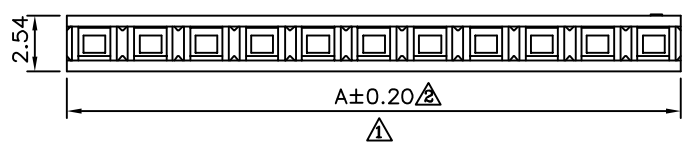

△ Detail C

Pin	A	B	Pin	A	B
2	5.04	2.54	9	22.82	20.32
3	7.58	5.08	10	25.36	22.86
4	10.12	7.62	11	27.90	25.40
5	12.66	10.16	12	30.44	27.94
6	15.20	12.70	13	32.98	30.48
7	17.74	15.24	14	35.52	33.02
8	20.28	17.78	15	38.06	35.56

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △.X ±0.15 .X* ±2* △.XX ±0.10 .XX* ±1* △.XXX ±0.05
PART No. PVF1XXX-H		EMILY		
DRAWING No. PVF1XXX-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY CYP		
REV.	A2	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	01/29/2015
△ A1		Modify Data	HZF	11/05/2011
△ A0		NEW RELEASE	HZF	04/04/2006