


Product: 压电无源插针蜂鸣器	YN-3027PA5
Technical Terms	
Resonant Frequency (KHZ)	2.5
Rated Voltage (V _{p-p})	5.0
Operating Voltage (V _{p-p})	3~24
Max. Current Consumption at Rated Voltage (mA)	2.0
Capacitance at 1000Hz (Pf)	26000±30%
Min. Sound Output at 10cm at Rated Voltage (dB)	≥90
Operating Temperature (°C)	-20~+70
Storage Temperature (°C)	-30~+80
Housing Material	PBT(Black)

Remark: At the same spec of material changed without notice to the enviromental protection , material sources and process improvement norms etc.

APPEARANCE DRAWING Tol : ± 0.5 Unit: mm

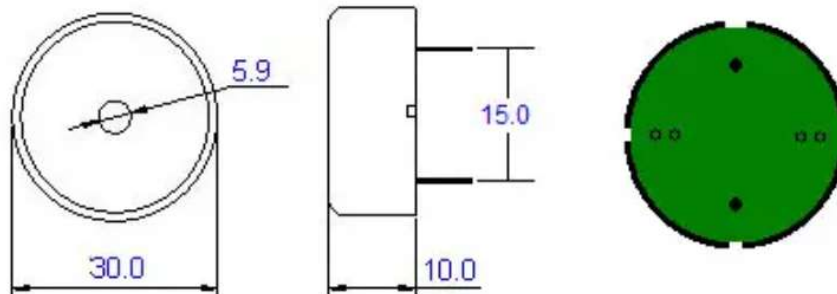

Mounting Type: Terminal wire connection

Description: ROHS High decibel piezo buzzers

Rated Voltage :24V

Frequenc : 2.5KHZ

Application: Household appliances, automobiles

Output Type : VOICE

Voltage Range : 3v-24v

Input Type : Power drive signal

Operating Mode Technology :External Driven passive buzzers

Size / Dimension : 30*10MM