


SECTION A-A




Electric Specifications
 Current Rating: 1.1Amps
 Rating Voltage: 250V AC
 Insulation Resistance: 100M Ohm Min At DC 500V
 Contact Resistance: 30m Ohm Max At DC 100m Amps
 Withstanding Voltage: 1 Minute At 750V r.m.s Min
 Temperature Range: -40°C~85°C

Materials:
 Insulator: High Temp. Plastic (Nylon 66 UL94V-V0)
 Insulator Color: Black
 Terminal: Copper Alloy
 Plating: Selective Gold Plated
 Fork: Spcc Nickel Plated

How To Order
 PCIEV10-64GX-PG-X4

- X4 Series
- PG: With Post
- Blank: Selective Gold 1u"
- G3: Selective Gold 3u"
- G5: Selective Gold 1u"
- G15: Selective Gold 15u"
- G30: Selective Gold 30u"
- No. of Positions
- Straight Dip Type

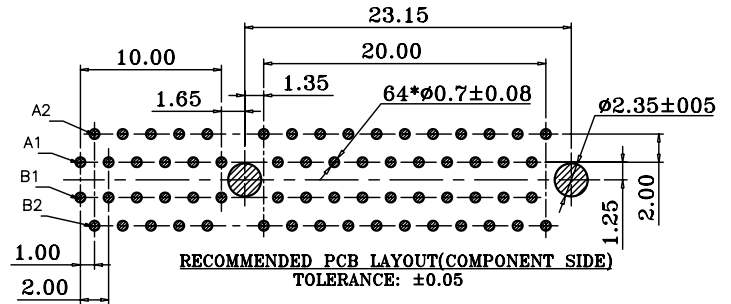

RoHS Compliant

				DRAWN: WGL	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15			SIZE A4
E				CHECKED: Jeremy Liu	UNIT: MM			
D				APPROVAL: Mike Wu	SCALE: 2:1	PART NO: PCIEV10-64GX-PG-X4		
C					SHEET: 1 / 1			
B				PROJECTION:				
A	04-Mar-2020	(PC0001)	WGL					
REV	DATE	FILE	BY					

A

B

C

D