

MM54HC354/MM74HC354/ MM54HC356/MM74HC356 8-Channel TRI-STATE® Multiplexers with Latches

General Description

The MM54HC354/MM74HC354 and MM54HC356/MM74HC356 utilize advanced silicon-gate CMOS technology. They exhibit the high noise immunity and low power dissipation of standard CMOS integrated circuits, along with the ability to drive 15 LS-TTL loads. Due to the large output drive capability and the TRI-STATE feature, these devices are ideally suited for interfacing with bus lines in a bus organized system.

These data selectors/multiplexers contain full on-chip binary decoding to select one of eight data sources. The data select address is stored in transparent latches that are enabled by a low level address on pin 11, \overline{SC} . Data on the 8 input lines is stored in a parallel input/output register which in the MM54HC354/MM74HC354 is composed of 8 transparent latches enabled by a low level on pin 9, \overline{DC} , and in the MM54HC356/MM74HC356 is composed of 8 edge-triggered flip-flops, clocked by a low to high transition on pin 9, CLK. Both true (Y) and complementary (W) TRI-STATE outputs are available on both devices.


The 54HC/74HC logic family is functionally as well as pin-out compatible with the standard 54LS/74LS-TTL logic family. All inputs are protected from damage due to static discharge by internal diode clamps to V_{CC} and ground.

Features

- Transparent latches on data select inputs
- Choice of data registers:
 - Transparent ('354)
 - Edge-triggered ('356)
- TRI-STATE complementary outputs with fanout of 15 LS-TTL loads
- Typical propagation delay:
 - Data to output ('354): 32 ns
 - Clock to output ('346): 35 ns
- Wide power supply range: 2V–6V
- Low quiescent supply current: 80 μ A maximum
- Low input current: 1 μ A maximum

MM54HC354/MM74HC354/MM54HC356/MM74HC356
8-Channel TRI-STATE Multiplexers with Latches

Connection Diagram

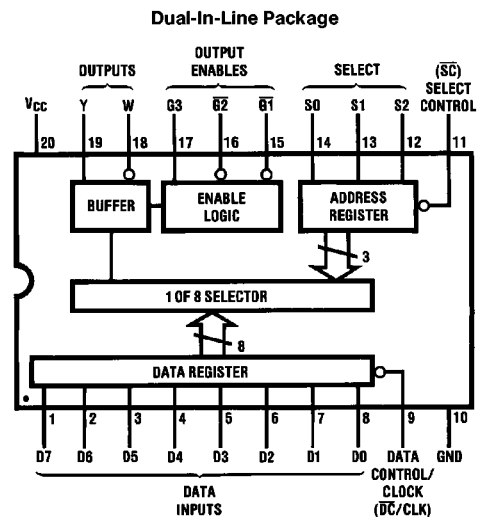

TL/F/5208-1

Order Number MM54HC354/356 or MM74HC354/356

TRI-STATE® is a registered trademark of National Semiconductor Corporation.

Absolute Maximum Ratings (Notes 1 & 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V_{CC})	-0.5V to +7.0V
DC Input Voltage (V_{IN})	-1.5V to $V_{CC} + 1.5V$
DC Output Voltage (V_{OUT})	-0.5V to $V_{CC} + 0.5V$
Clamp Diode Current (I_{CD})	± 20 mA
DC Output Current, per pin (I_{OUT})	± 35 mA
DC V_{CC} or GND Current, per pin (I_{CC})	± 70 mA
Storage Temperature Range (T_{STG})	-65°C to +150°C
Power Dissipation (P_D)	
(Note 3)	600 mW
S.O. Package only	500 mW
Lead Temp. (T_L)	
(Soldering 10 seconds)	260°C

Operating Conditions

	Min	Max	Units
Supply Voltage (V_{CC})	2	6	V
DC Input or Output Voltage (V_{IN}, V_{OUT})	0	V_{CC}	V
Operating Temp. Range (T_A)			
MM74HC	-40	+85	°C
MM54HC	-55	+125	°C
Input Rise or Fall Times (t_r, t_f)			
$V_{CC} = 2.0V$		1000	ns
$V_{CC} = 4.5V$		500	ns
$V_{CC} = 6.0V$		400	ns

DC Electrical Characteristics (Note 4)

Symbol	Parameter	Conditions	V_{CC}	$T_A = 25^\circ C$			Units	
				Typ	74HC $T_A = -40$ to $85^\circ C$	54HC $T_A = -55$ to $125^\circ C$		
V_{IH}	Minimum High Level Input Voltage		2.0V		1.5	1.5	V	
			4.5V		3.15	3.15	V	
			6.0V		4.2	4.2	V	
V_{IL}	Maximum Low Level Input Voltage**		2.0V		0.5	0.5	V	
			4.5V		1.35	1.35	V	
			6.0V		1.8	1.8	V	
V_{OH}	Minimum High Level Output Voltage	$V_{IN} = V_{IH}$ or V_{IL} $ I_{OUT} \leq 20 \mu A$	2.0V	2.0	1.9	1.9	V	
			4.5V	4.5	4.4	4.4	V	
			6.0V	6.0	5.9	5.9	V	
		$V_{IN} = V_{IH}$ or V_{IL} $ I_{OUT} \leq 6.0$ mA $ I_{OUT} \leq 7.8$ mA	4.5V	4.2	3.98	3.84	3.7	V
			6.0V	5.7	5.48	5.34	5.2	V
V_{OL}	Maximum Low Level Output Voltage	$V_{IN} = V_{IH}$ or V_{IL} $ I_{OUT} < 20 \mu A$	2.0V	0	0.1	0.1	V	
			4.5V	0	0.1	0.1	V	
			6.0V	0	0.1	0.1	V	
		$V_{IN} = V_{IH}$ or V_{IL} $ I_{OUT} \leq 6.0$ mA $ I_{OUT} \leq 7.8$ mA	4.5V	0.2	0.26	0.33	0.4	V
			6.0V	0.2	0.26	0.33	0.4	V
I_{IN}	Maximum Input Current	$V_{IN} = V_{CC}$ or GND	6.0V		± 0.1	± 1.0	μA	
I_{OZ}	Maximum TRI-STATE Output Leakage Current	$V_{OUT} = V_{CC}$ or GND $\bar{G}1 = V_{IH}$	6.0V		± 0.5	± 5.0	μA	
I_{CC}	Maximum Quiescent Supply Current	$V_{IN} = V_{CC}$ or GND $I_{OUT} = 0 \mu A$	6.0V		8.0	80	μA	

Note 1: Maximum Ratings are those values beyond which damage to the device may occur.

Note 2: Unless otherwise specified all voltages are referenced to ground.

Note 3: Power Dissipation temperature derating — plastic "N" package: -12 mW/°C from 65°C to 85°C; ceramic "J" package: -12 mW/°C from 100°C to 125°C.

Note 4: For a power supply of 5V $\pm 10\%$ the worst case output voltages (V_{OH} and V_{OL}) occur for HC at 4.5V. Thus the 4.5V values should be used when designing with this supply. Worst case V_{IH} and V_{IL} occur at $V_{CC} = 5.5V$ and 4.5V respectively. (The V_{IH} value at 5.5V is 3.85V.) The worst case leakage current (I_{IN} , I_{CC} , and I_{OZ}) occur for CMOS at the higher voltage and so the 6.0V values should be used.

** V_{IL} limits are currently tested at 20% of V_{CC} . The above V_{IL} specification (30% of V_{CC}) will be implemented no later than Q1, CY'89.

AC Electrical Characteristics $V_{CC}=5V, T_A=25^{\circ}C, t_r=t_f=6\text{ ns}$

MM54HC354/MM74HC354

Symbol	Parameter	Conditions	Typ	Guaranteed Limit	Units
t_{PHL}, t_{PLH}	Maximum Propagation Delay D0–D7 to either Output	$C_L = 45\text{ pF}$	32	46	ns
t_{PHL}, t_{PLH}	Maximum Propagation Delay \overline{DC} to either Output	$C_L = 45\text{ pF}$	38	53	ns
t_{PHL}, t_{PLH}	Maximum Propagation Delay S0–S2 to either Output	$C_L = 45\text{ pF}$	40	56	ns
t_{PHL}, t_{PLH}	Maximum Propagation Delay \overline{SC} to either Output	$C_L = 45\text{ pF}$	42	58	ns
t_{PZH}, t_{PZL}	Maximum Output Enable Time	$R_L = 1\text{ k}\Omega$ $C_L = 45\text{ pF}$	17	24	ns
t_{PHZ}, t_{PLZ}	Maximum Output Disable Time	$R_L = 1\text{ k}\Omega$ $C_L = 5\text{ pF}$	23	32	ns
t_S	Minimum Setup Time D0–D7 to \overline{DC} , S0–S2 to \overline{SC}		3	10	ns
t_H	Minimum Hold Time D0–D7 to \overline{DC} , S0–S2 to \overline{SC}		0	5	ns
t_W	Minimum Pulse Width, \overline{SC} or \overline{DC}		10	15	ns

MM54HC356/MM74HC356

Symbol	Parameter	Conditions	Typ	Guaranteed Limit	Units
t_{PHL}, t_{PLH}	Maximum Propagation Delay CLK to either Output	$C_L = 45\text{ pF}$	35	50	ns
t_{PHL}, t_{PLH}	Maximum Propagation Delay S0–S2 to either Output	$C_L = 45\text{ pF}$	40	56	ns
t_{PHL}, t_{PLH}	Maximum Propagation Delay \overline{SC} to either Output	$C_L = 45\text{ pF}$	42	58	ns
t_{PZH}, t_{PZL}	Maximum Output Enable Time	$R_L = 1\text{ k}\Omega$ $C_L = 45\text{ pF}$	17	24	ns
t_{PHZ}, t_{PLZ}	Maximum Output Disable Time	$R_L = 1\text{ k}\Omega$ $C_L = 5\text{ pF}$	23	32	ns
t_S	Minimum Setup Time D0–D7 to CLK, S0–S2 to \overline{SC}		3	10	ns
t_H	Minimum Hold Time D0–D7 to CLK, S0–S2 to \overline{SC}		0	5	ns
t_W	Minimum Pulse Width, \overline{SC} or CLK		10	15	ns

AC Electrical Characteristics MM54HC354/MM74HC354 (Continued)

$V_{CC}=2.0-6.0V$, $C_L=50\text{ pF}$, $t_r=t_f=6\text{ ns}$ (unless otherwise specified)

Symbol	Parameter	Conditions	V_{CC}	$T_A = 25^\circ\text{C}$		74HC	54HC	Units
						$T_A = -40\text{ to }85^\circ\text{C}$	$T_A = -55\text{ to }125^\circ\text{C}$	
				Typ	Guaranteed Limits			
t_{PHL} , t_{PLH}	Maximum Propagation Delay D0–D7 to either Output	$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	2.0V	90	235	294	352	ns
			2.0V	100	275	344	412	ns
		$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	4.5V	35	47	59	70	ns
			4.5V	40	55	68	83	ns
t_{PHL} , t_{PLH}	Maximum Propagation Delay DC to either Output	$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	2.0V	115	270	337	405	ns
			2.0V	125	310	387	465	ns
		$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	4.5V	40	54	68	82	ns
			4.5V	46	62	78	93	ns
t_{PHL} , t_{PLH}	Maximum Propagation Delay S0–S2 to either Output	$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	2.0V	120	285	356	427	ns
			2.0V	130	325	406	488	ns
		$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	4.5V	42	57	71	86	ns
			4.5V	50	65	81	97	ns
t_{PHL} , t_{PLH}	Maximum Propagation Delay SC to either Output	$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	2.0V	120	300	375	450	ns
			2.0V	110	340	425	510	ns
		$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	4.5V	45	60	75	90	ns
			4.5V	52	68	85	102	ns
t_{PZH} , t_{PZL}	Maximum Output Enable Time	$R_L = 1\text{ k}\Omega$ $C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	2.0V	50	125	156	188	ns
			2.0V	60	165	206	248	ns
		$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	4.5V	18	25	31	38	ns
			4.5V	25	33	41	49	ns
t_{PHZ} , t_{PLZ}	Maximum Output Disable Time	$R_L = 1\text{ k}\Omega$ $C_L = 50\text{ pF}$	2.0V	68	165	206	248	ns
			4.5V	24	33	41	49	ns
		$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	6.0V	20	28	35	42	ns
			6.0V	42	58	72	87	ns
t_S	Minimum Setup Time D0–D7 to DC, S0–S2 to SC		2.0V	6	50	60	75	ns
			4.5V	3	10	13	15	ns
			6.0V	3	10	13	15	ns
t_H	Minimum Hold Time D0–D7 to DC, S0–S2 to SC		2.0V	0	5	5	5	ns
			4.5V	0	5	5	5	ns
			6.0V	0	5	5	5	ns
t_W	Minimum Pulse Width SC or DC		2.0V	30	80	100	120	ns
			4.5V	10	16	20	24	ns
			6.0V	10	15	18	20	ns
t_{TLH} , t_{THL}	Maximum Output Rise and Fall Time	$C_L = 50\text{ pF}$	2.0V	25	60	75	90	ns
			4.5V	7	12	15	18	ns
			6.0V	6	10	13	15	ns
C_{PD}	Power Dissipation Capacitance (Note 5)	(per package) Active TRI-STATE		150 50				pF pF
C_{IN}	Maximum Input Capacitance			5	10	10	10	pF
C_{OUT}	Maximum Output Capacitance			15	20	20	20	pF

Note 5: C_{PD} determines the no load dynamic power consumption, $P_D = C_{PD} V_{CC}^2 f + I_{CC} V_{CC}$, and the no load dynamic current consumption, $I_S = C_{PD} V_{CC} f + I_{CC}$.

AC Electrical Characteristics MM54HC356/MM74HC356 (Continued)

$V_{CC} = 2.0-6.0V$, $C_L = 50\text{ pF}$, $t_r = t_f = 6\text{ ns}$ (unless otherwise specified)

Symbol	Parameter	Conditions	V_{CC}	$T_A = 25^\circ\text{C}$		74HC	54HC	Units
						$T_A = -40\text{ to }85^\circ\text{C}$	$T_A = -55\text{ to }125^\circ\text{C}$	
				Typ	Guaranteed Limits			
t_{PHL} , t_{PLH}	Maximum Propagation Delay CLK to either Output	$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	2.0V	100	225	318	338	ns
			2.0V	110	295	369	442	ns
		$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	4.5V	36	51	63	76	ns
			4.5V	42	59	73	90	ns
t_{PHL} , t_{PLH}	Maximum Propagation Delay S0-S2 to either Output	$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	2.0V	120	285	356	427	ns
			2.0V	130	325	406	488	ns
		$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	4.5V	42	57	71	86	ns
			4.5V	50	65	81	97	ns
t_{PHL} , t_{PLH}	Maximum Propagation Delay \overline{SC} to either Output	$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	2.0V	120	300	375	450	ns
			2.0V	110	340	425	510	ns
		$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	4.5V	45	60	75	90	ns
			4.5V	52	68	85	102	ns
t_{PHZ} , t_{PLZ}	Maximum Output Enable Time	$R_L = 1\text{ k}\Omega$ $C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	2.0V	50	125	156	188	ns
			2.0V	60	165	206	248	ns
		$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	4.5V	18	25	31	38	ns
			4.5V	25	33	41	49	ns
t_{PHZ} , t_{PLZ}	Maximum Output Disable Time	$R_L = 1\text{ k}\Omega$ $C_L = 50\text{ pF}$	2.0V	68	165	206	248	ns
			4.5V	24	33	41	49	ns
		$C_L = 50\text{ pF}$ $C_L = 150\text{ pF}$	6.0V	20	28	35	42	ns
			6.0V	21	28	35	42	ns
t_S	Minimum Setup Time D0-D7 to CLK, S0-S2 to \overline{SC}		2.0V	6	50	60	75	ns
			4.5V	3	10	13	15	ns
			6.0V	3	10	13	15	ns
t_H	Minimum Hold Time D0-D7 to CLK, S0-S2 to \overline{SC}		2.0V	0	5	5	5	ns
			4.5V	0	5	5	5	ns
			6.0V	0	5	5	5	ns
t_W	Minimum Pulse Width \overline{SC} to CLK		2.0V	30	80	100	120	ns
			4.5V	10	16	20	24	ns
			6.0V	10	15	18	20	ns
t_r , t_f	Maximum Clock Input Rise and Fall Time		2.0V		1000	1000	1000	ns
			4.5V		500	500	500	ns
			6.0V		400	400	400	ns
t_{TLH} , t_{THL}	Maximum Output Rise and Fall Time	$C_L = 50\text{ pF}$	2.0V	25	60	75	90	ns
			4.5V	7	12	15	18	ns
			6.0V	6	10	13	15	ns
C_{PD}	Power Dissipation Capacitance (Note 5)	(per package) Active TRI-STATE		150				pF
				50				pF
C_{IN}	Maximum Input Capacitance			5	10	10	10	pF
C_{OUT}	Maximum Output Capacitance			15	20	20	20	pF

Note 5: C_{PD} determines the no load dynamic power consumption, $P_D = C_{PD} V_{CC}^2 f + I_{CC} V_{CC}$, and the no load dynamic current consumption, $I_S = C_{PD} V_{CC} f + I_{CC}$.

Function Table

Select†			Inputs				Outputs		
S1	S2	S0	Data Control 'HC354 \overline{DC}	Clock 'HC356 CLK	Output Enables $\overline{G1}$ $\overline{G2}$ G3			W	Y
X	X	X	X	X	H	X	X	Z	Z
X	X	X	X	X	X	H	X	Z	Z
X	X	X	X	X	X	X	L	Z	Z
L	L	L	L	↑	L	L	H	$\overline{D0}$	D0
L	L	L	H	H or L	L	L	H	$\overline{D0_n}$	D0 _n
L	L	H	L	↑	L	L	H	$\overline{D1}$	D1
L	L	H	H	H or L	L	L	H	$\overline{D1_n}$	D1 _n
L	H	L	L	↑	L	L	H	$\overline{D2}$	D2
L	H	L	H	H or L	L	L	H	$\overline{D2_n}$	D2 _n
L	H	H	L	↑	L	L	H	$\overline{D3}$	D3
L	H	H	H	H or L	L	L	H	$\overline{D3_n}$	D3 _n
H	L	L	L	↑	L	L	H	$\overline{D4}$	D4
H	L	L	H	H or L	L	L	H	$\overline{D4_n}$	D4 _n
H	L	H	L	↑	L	L	H	$\overline{D5}$	D5
H	L	H	H	H or L	L	L	H	$\overline{D5_n}$	D5 _n
H	H	L	L	↑	L	L	H	$\overline{D6}$	D6
H	H	L	H	H or L	L	L	H	$\overline{D6_n}$	D6 _n
H	H	H	L	↑	L	L	H	$\overline{D7}$	D7
H	H	H	H	H or L	L	L	H	$\overline{D7_n}$	D7 _n

H = high level (steady state)

L = low level (steady state)

X = irrelevant (any input, including transitions)

Z = high-impedance state (off state)

↑ = transition from low to high level


D0...D7 = the level steady-state inputs at inputs D0 through D7, respectively, at the time of the low-to-high clock transition in the case of 'HC356

D0_n...D7_n = the level of steady state inputs at inputs D0 through D7, respectively, before the most recent low-to-high transition of data control or clock.


†This column shows the input address set-up with \overline{SC} low.

Logic Diagram

'HC356

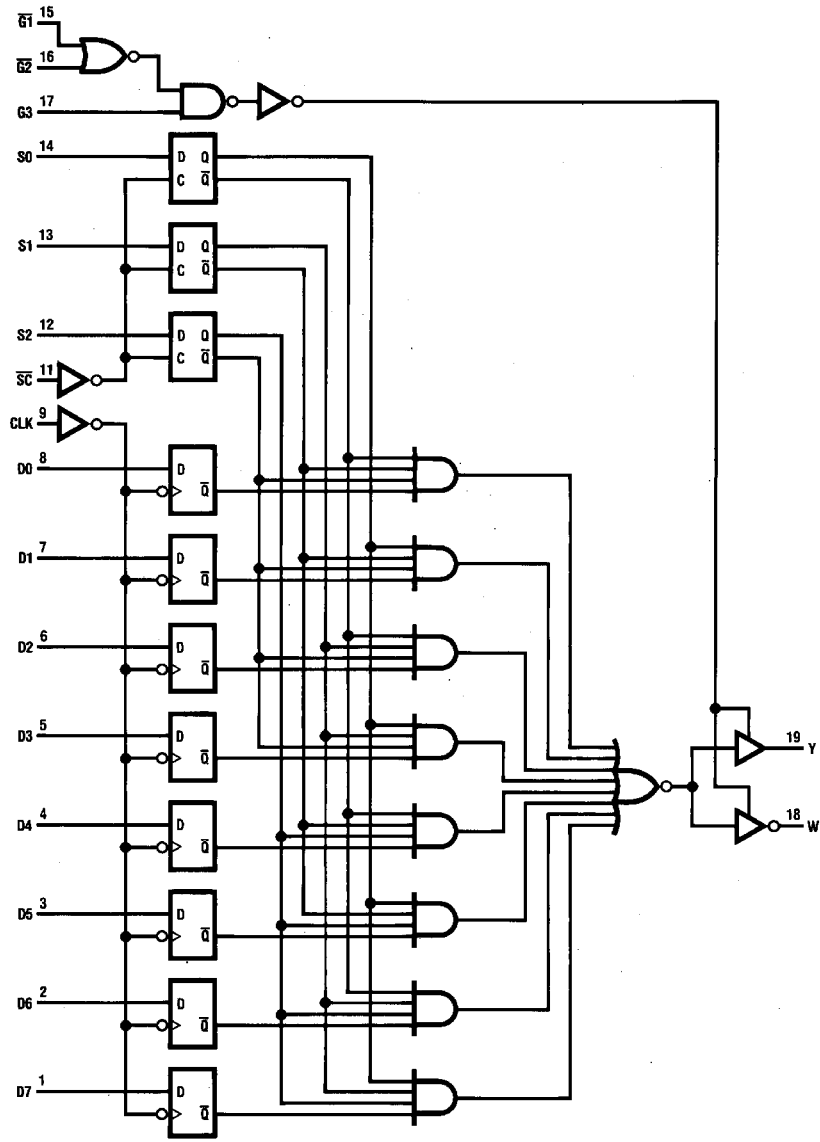


TL/F/5208-3




**MM54HC354/MM74HC354/MM54HC356/MM74HC356
8-Channel TRI-STATE Multiplexers with Latches**

Physical Dimensions inches (millimeters)

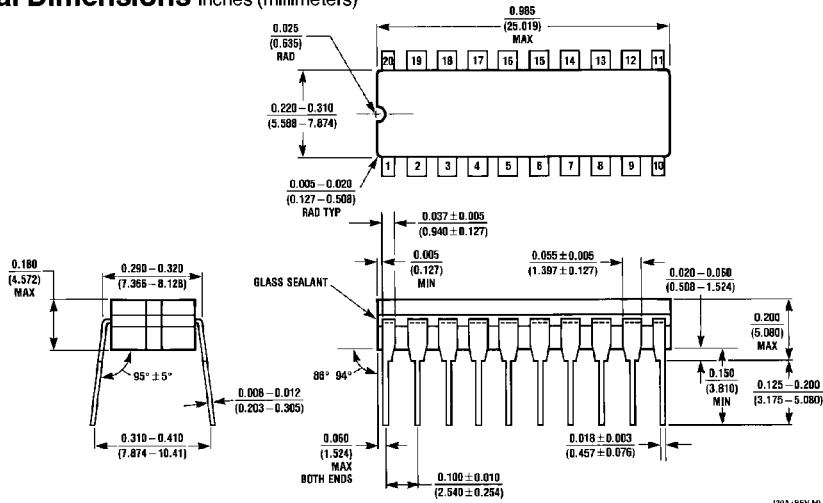

J20A (REV M)

Ceramic Dual-In-Line Package (J)
Order Number MM54HC354J, MM54HC356J, MM74HC354J or MM74HC356J
NS Package Number J20A

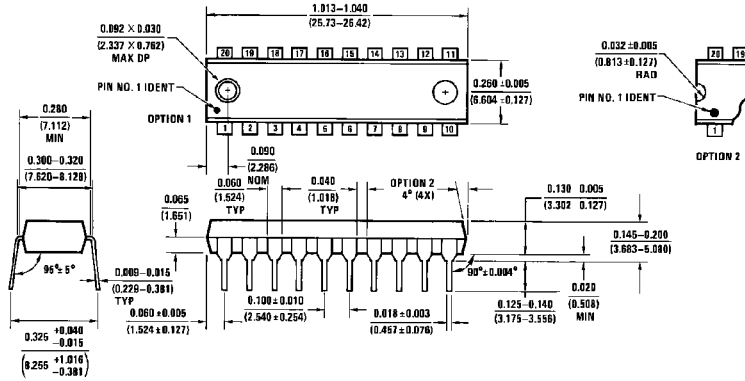

N20A (REV G)

Molded Dual-In-Line Package (N)
Order Number MM74HC354N or MM74HC356N
NS Package Number N20A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.