

BL2004FBY01



[Applications]: Instruments, intelligent three-meter, reversing radar, audio amplifier, electronic scale, electronic clock and other electronic products

[Electronic characteristics]: Working current: 30 mA

Working voltage: 4.5V-5.5V

Luminous color: white, green, blue, red, yellow, colorful, etc.

Luminous brightness: 50-400lm/m²

Uniformity of illumination: full surface brightness error ≤ 10

Welding temperature: 260 ° C 5 seconds

Life expectancy: 5-10 million hours

[Mechanical characteristics]: Dimensions: According to customer requirements

Thickness: 2mm


Tolerance: +/- 0.2mm

[Environmental parameters]: Operating temperature: -40 ° C ~ +80 ° C

Storage temperature: -40 ° C ~ +80 ° C

[Product category]: LED bottom backlight, LED side backlight, EL backlight, CCFL backlight

※ Various colors, shapes, backlights of various sizes and thicknesses can be customized according to customer requirements.

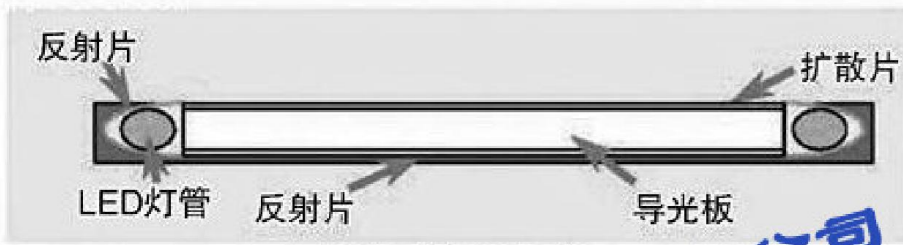

侧边式排列方式

深圳昌显科技有限公司



直下式排列方式

