



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/29/05'		

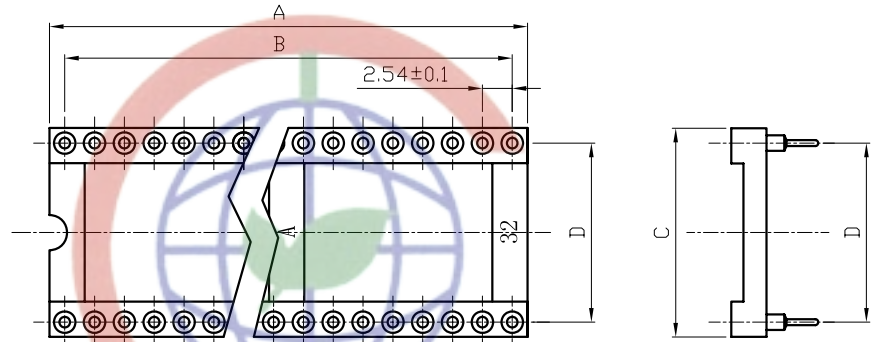


- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - CONTACT RESISTANCE: 20mΩ Max.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
    - INSULATION RESISTANCE: 1000MΩ Min.
  - ENVIRONMENT CHARACTERISTICS:
    - OPERATING TEMPERATURE: 0°C~+85°C.
    - STORAGE TEMPERATURE: -20°C~+70°C.
  - PART NUMBER: DS1001-01
  - PRODUCT NUMBER CODE:  
DS1001-01 - X X X X X X X

L CENTRAL SUPPORT  
 S: W/ CENTRAL SUPPORT  
 X: W/o CENTRAL SUPPORT  
 CLIP PLATING  
 F6: Full 3u" gold  
 T1: Full Tin  
 HOUSING MATERIAL  
 S: PBT  
 WIDTH  
 N: 7.62mm(06-24P)  
 W: 15.24mm(24-40P)  
 PIN PLATING  
 T1: Full Tin  
 8: Full GOLD FLASH  
 CLIP TYPE  
 B: 4 FINGERS  
 No.OF CONTACTS  
 06 08 14 16 18  
 20 24 28 32 40  
 SERIES No.  
 DS1001-01

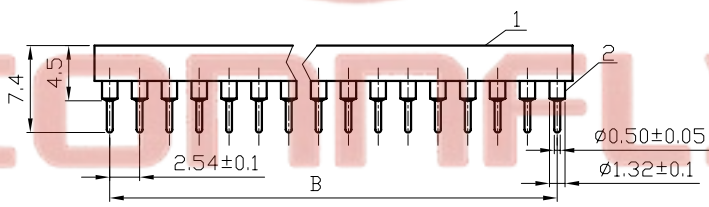

Position	Dimension			
	A±0.5	B±0.3	C	D±0.2
06	7.62	5.08	10.16	7.62
08	10.16	7.62	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
28	35.56	33.02	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	17.78	15.24
32	40.64	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24

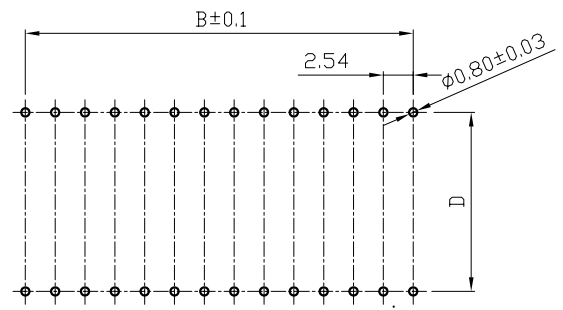

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5'	mm	DIP IC SOCKET PITCH2.54mm(0.100")
.X	±0.38	.X	±3'	mm	
.XX	±0.25	.XX	±2'	mm	
UNITS				SHEET SIZE	
mm				A4	
SHEET SIZE				SERIES	
A4				DS1001-01 SERIES	
<b>晨翔电子有限公司</b> <b>CONNFly CONNFly ELECTRONIC CO. LTD</b>					

2	CONTACT		COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1 SHEET 1 OF 1
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1001-01 - XXXXXXX

Tel: 86-574-63508787  
 Fax: 86-574-63510817  
 Email: sales@cnng.com.cn  
 Http://www.cnng.com.cn

Add: West Xuhou Road, Cui Ling, Ningbo, China  
 Tel: 86-574-6351321