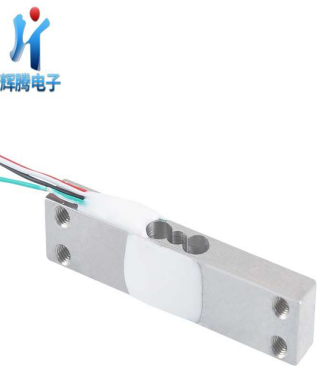
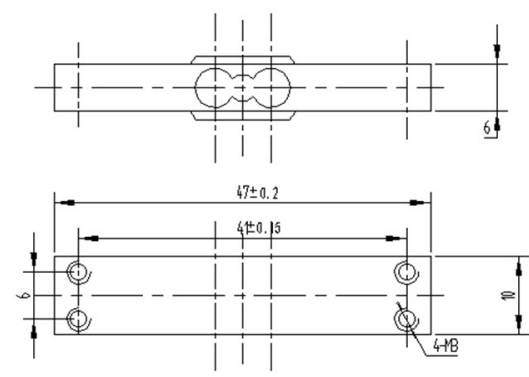



产品型号 & 图片	量程	精度	产品参数	包装说明	适用产品												
型号:i2000			TECHNICAL PARAMETER <b>技术参数</b>														
	500g (universal between 300- 500kg)	0.01g	<b>CZL-i2000传感器技术参数</b> <table border="1"> <tr> <td>1、量程: 2kg</td> <td>7、零点输出: -0.15~+0.05mV/V</td> </tr> <tr> <td>2、输出灵敏度: 1±0.2mV/V</td> <td>8、输出阻抗: 1000±10欧姆/P</td> </tr> <tr> <td>3、非线性: 0.03%F.S</td> <td>9、安全过载: 150%</td> </tr> <tr> <td>4、滞后: 0.03%F.S</td> <td>10、温度灵敏度漂移: 0.03%F.S/10°C</td> </tr> <tr> <td>5、重复性: 0.03%F.S</td> <td>11、零点温飘: 0.3%F.S/10°C</td> </tr> <tr> <td>6、蠕变: 0.05%F.S/3min</td> <td></td> </tr> </table> 	1、量程: 2kg	7、零点输出: -0.15~+0.05mV/V	2、输出灵敏度: 1±0.2mV/V	8、输出阻抗: 1000±10欧姆/P	3、非线性: 0.03%F.S	9、安全过载: 150%	4、滞后: 0.03%F.S	10、温度灵敏度漂移: 0.03%F.S/10°C	5、重复性: 0.03%F.S	11、零点温飘: 0.3%F.S/10°C	6、蠕变: 0.05%F.S/3min		1. Packing quantity: 1000Pcs/carton 2. Outer box size: 40*16.5*26cm 3. Gross weight/carton: 22kg	APPLICATION RANGE <b>应用产品</b> 
1、量程: 2kg	7、零点输出: -0.15~+0.05mV/V																
2、输出灵敏度: 1±0.2mV/V	8、输出阻抗: 1000±10欧姆/P																
3、非线性: 0.03%F.S	9、安全过载: 150%																
4、滞后: 0.03%F.S	10、温度灵敏度漂移: 0.03%F.S/10°C																
5、重复性: 0.03%F.S	11、零点温飘: 0.3%F.S/10°C																
6、蠕变: 0.05%F.S/3min																	
	2000g (universal for 1-2kg)	0.1g			<b>100g-2kg珠宝秤</b>												