



Specifications:

Current Rating:13.0 Amps
 Voltage Rating:600V AC/DC
 Contact Resistance:20m Ohm Max
 Insulator Resistance:1000M Ohm Min
 Withstanding Voltage: 5000V AC/minute
 Operating Temperature Range:-55°C~+105°C
 Material:
 Plastic:Nylon 66 (UL94V-2)
 Contacts:Brass
 Plating:TIN Plated
 Wire range: #16~#22

How To Order

9635R-XX

— No. Of Postions
 R:Receptacle

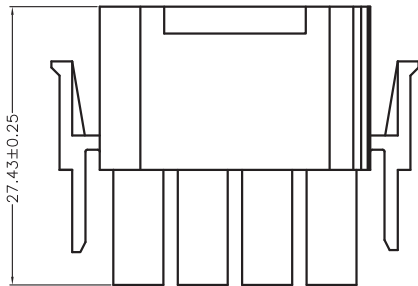

Dimension:

Circuits	Dim.A±0.25	Dim.B±0.15	Dim.C±0.25	Dim.D±0.15
2	13.97	6.35	—	14.73
3	20.32	12.70	—	14.73
4	26.67	19.05	—	14.73
5	33.02	25.40	—	14.73
6	13.97	6.35	12.70	27.43
7	45.72	38.10	—	14.73
8	52.07	44.45	—	14.73
9	20.32	12.70	12.70	27.43
10	64.77	57.15	—	14.73
12	26.67	19.05	12.70	27.43
15	33.02	25.40	12.70	27.43

RoHS Compliant

REV	DATE	FILE	BY	DRAWN:	CHECKED:	APPROVAL:	GENERAL TOLERANCE:	UNIT: MM	SCALE:1:1	SHEET: 1 / 1	PROJECTION:	DESCRIPTION:	PART NO:	SIZE
E				Sea			.X=±0.20 .XX=±0.15					繼德工業股份有限公司 Neltron Industrial Co., Ltd.	.250"(6.35mm) Power Receptacle	A4
D				Jeremy Liu										
C														
B														
A	22-Mar-2007	(PC0001)	Sea											
REV	DATE	FILE	BY			MIKE WU							9635R-XX	

1


2

3


4

5


Material:
Nylon 66 (UL94V-2)
Color:
White




9635R-02




9635R-03








9635R-04




9635R-05




9635R-07

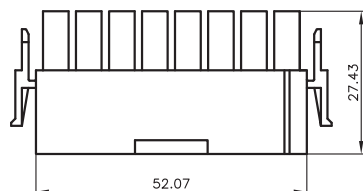


9635R-08

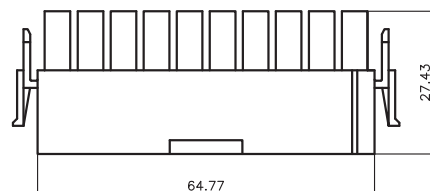


9635R-10




9635R-06








9635R-09





9635R-12



9635R-15



E				DRAWN: Sea	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: .250"(6.35mm) Power Receptacle	SIZE A4
D			CHECKED: Jeremy Liu					
C				APPROVAL: MIKE WU	SCALE: 1:1	PART NO: 9635R-XX		
B					SHEET: 2 / 1			
A	22-Mar-2007	(PC0001)	Sea		PROJECTION: 			
REV	DATE	FILE	BY					