


Connector >> D-sub Series >> DS



Contact Resistance	30 mΩ ,max. at DC 100mA
Insulator Resistance	1000 mΩ ,min. at DC 500V
Current Rating	5AMP
Withstanding voltage	AC1000V/1Min
Operating temperature	-55°C~+105°C
Contact	Brass
Housing	PBT & 30% Glass Fiber(UL94V-0)

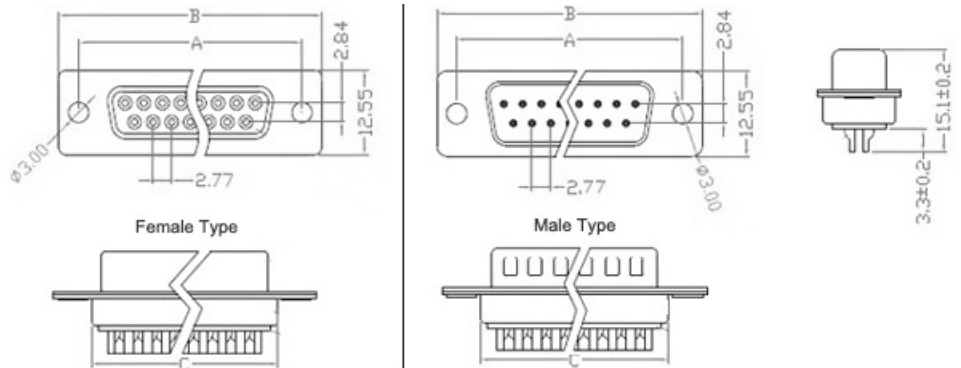

Position	A	B	C	D	E
9P	16.92	24.99	30.81	19.36	16.33
15P	25.25	33.32	39.14	27.64	24.66
25P	38.96	47.04	53.04	41.08	38.38
37P	55.42	63.50	69.32	57.38	54.84

How To Order :

DS	-	9	-	F	-	B	-	
Series No.		No. of Poles		Item Type		Color		Customer Request
		9 / 15 / 25		F: Female		B. Blue		
		37 / 50		M: Male		K. Black		
						W. White		