

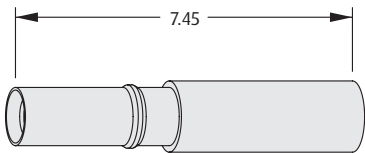
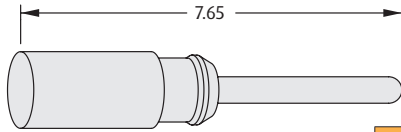
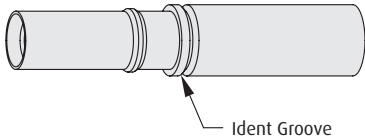

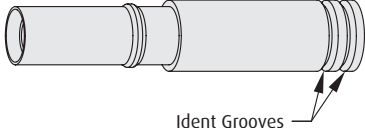
# Datamate J-Tek Connectors

## Spare Female Crimp Contacts

- Barrel Crimp Contacts are supplied with the connectors - see previous page. Use the order code for extra spare crimps.



DATAMATE J-TEK

CRIMP CONTACTS	DUMMY CONTACT
<p><b>Large Bore (22 AWG)</b></p> 	 <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-left: auto; margin-right: auto;"> <p><b>ORDER CODE</b> M80-023</p> </div>
<p><b>Small Bore (24 to 28 AWG)</b></p> 	<p><b>WIRE STRIPPING DETAILS</b></p> 
<p><b>Extra Small Bore (28 to 32 AWG)</b></p> 	<p><b>TOOLS</b></p> <p><b>Recommended Crimp Tool</b> - M22520/2-01  <b>Positioner</b> - T5747  <b>Contact Insertion/Removal Tool</b> - Z80-280</p> <ul style="list-style-type: none"> <li>Pre-cabled contacts shown on following page.</li> <li>Instruction sheets available at <a href="http://www.harwin.com/instructions">www.harwin.com/instructions</a>.</li> </ul>

### HOW TO ORDER

**M80 - OXX 00 XX**

**SERIES CODE**

TYPE	
<b>011</b>	Large Bore (22 AWG)
<b>013</b>	Small Bore (24-28 AWG)
<b>019</b>	Extra Small Bore (28-32 AWG)

**FINISH**

<b>01</b>	Gold + Tin
<b>05</b>	Gold

All dimensions in mm.