


DC/DC CONVERTERS

Case No. : H

Pinout : A

UNIT : inch(mm)
TOLERANCE :
.X = ± 0.80 mm
.XX = ± 0.50 mm

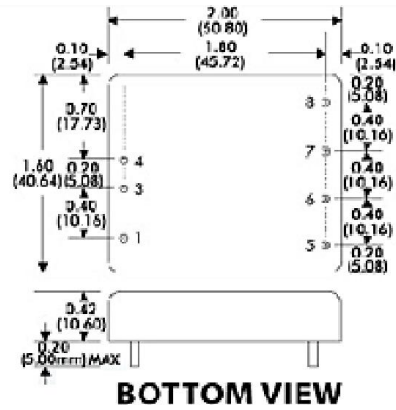

M Series 10W DC/DC CONVERTERS


	Model No.	Input Voltage	Output Voltage	Output Current	CASE
TRIPLE OUTPUT	M-1205-12D	12 VCD (9-18)	+5 /+12 / -12 VCD	1000/200/200mA	HA
	M-1205-15D		+5 /+15 / -15 VCD	1000/150/150mA	HA
	M-1205D-12		+5 /-5 / +12 VCD	1000/500/200mA	HA
	M-1205D-15		+5 /-5 / +15 VCD	1000/500/150mA	HA
	M-2405-12D	24 VCD (18-36)	+5 /+12 / -12 VCD	1000/200/200mA	HA
	M-2405-15D		+5 /+15 / -15 VCD	1000/150/150mA	HA
	M-2405D-12		+5 /-5 / +12 VCD	1000/500/200mA	HA
	M-2405D-15		+5 /-5 / +15 VCD	1000/500/150mA	HA
	M-4805-12D	48 VCD (36-72)	+5 /+12 / -12 VCD	1000/200/200mA	HA
	M-4805-15D		+5 /+15 / -15 VCD	1000/150/150mA	HA
	M-4805D-12		+5 /-5 / +12 VCD	1000/500/200mA	HA
	M-4805D-15		+5 /-5 / +15 VCD	1000/500/150mA	HA



DC/DC CONVERTERS

Case No. : H

Pinout : A

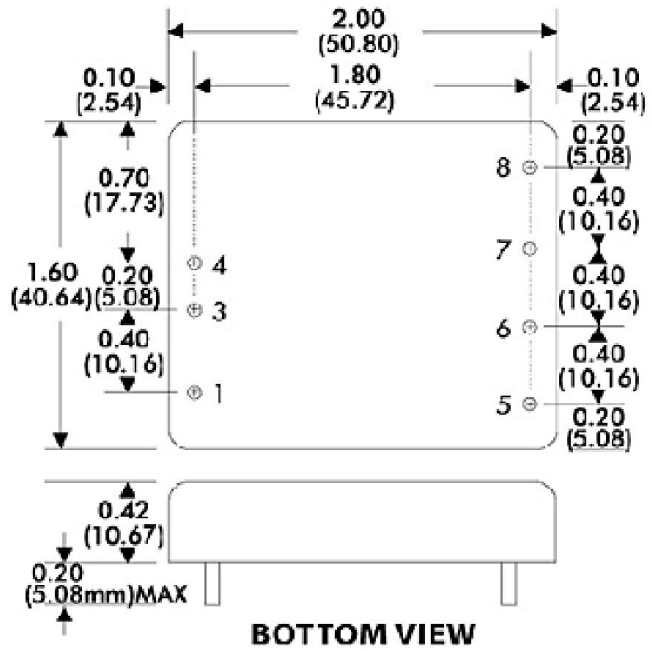

UNIT : Inch(mm)
TOLERANCE :
.X = ± 0.80 mm
.XX = ± 0.50 mm

M Series 20W DC/DC CONVERTERS

	Model No.	Input Voltage	Output Voltage	Output Current	CASE
SINGLE OUTPUT	M-2405	24 VCD (18-36)	+5 VCD	+4000mA	HA
	M-2412		+12 VCD	+1666mA	HA
	M-2415		+15 VCD	+1333mA	HA
	M-2424		+24 VCD	+833mA	HA
	M-4805	48 VCD (36-72)	+5 VCD	+4000mA	HA
	M-4812		+12 VCD	+1666mA	HA
	M-4815		+15 VCD	+1333mA	HA
	M-4824		+24 VCD	+833mA	HA
DUAL OUTPUT	M-2405-05	24 VCD (18-36)	+5 VCD	+/-2000mA	HA
	M-2412-12		+12 VCD	+/-833mA	HA
	M-2415-15		+15 VCD	+/-666mA	HA
	M-2424-24		+24 VCD	+/-416mA	HA
	M-4805-05	48 VCD (36-72)	+5 VCD	+/-2000mA	HA
	M-4812-12		+12 VCD	+/-833mA	HA
	M-4815-15		+15 VCD	+/-666mA	HA
	M-4824-24		+24 VCD	+/-416mA	HA

