


1.5c-2v coaxial cable PTL195(LMR) of China supplier solid

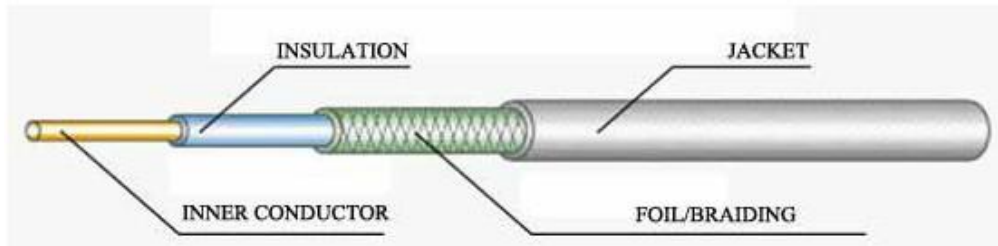

Product Details

Place of Origin: Zhejiang, China

Brand Name: PTL

Model Number: PTL195(LMR) of China supplier solid

center conductor: CCS/CCA/CU

Dielectric: Foam PE

Jacket: PVC

Braid shield material: TC,CCA,CCS,Al-Mg

lmr195 Jacket color: according to requirements

lmr195 attenuation: the lowest loss of any flexible cable

lmr195 inal Velocity of Propagation: 80%

lmr195 Impedance(Ohm): 75

lmr195 Dielectric Withstand Voltage: 3000 ACV/min

lmr195 Cable Assemblies: All types are available as pre-terminated cable assemblies

Type: Coaxial

Packaging & Delivery

Packaging Details

1.5c-2v coaxial cable lmr195 of China supplier solid:350m/wooden reel,500m/wooden reel,1000m/wooden reel. We can available according to client's request.

Port : shanghai/Ningbo

Specifications :

Detailed Information

Basic Structure		
Component	Diameter	Material
Conductor	Material	Solid Copper
	Nom. Dia.	0.94mm
Dielectric	Material	Foam PE
	Nom. Dia.	2.79 mm
Shield	Material	Bonded Al Foil + Tinned Copper

	Nom.Dia.	3.53
Jacket	Material	PVC
	Nom. Dia.	4.95mm

Electrical Characteristics	
Nominal Impedance(Ohm)	75±20hm
Nominal capacitance(pF/m)	79.7nF/m (Nom.
Velocity of Propagation (%)	80
Cutoff Frequency(GHz)	41
Dielectric Withstand Voltage	3000 ACV/min

Attenuation	
Frequency(MHz)	Maximum(dB/100m)
50	8.4
150	14.6
220	17.7
450	25.5
900	36.5
1500	47.7
1800	52.5
2000	55.4

Applications:

- 1) CATV-community antenna television
- 2) CCTV-closed-circuit television
- 3) DBS-direct broadcasting satellite

Inner Packing:

100m/roll, 200m/roll,300m/roll,100yards/roll;200yards/roll;300yards/roll
305m (1,000ft) wooden reel, wooden drum, plastic drum

Outer Packing:

Wooden Drum, Carton Box, Pull Out Box